


PCC Shall be filled as per Vendor after installation of sliding Door.
Rail top & Floor top shall be at same level.
Gap around rail shall be minimum to make smooth operation.

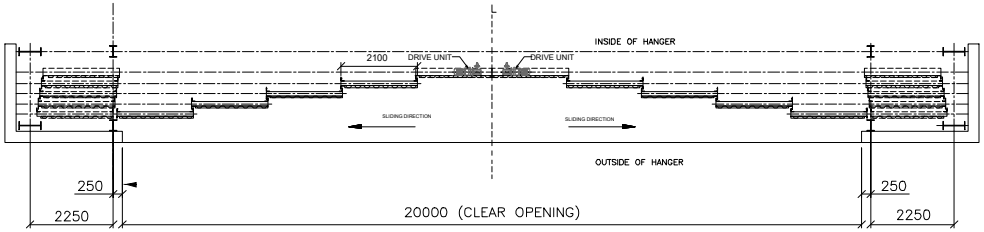

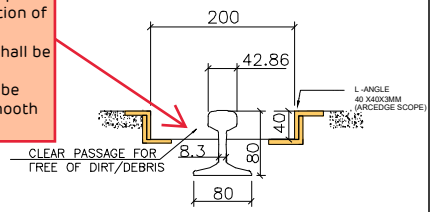


15KG/M RAIL DETAILS



GUIDE BEAM– H-BEAM







Rev - 01
STRUCTURE HEIGHT CHANGE 5050 MM TO 4500 (FINISHED FLOOR TO STRUCTURAL BEAM)

Rev - 02
STRUCTURE HEIGHT CHANGE 4500 MM TO 6000 (FINISHED FLOOR TO STRUCTURAL BEAM)

Rev - 03
STRUCTURE HEIGHT CHANGE 6000 MM TO 6250 (FINISHED FLOOR TO STRUCTURAL BEAM)

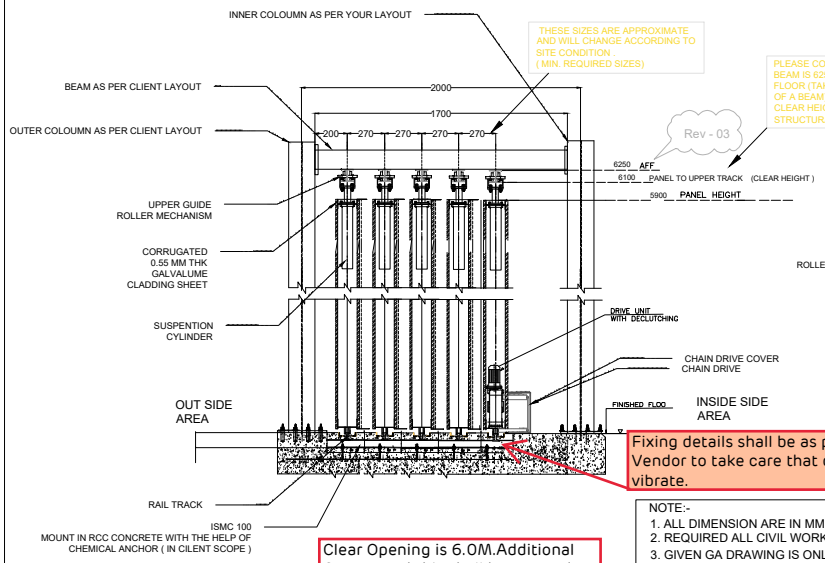

Fixing details shall be as per vendor.
Vendor to take care that during operation rail should not vibrate.

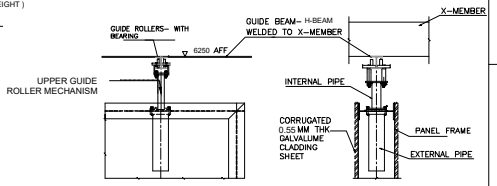

TELESCOPIC TOP ASSEMBLY

Clear Opening is 6.0M.Additional Gap around this shall be covered with puff.

NOTE:-
1. ALL DIMENSION ARE IN MM
2. REQUIRED ALL CIVIL WORK WILL BE IN CLIENT SCOPE
3. GIVEN GA DRAWING IS ONLY FOR THE CLIENT APPROVAL PURPOSE
4. DIMENSION AND LEAF PANEL ARE MAY VARY AS PER SITE CONDITION.

TECHANICAL SPECIFICATION -

DOOR SIZE - 20000MM X 6250MM (INCLUDE I-CHANEL)
CLEAR OPENING - 20000MM X 6100 (CLEAR HEIGHT IS DEPEND ON STRUCTURAL BEAM DEFLECTION.)
NUMBER OF PANEL - 10 Nos. (5 PANEL EACH SIDE)
PANEL SIZE - 2100MM X 5900MM
NUMBER OF MOTORS - 2 Nos.

EACH DOOR LEAF IS TO BE SUPPORTED AT THE BOTTOM ON 2 Nos.
EACH DOOR LEAF IS TO BE SUPPORTED AT THE TOP ON 2 Nos.
MOTOR MOUNTING ON PANEL NO. 5 & 6.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE	DOOR AUTOMATION		NIHVA TECHNOLOGY PVT. LTD. PUNE
	SIGN	DATE	Email:- Sales@nihva.com Website:- www.nihva.com
DRAWN	J.P	30/01/26	CLIENT - ARCEDGES BUILDING INDIA LLP
CHECK	B.S	30/01/26	PROJECT -BI-PARTING TELESCOPIC SLIDING HANGER DOOR
APPROVAL	V.T	30/01/26	
REV	03		SITE - HYDERABAD
If any queries contact : Design@nihva.com			SCALE: 01 WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			DWG. NO. : NIHVA/25-26/178