TECHNOLOGY NUCLEUS
1, Pranav Apartments, Guru Ganesh Society
613/1+2, Bibwewadi-Kondhwa Road, Pune 411037, MH, India.
E-mail: rahul.bhalgat@technologynucleus.com
GSTIN: 27ABEPB4431D1ZB

Purchase Order

P O number: 1076DM R1	P O Date: 05 February 2021	
Design approval: 10th Feb 2021	Inspection: 05 - 10 March 2021	Delivery: Upon inspection

Supplier:	GST No.	Kind Attention:
NIHVA Technologies Pvt. Ltd. 187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad, Pune – 411019 Phone: +91 85510 91333 Email: sales@nihva.com	27 AAECN 0437H1 ZM	Mr. Vijay Tarak (MD) Email: sales@nihva.com Mr. Rohit Kadgave (Project Manager) Mobile: 89566 14106 E-mail: automation@nihva.com

Deliverables and price (Cage welding machine):

Sl. No.	Description	HSN	Quantity	Rate (Rs.)	Total (Rs.)
1	Pivoted translating conveyor for concrete, with hopper. Scope and specifications as per Annexure A.	84	01 no.	5,03,000/-	5,03,000/-
	In words: Rs. Five lakhs three thousand only. GST 18% extra, Transport and packing / forwarding extra.				

Payment terms:

a) 10% advance payment against the acceptance of this order.
b) 40% advance payment against the design approval.
c) Balance against proforma invoice before dispatch, after inspection.

Sweek from receiving of advance.

Delivery:
The equipment shall be presented to us for inspection in assembled condition at your factory between ~~05th and 10th~~ March 2021. The equipment shall be dispatched upon inspection for scope, specifications and performance.

The delivery date has been specified only after taking concurrence from the supplier. Timely delivery is the essence of this P O and the supplier must adhere to the specified delivery date. The possible delay because of factors beyond your control shall be communicated in advance, stating the reasons and the likely period of delay. In the event of delay in delivery, we have right to cancel the P O, with all the repercussions to the account of the supplier. In such a case no payment will be due to the supplier and the advance payments made in connection with this P O shall be returned by the supplier within 4 days of cancellation of the PO.

Prices: Prices are fixed till delivery and there is no price escalation clause.

For Technology Nucleus

Rahul Bhalgat

NIHVA TECHNOLOGIES PVT. LTD. * PUNE *

08/02/21.

TECHNOLOGY NUCLEUS
1, Pranav Apartments, Guru Ganesh Society
613/1+2, Bibwewadi-Kondhwa Road, Pune 411037, MH, India.
E-mail: rahul.bhalgat@technologynucleus.com
GSTIN: 27ABEPB4431D1ZB

Annexure A to the Purchase Order 1056DM dated 28th December 2018
Scope and specifications for the Automatic Cage Welding Machine, model CWC2730-24CNC.

Parameter		Value / details
1	Material to be conveyed	Freshly mixed non-flowing concrete, which is a mixture of crushed sand (particle size 0 to 6 mm), 10 mm gravel, 20 mm gravel, cement and water. Photograph of concrete on a conveyor belt is enclosed with this PO.
2	Material weight	Material in the hopper: 1350 kg Material on the belt: 350 kg, in the form of 450 mm wide x 50 mm thick layer on the belt. Total 1350 + 350 kg = 1600 kg weight is born by the skid plate below the belt.
3	Hopper dimensions	As per the drawing 2103 199 101 enclosed with this PO. The material (concrete) loaded into the hopper shall directly fall onto the conveyor belt, supported by a skid plate. The hopper shall have an opening, 450 mm wide x 50 mm high. When the conveyor runs, the material (concrete) shall come out of this opening to form a 450 mm wide x 50 mm high layer on the belt.
4	Belt	600 mm wide belt, running on a skid plate at a speed of 20 m/min (or less through VFD). Shall have appropriate material, construction and thickness for the application. The side plates, 455 mm apart, shall run on both sides of 450 mm wide material (concrete) layer on the belt. Flexible lips to be provided below the side plates to prevent material / slurry from escaping.
5	Conveyor length	5900 mm drum center to drum center.
6	Drive and drum	Drum diameter 240 mm, driven by 5 HP or 7.5 HP geared motor at around 25 rpm. Motor and gearbox rating to be confirmed at design stage. Motor make: ABB / Siemens / Bharat Bijlee. Gearbox: Bonfigloli / Nord / SEW / Elecon.
7	Conveyor translation and pivoting motions	The conveyor shall move to-and-fro by 3275 mm on the base frame. This motion shall be motorized, on wheels inside the guides. Translation speed: 6 – 12 m/min. The end positions of the 3275 mm stroke shall be as shown in the drawing 2103 199 101 enclosed with this PO. The base frame itself shall move by +/- 20° around the pivot point shown in the drawing 2103 199 101 enclosed with this PO. This motion shall be executed manually. The base frame shall have 3 rollers (running on spherical plain bearings) on a PCD at a height of around 1 m. These rollers shall run around a circular guide-plate anchored on the floor through a pillar. The positions of the legs of the base frame also shall be as per the drawing 2103 199 101 enclosed with this PO.
8	Material of construction	Mild steel


NIHVA TECHNOLOGIES PVT. LTD. * PUNE *

TECHNOLOGY NUCLEUS
1, Pranav Apartments, Guru Ganesh Society
613/1+2, Bibwewadi-Kondhwa Road, Pune 411037, MH, India.
E-mail: rahul.bhalgat@technologynucleus.com
GSTIN: 27ABEPB4431D1ZB

Parameter		Value / details
9	Electrical supply and panel details	3-phase 400V, 50 Hz electrical supply will be given at single point. The supplier to confirm the incoming cable size at the design approval stage. Panel shall be dust proof. There shall be adequate inside volume for air circulation for the VFD. Contactor / MCB / Overload relay: Telemechanique / Siemens Relay: Omron, coil voltage 24V DC Limit switch: BCH Push buttons: Telemechanique with transparent rubber caps. Wires: Polycab / Finolex, with numbered ferrules. VFD: Yaskawa, operating on 0-10V input via a pot on the panel. VFD bypass switch (with star delta circuit for direct operation) shall be given on the panel. Operating elements like push buttons, selector switches, pot etc. shall not be selected merely on electrical rating, these shall be big and sturdy physically.
10	Documents to be supplied	Electrical circuit diagram with components list and panel layout. Operation and maintenance manuals of all bought-outs like gearbox, VFD etc.
11	Warrantee	1 year from the date of commissioning or 15 months from the date of dispatch, whichever is earlier.
12	Color	Epoxy primer + PU paint in 2 shades. The shades to be confirmed at the design approval stage.

End of the document

NIHVA TECHNOLOGIES PVT. LTD. * PUNE *

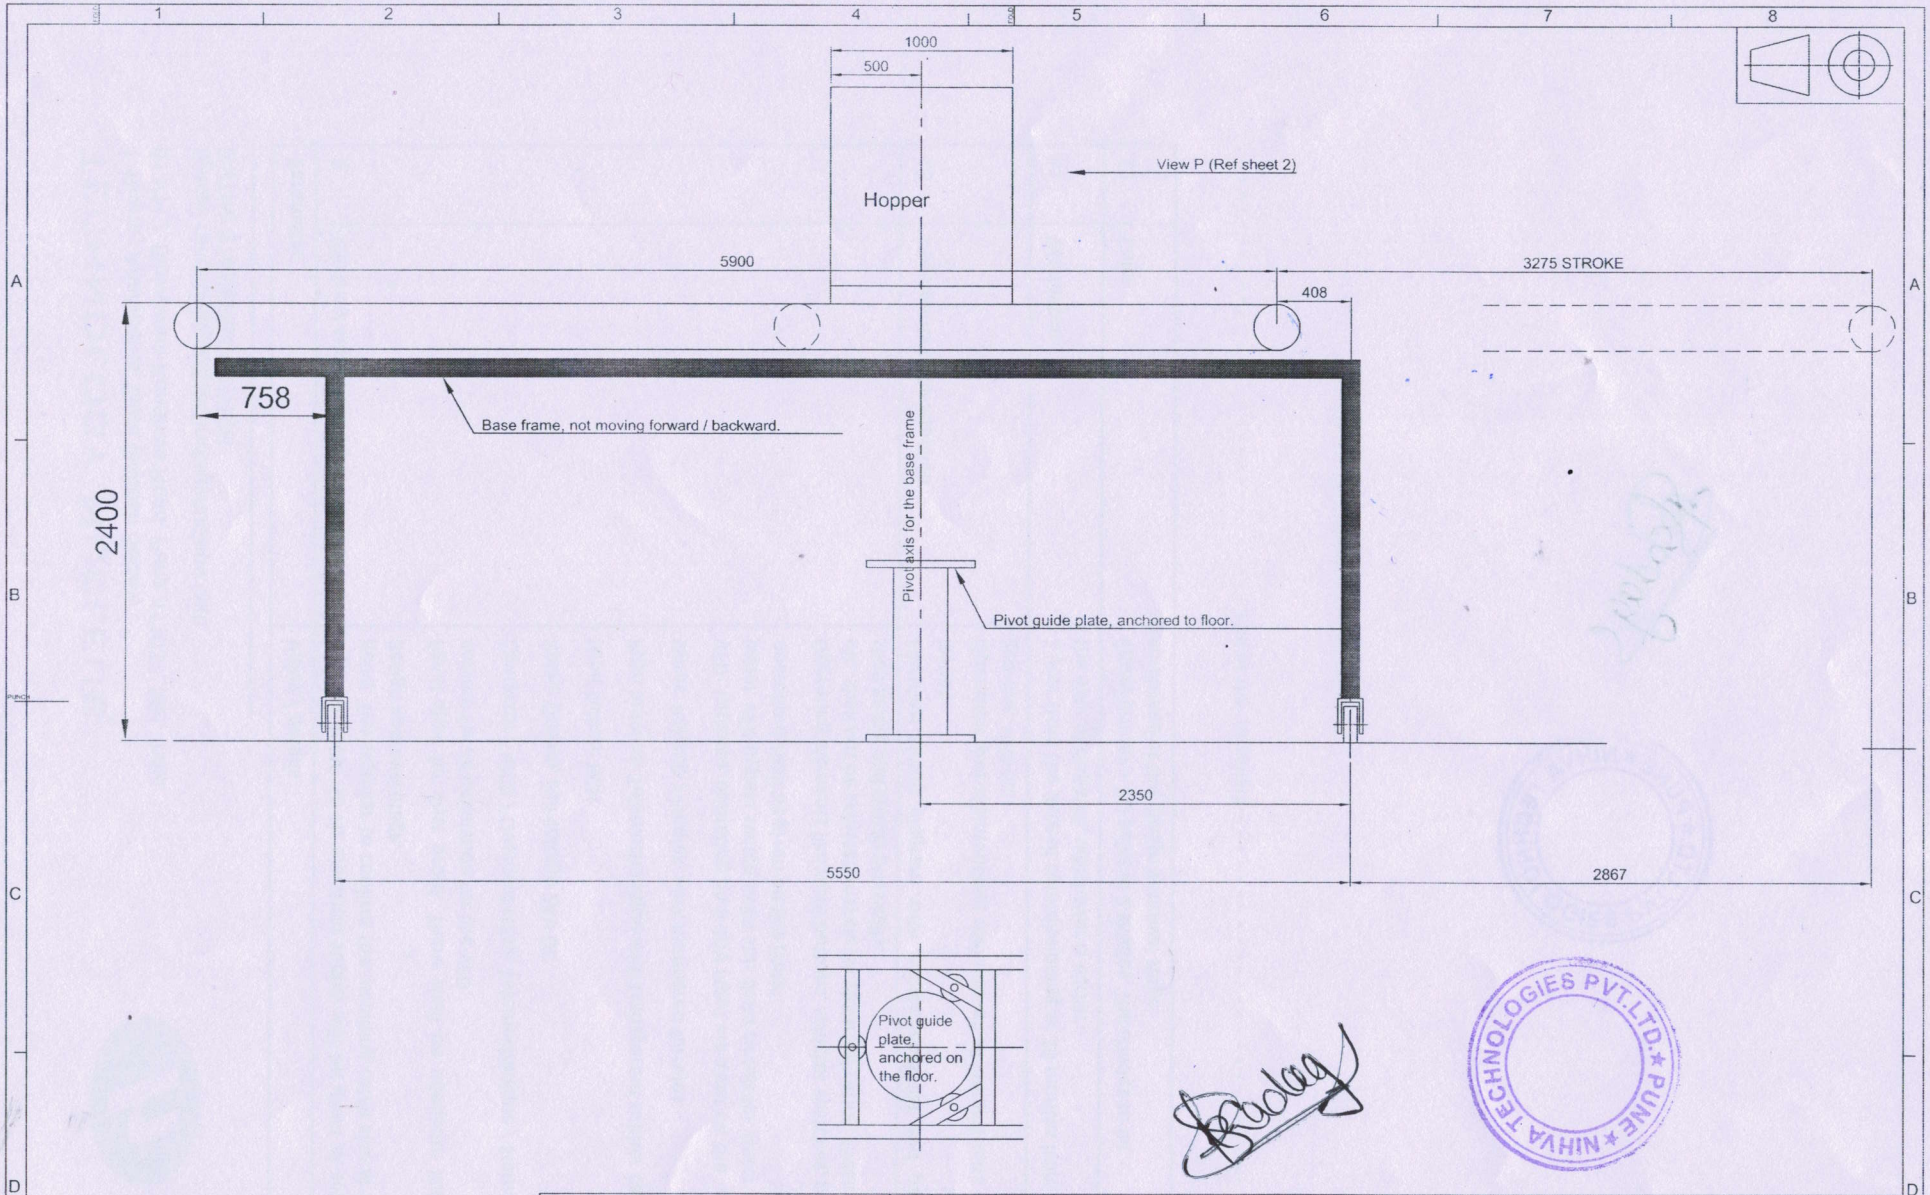

This drawing and the information contained therein is the intellectual property of TECHNOLOGY NUCLEUS.. This should not be sold or disclosed or passed-on to any other agency without written permission from TECHNOLOGY NUCLEUS.

	SIGN.	DATE
DRN.	RMB	04FEB21
CHD.	RMB	04FEB21
APPD.		

R0	04FEB21	RELEASE	A2, B2

REVISION HISTORY

Designed by:
TECHNOLOGY NUCLEUS
Pune 411037. Tel:+ 91 9890053053
Email: rahul.bhalgat@technologynucleus.com


TITLE:
Pivoted translating conveyor for concrete.

Part Number: 2103 199 101

Revision: R0

Sheet No.- 1 of 2

A3

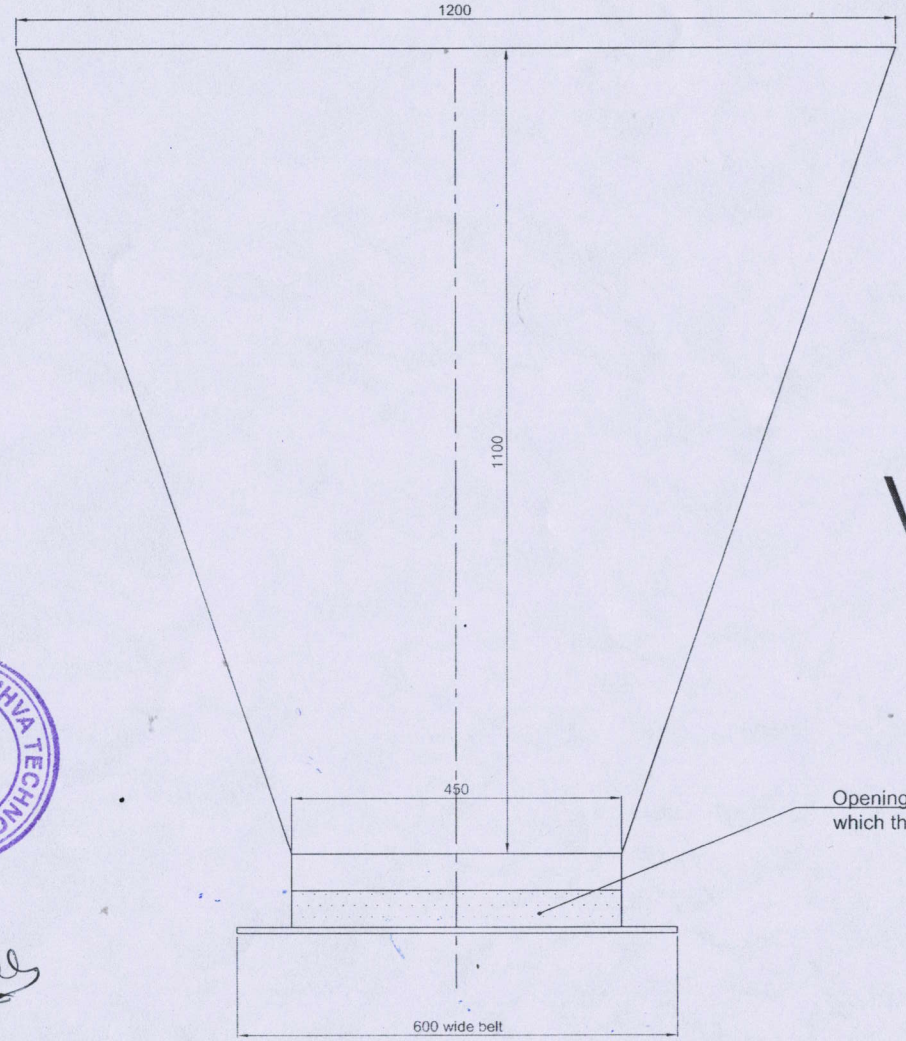

View P

Opening in the hopper, through which the concrete comes out.

PUNE ★ NIHVA TECHNOLOGIES PVT.LTD. ★ PUNE

This drawing and the information contained therein is the intellectual property of TECHNOLOGY NUCLEUS.. This should not be sold or disclosed or passed-on to any other agency without written permission from TECHNOLOGY NUCLEUS.

	SIGN.	DATE
DRN.	RMB	04FEB21
CHD.	RMB	04FEB21
APPD.		

Designed by:
TECHNOLOGY NUCLEUS
Pune 411037. Tel:- 91 9890053053
Email: rahul.bhalgat@technologynucleus.com

R0	04FEB21	RELEASE

REVISION HISTORY

TITLE:
Pivoted translating conveyor for concrete.

Part Number: 2103 199 101
Revision: R0
Sheet No.- 2 of 2

A3