NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Sales Quotation

Quotation No - SQT/19-20/1767 **Date : 01-07-2019**

Rahul Foods.
Nagpur.

Kind Attn: Mr. Rahul Dhakate
Email: rdrahul2587@gmail.com
Contact No : 9021509740

Project Name And Location : Rahul Foods, Nagpur

Subject : Quotation for NIHVA Make Dock Leveller


Dear Sir


Thank you for your opportunity and trust shown on "NIHVA." your preferred partner for innovative solutions.
This has reference to your above mentioned requirement as well as our subsequent communication; please find below our best offer.

Commercial Offer

Sr.No	Description	Qty	Unit	Rate In INR	Net Amount INR
A	**Dock Leveler (NIHVA Make)** **2 cylinder for Deck & 1 cylinder for LIP Operator by Standard Control Panel (Deck Up / Down / Lip Up / Down) Rubber Bumpers.**				
1	**Dock Levelers Capacity 6 Ton** Size : (W) 2000mm X (L) 2500 mm Supply + Installation + Transport	1	No	2,55,000	**2,55,000**

Dock Leveler Image & Technical Specifications

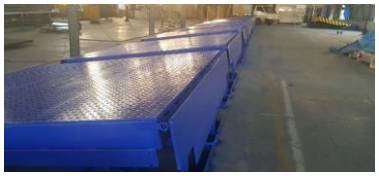



Sr. No.	Description	Specifications
1	Capacity	6 Ton
2	Dock operation mode	AC power pack hydraulically operated
3	Lip operation mode	Hydraulic
4	Operation control	Through panel
5	Loading platform height from road	1250mm
6	Travel above & below dock level	(+) 300 / (-) 250 mm
7	Platform Size (W x L)	2000 mm x 2500 mm
8	Lip size (W x L)	2000 x 400 mm
9	Shut Height	480 mm
10	Overall length	2000mm x 2500mm + Lip Length (400mm)
11	Maximum slope can be achieved	10%
12	Clear Pit dimensions (W x L x D)	(W) 2050mm x (L) 2550 mm x (D)485 mm
13	Hydraulic power pack	Standard
14	Driver type	Direct by electric Motor
15	Motor Ratings	1 H.P
16	Pump design flow	2.5 LPM
17	Pump pressure	120 bar Operating 200 bar Max.
18	Safety valve set pressure	120 Kg/cm²
19	Pump Type	Gear
20	Volume of oil receiver	7 Lit
21	No Of Deck cylinder	2 No
22	Lip Cylinder	1 No
23	Dock Bumper	Pair of Dock Bumper

GST Pune	**27AAECN0437H1ZM**

HSN Code: 84289090 SAC: 998732

General Prerequisites Required at Site

1 Finished Flooring after curing (Without Water)
2 Electrical Supply on the site single phase/three phase points at different places.
3 Provide electrical cables near to the installation machinery
4 Fork lift/crane to be provided if required

Limit of Supply

1 Provide place to store the material to be installed .
2 Be responsible for the safe custody of all material.
3 Provide place to safely store all the tools of installation
4 Provide change & rest room for the workers.

The supply included only those mentioned in the quote & does not include

1 Unloading from truck placement on site
2 Electrical connection for control panel.

Client Scope

1 Once our project gets complete for any additional work to & fro loading &boarding of our service technicians is in client scope
2 Any civil / masonry/structural work required to support are in client scope
3 All structure support is in client scope
4 NIHVA Will provided structure drawing only if required
5 Exiting/Repair/ Modification/ Refurbishment charges will be extra.

Terms and Conditions :

1	**Price**	:	Ex works Pune
2	**P & F Charges**	:	@ 3 % of total supply value
3	**Freight Notes**	:	Inclusive
4	**Delivery**	:	5 -6 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing approval.
5	**Payment**	:	80% Along with Purchase Order and balance 20% before dispatch
6	**Insurance**	:	Extra as applicable
7	**Taxes**	:	GST Extra @ 18%
8	**Validity**	:	Validity of Offer is 15 days from the date of quotation
9	**Warranty**	:	12 months from the date of supply.

If there is any query please feel free to contact Mr. Ravindra Kharat on 8551096333.

With Best Regards
Priyanka
2066304033
For NIHVA Technologies Pvt Ltd