


DOCK LEVELER OVERALL SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2200	3000	485	400


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2250	3025	485	

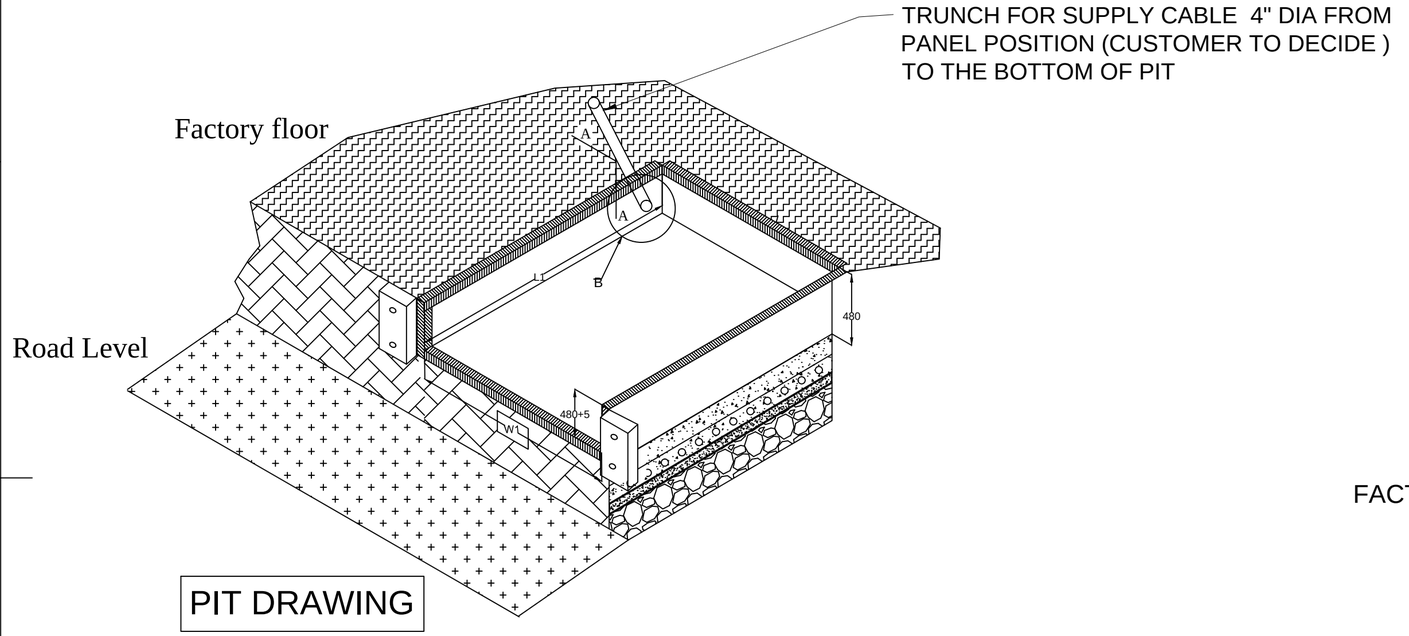


PIT DRAWING

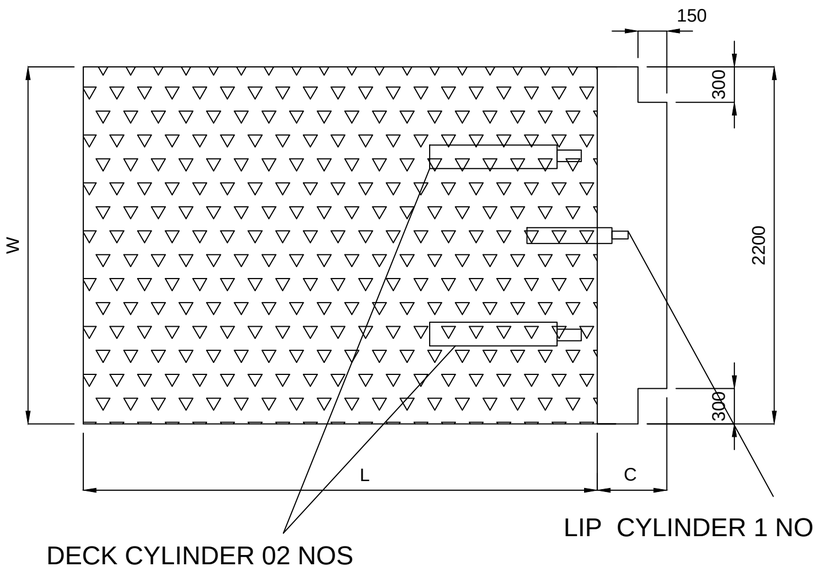

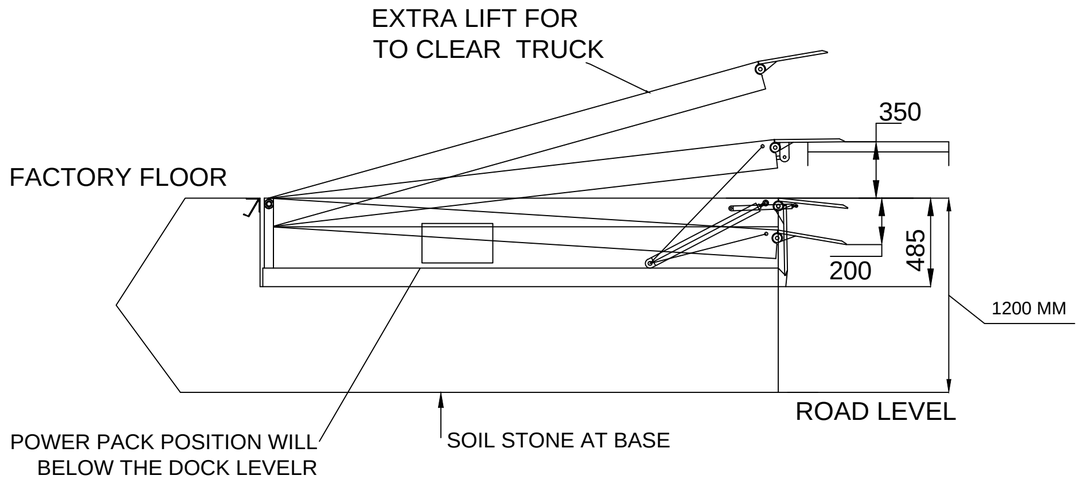

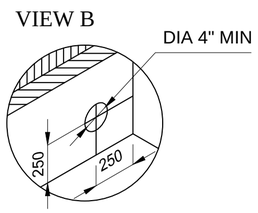

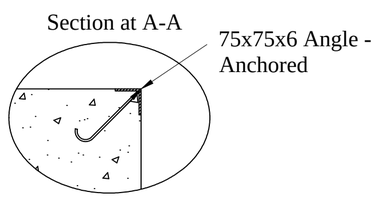

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 18000 KG POINT FLOOR LOADING.
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM
6. THIS DRAWING IS FOR CLIENT UNDERSTANDING PURPOSE ONLY AND ACTUAL SPECIFICATIONS MAY VARY.

DOCK LEVELER- 12 TON CAPACITY

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER

	NAME	SIGN	DATE
DRAWN	G.P		5.2.2022
CHECK	A.K		5.2.2022
APPRD.			

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com
NIHVA TECHNOLOGIES PVT. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - RATNAROOP PROJECTS

PROJECT - OM LOGISTIC

SITE LOCATION - CHAKAN

If any queries contact : design@nihva.com

DWG. NO. : NIHVA/21-22/CLT/333 REV- 00

ALL DIMENSION ARE IN mm

SCALE: NTS WT: SHEET: 01 OF 01