
DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPERS SIZE (OPTIONAL)
	2000	2490	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	2540	485	


CAPACITY - 09 TON- 01 NO.

CONTROLS : 2 PUSH BUTTONS FOR DECK UP & DOWN.
2 PUSH BUTTON FOR LIP UP & DOWN.

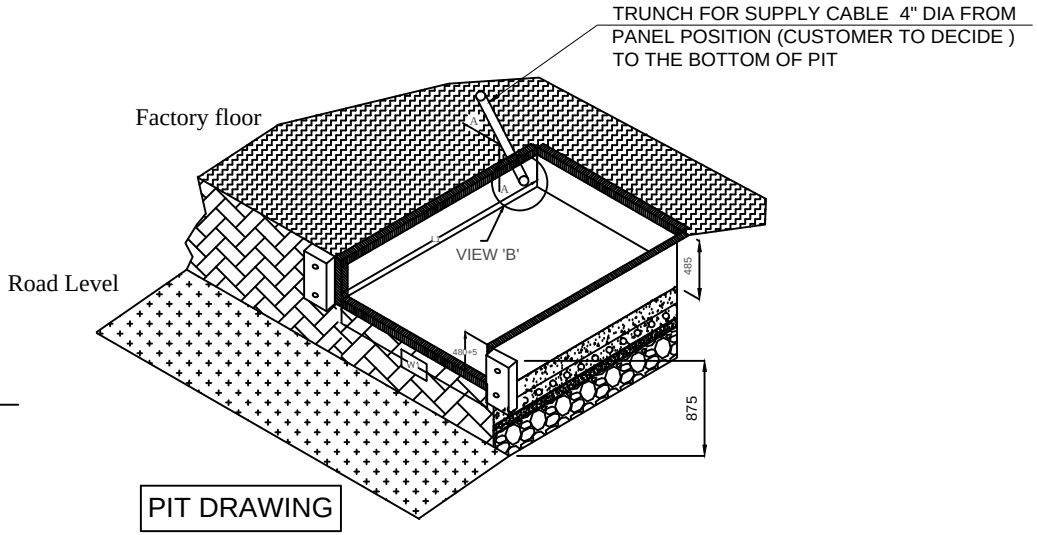


PIT DRAWING

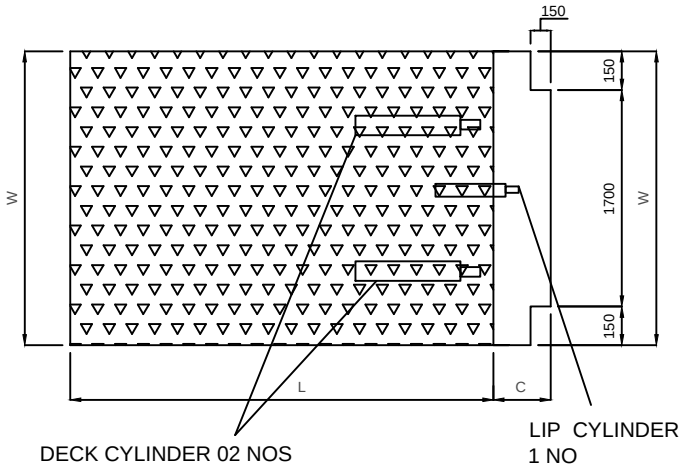


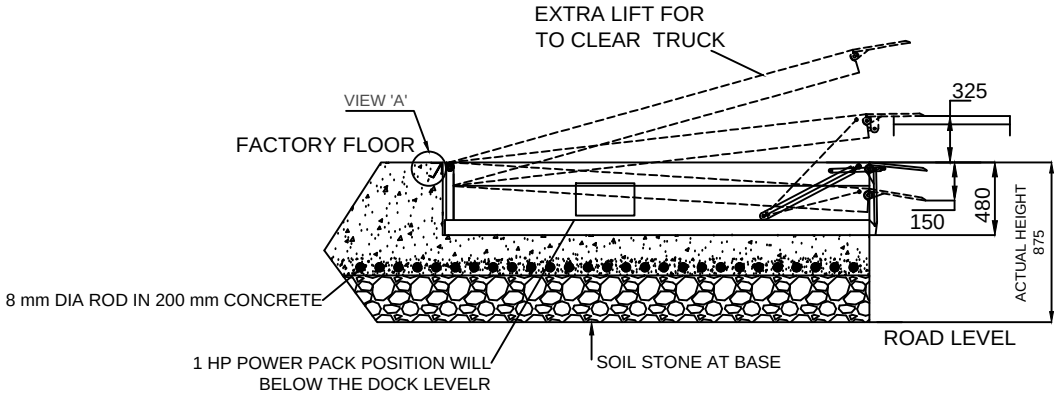

VIEW B



VIEW A



DOCK LEVELER-

IMP NOTE: -

1.CAPACITY : 09 TON .
2.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
3.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.
4.PROPER DRAINAGE SHOULD BE DONE.
5.TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM).
6.LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING.
7.MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED).
8.FABRICATION TOLERANCE WILL BE +/- 10 MM.
9.ALL CIVIL WORK WILL BE IN CLIENT SCOPE.

REV NO	DATE	DRAWN	REMARK
R02	24.04.19	P.A	DOCK HEIGHT CHANGE
R01	23.04.19	P.A	DOCK HEIGHT & PIT DEPTH CHANGE

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
DOCK LEVELER - 09 TON

	NAME	SIGN	DATE
DRAWN	A.K.		18.04.19
CHECK	P.A.		18.04.19
APPRD.	V.T.		18.04.19

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - NORTH EAST PHARMA PACK
PROJECT -
SITE LOCATION - SIKKIM
DWG. NO. : NIHVA/19-20/0007/R02 | REV- R02
SCALE: NTS | WT: | SHEET: 01 OF 01