


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2070	2940	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2120	2990	485	

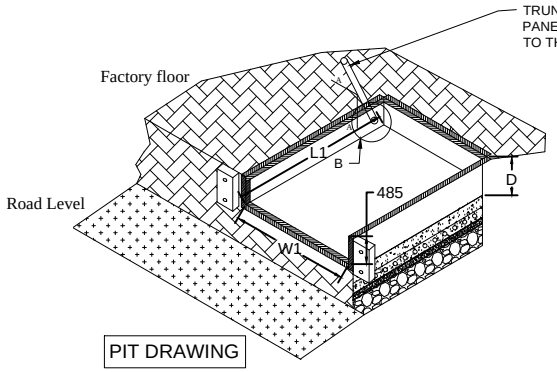

PIT DRAWING






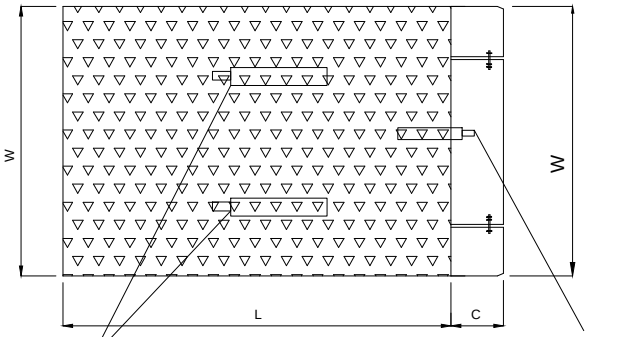

DECK CYLINDER 2 NOS

LIP CYLINDER 1 NOS

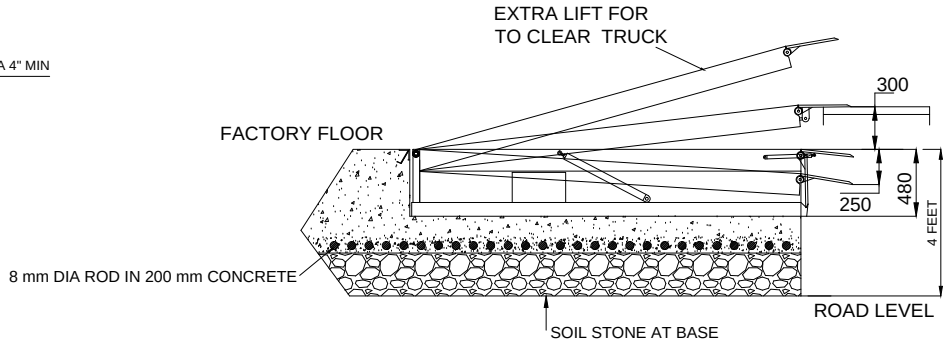

REV NO	DATE	DESCRIPTION
REV -0	09/01/18	INITIAL DRAWING
REV -1	11/01/18	DOCK LEVELER SIZES REVISED AS PER ACTUAL PIT DIMENSIONS.

DOCK LEVELER- 6 TON CAPACITY

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 10000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

CLIENT APPORVAL-	DATE	SIGN.
DRAWN :- OMKAR	09/01/2018	
CHECKED :- S.S.	09/01/2018	
APPROVED :- S.S.	09/01/2018	
ALL DIMENSION ARE IN mm		
If any queries contact : design@nihva.com		

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - Zamil Construction India Pvt.Ltd.

PROJECT -

SITE -

DWG. NO. - NIHVA/17-18/0331 | Rev- 1