NIHVA TECHNOLOGIES

WEIGHT ESTIMATION SHEET

CLIENT	Panchashil	DATE	2/21/2024
PROJECT	Manual Double Leaf Sliding Gate	LOCATION	Pune
FINISH SIZE	70 m x 5 m	PREPARED BY	Jayesh


SR	DESC	DETAILS	MATERIAL GRADE	SP.GRAVITY	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK	Rate/ Piece Rate / kg
1	SINGLE LEAF (5300 mm X 4900 mm)	Tube - Outer Frame	MS	7.85		100	50	3	15300	mm	1	104		₹ 0.00
		Tube - Outer Frame	MS	7.85		100	100	3	5300	mm	1	48		₹ 0.00
		Slat	MS	7.86		115	16	1.2	4800	mm	90	477	Vertically tapered weld at 30 degree	₹ 0.00
		Weight For Required Leaf								No's	14	8809		₹ 150.00
2	Bottom Track	En 8 Bright Hardchrome Bar	En8	7.85	20				70	M	2	345		₹ 150.00
		If ISMI 100 in our scope	MS	7.85					70	M	2	1400		₹ 150.00
		Bottom Side wheel Assembly (4 inch)	MS	7.85						No's	28	0	2 wheels to each leaf	₹ 1,800.00
3	Top Track	Bracket	MS	7.85		100		16	900	No's	28	336		₹ 150.00
		Nylon Roller with Bearing			100				250	mm	28	0		₹ 1,800.00
										Weight For Required Qty	1	11519		
										Weight Including Safety Factor	1.5	17279		


Mode Of Operation = Manual


Overlap Considered = 300 mm for Each Leaf

Gap between 2 Slats = 95 mm


REFERENCE IMAGE

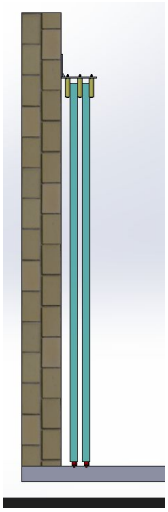


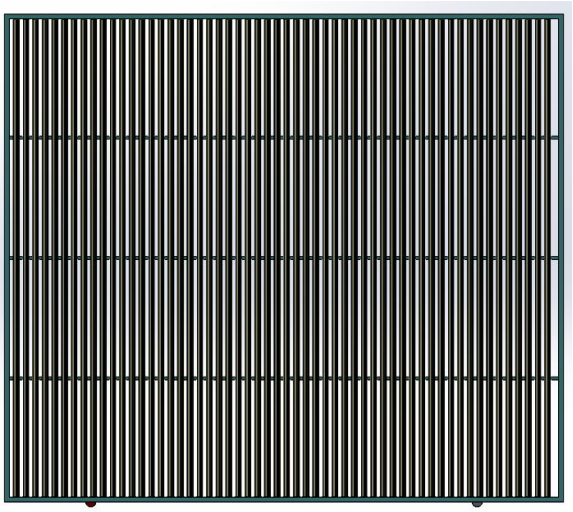

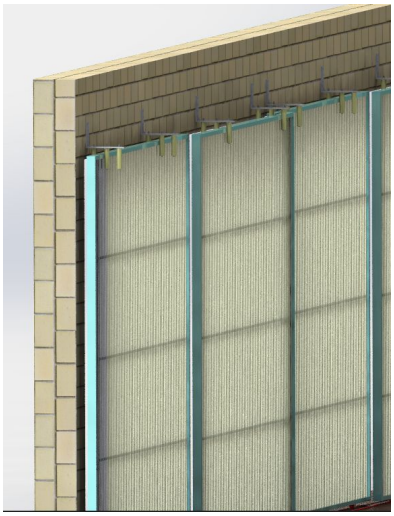



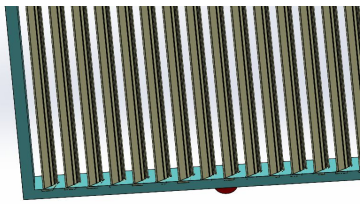

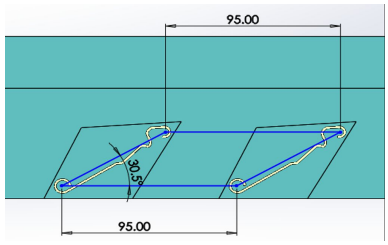

cost	Actual Rate
₹ 0.00	
₹ 0.00	
₹ 0.00	
₹ 1,321,317.77	₹ 72.00
₹ 51,762.90	₹ 85.00
₹ 210,000.00	₹ 70.00
₹ 50,400.00	₹ 1,300.00
₹ 50,400.00	₹ 85.00
₹ 50,400.00	₹ 1,500.00
₹ 1,734,280.67	₹ 842,344.84

Sr	Desc	Cost
1	Gate Cost from wt.Est.	₹ 1,734,281
4	Installation	₹ 40,000
5	Transport	₹ 150,000
6	SEAL	₹ 150,000
7	MISC	₹ 50,000
Total Cost		₹ 2,124,281
Grand Total		₹ 2,124,281

NIHVA TECHNOLOGIES

Client	Panchashil	DATE	2/21/2024
Project	Manual Double Leaf Sliding Gate	LOCATION	Pune
Finish Size	70 m x 5 m	PREPARED BY	Jayesh

SR	DETAILS	MATERIAL GRADE	length	UOM	Qty /Weight	UOM	Rate / Qty/kg	COST
Steel								
1	Outer Tube	TOP SIDE 100 X 100 X 3 & OTHER 100 x 50 x 3 mm	288.4	metre	2128	kg	150	₹ 319,200.00
2	Slat	75 curved Profile 1.2 mm thk GI	1260	Qty	6678	kg	150	₹ 1,001,700.00
3	En8 Round Bar- Bottom Track	Dia.20	140	metre	345	kg	150	₹ 51,750.00
4	I Beam- Bottom Track	100 * 4.8mm	140	metre	1400	kg	150	₹ 210,000.00
5	Steel for top track	BKT			336	kg	150	₹ 50,400.00
Accessories								₹ 0.00
1	Bottom Side Wheel				28	no	1800	₹ 50,400.00
2	Top side Nylon With Bearing				28	no	1800	₹ 50,400.00
3	Rubber Strip				70	metre	2200	₹ 154,000.00
Additional								₹ 0.00
1	Transport							₹ 200,000.00
2	Installation							₹ 50,000.00
3	Miscellenous							₹ 50,000.00
				TOTAL				₹ 2,187,850.00

Mode Of Operation = Manual

Single Leaf Size = 5300 mm x 5000 mm for Single Qty

Total = 14 no.Of Leafs

Overlap Considered = 300 mm for Each Leaf