


LOCATION - KUDCHI (COLLAGE MAIN ENTRANCE)

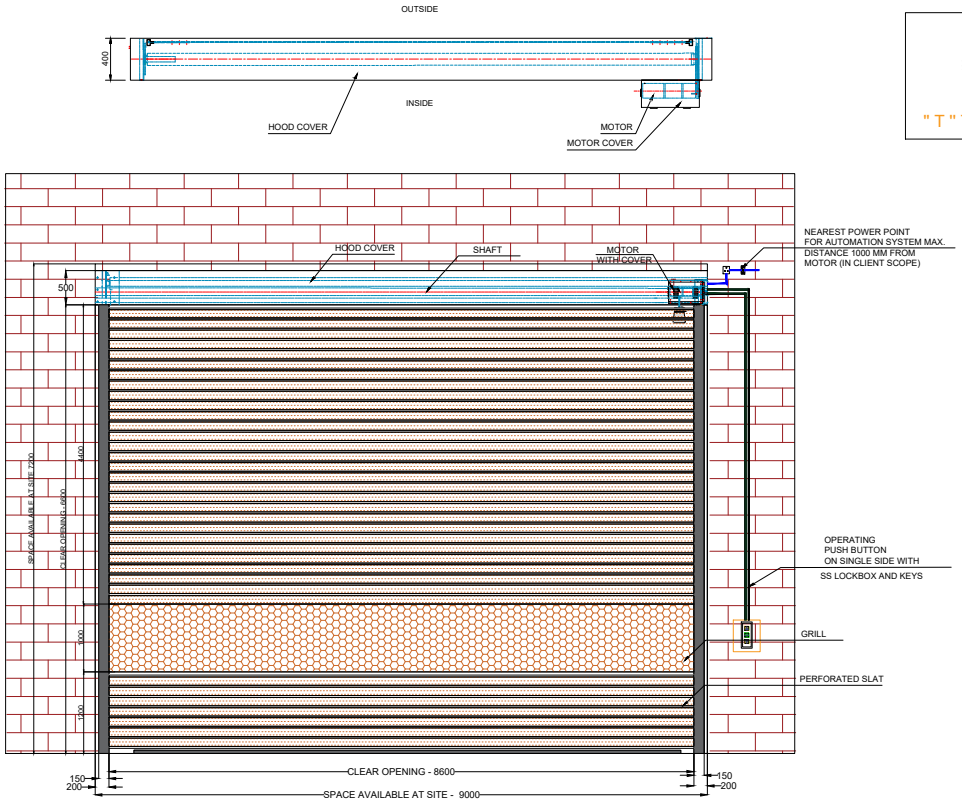



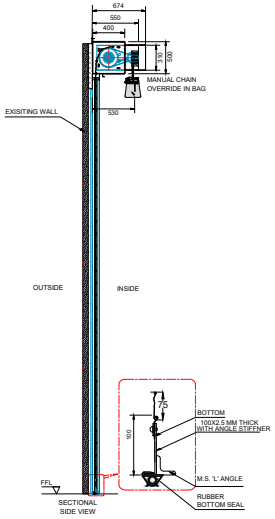

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE)
2.	LOCATION AREA	INSIDE AREA / OUTSIDE AREA
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL = ON CONCRETE/STEEL&SIDE
4.	SLAT	GI SLAT- 1.2 MM THICK (75 MM WIDTH)
5.	BOTTOM PROFILE	MS PLATE100 x 2.5 MM THICK WITH ANGLE STIFFENER.
6.	GUIDE PROFILE	M.S." T " SHAPED PROFILE 150X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
8.	SURFACE FINISH	SYNTHETIC ENAMEL PAINT
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	8600 mm	6600 mm	01

NOTE :-

1. All DIMENSIONS ARE IN MM.
2. HIGH LEX BOARD / INTERIOR SHEET/ PUFF PANEL REMOVER OR CUTTING IN CLIENT SCOPE

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER			NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	NAME	DATE	CLIENT - KLE Hospital
DRAWN	B.S.	30/09/2025	PROJECT - MOTORISED ROLLING SHUTTER
CHECK & APPROVAL	V.T.	30/09/2025	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/MP/1308001 REV-00
			SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com