


| DOCK LEVELER SIZE | WIDTH (W) | LENGTH ( L) | HEIGHT (H) | LIP (C) LENGTH | BUFFER SIZE (OPTIONAL) |
|---|---|---|---|---|---|
| | 2000 | 2500 | 480 | 400 | 200X300X100 |


| PIT DIMENSION | WIDTH (W 1) | LENGTH ( L 1) | DEPTH (D) | ALL DIMENSIONS ARE IN mm |
|---|---|---|---|---|
| | 2050 | 2580 | 485 | |

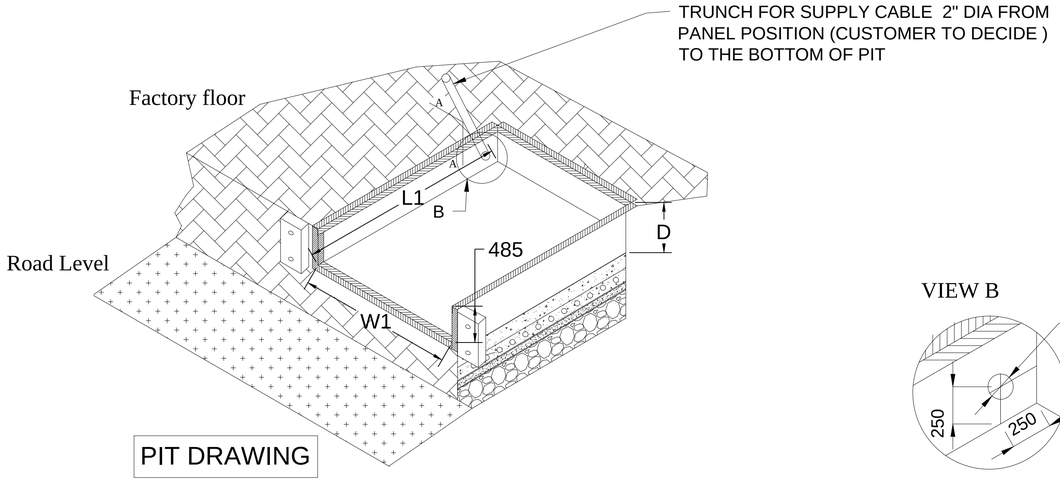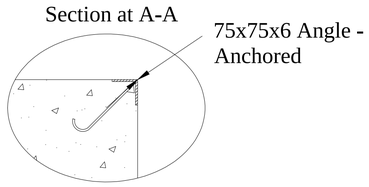



PIT DRAWING




# DOCK LEVELER- 6 TON CAPACITY

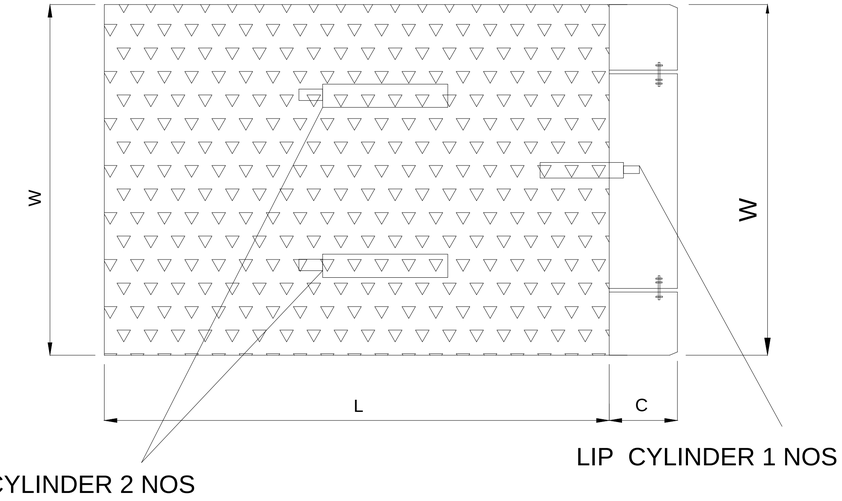NOTE: -

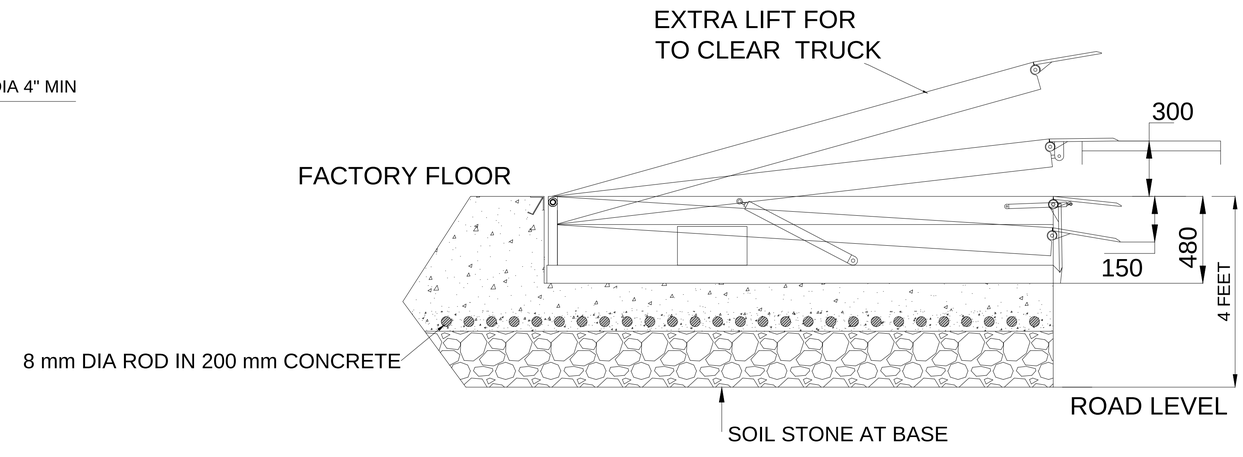1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION ( SUPPLY CABLE LENGTH STD. 7000 MM )
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 10000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING ( IF ORDERED )
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

| CLIENT APPORVAL- | | | NIHVA TECHNOLOGIES PVT. LTD. PUNE |
|---|---|---|---|
| | DATE | SIGN. | NIHVA TECHNOLOGIES PVT. LTD. |
| DRAWN :- OMKAR | 03/07/2017 | | Tel : 020 66304033 |
| CHECKED :- SHEKHAR | 03/07/2017 | | Email:- info@nihva.com |
| APPROVED :- SHEKHAR | 03/07/2017 | | Website:- www.nihva.com |
| ALL DIMENSION ARE IN mm | | | CLIENT - |
| If any queries contact : projects@nihva.com | | | PROJECT - |
| | | | SITE - |
| | | | DWG. NO. - NIHVA/17-18/VDR/0071 |