NIHVA
NIHVA TECHNOLOGIES PVT. LTD.








Creativve Constructiions

Bharat Forge Pune

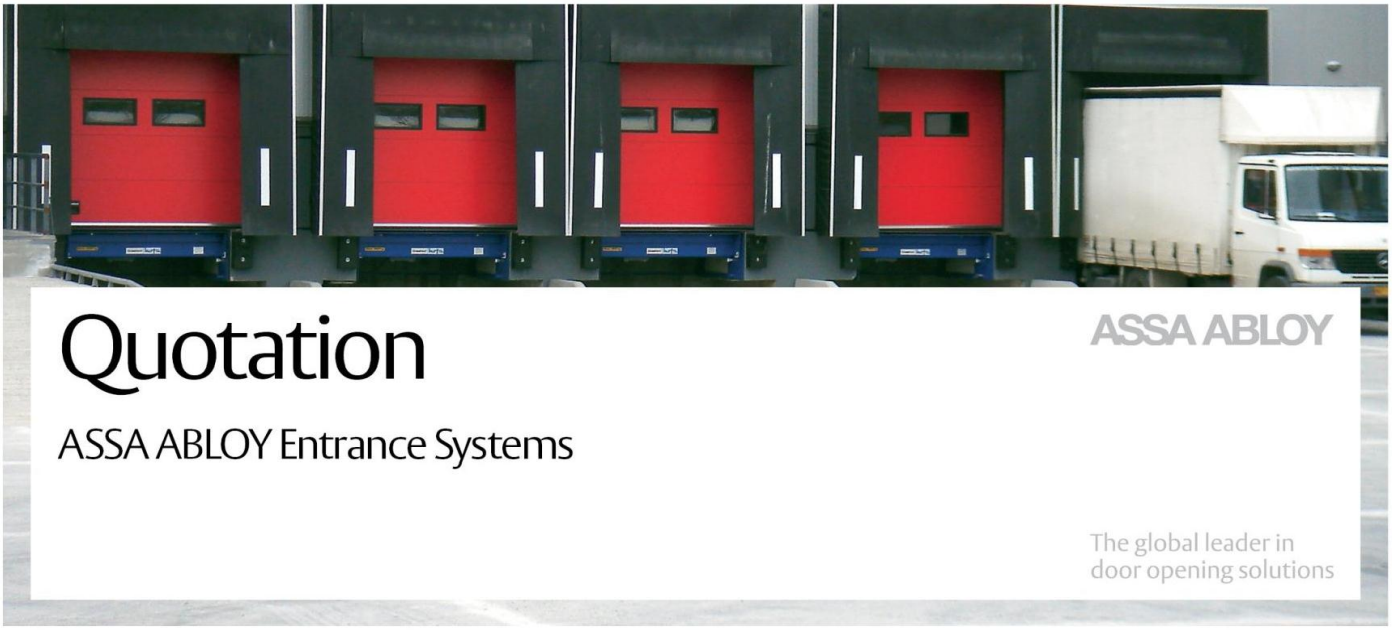

Quotation

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in
door opening solutions

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Sales Quotation

Quotation No. SQT/19-20/1804RC **Date: 28/08/2019**

Creativve Constructiions
Pune

Kind Attn: Ms.Rohini Mane
Email:rohinimane@creativveconstructiions.com
Contact No:9822751214

Project Name and Location: Extra Large Opening Door Requirement at Bharat Forge Pune

Subject: Supply and installation of Extra-Large opening Door System.

Dear Sir,

Thank you for giving us an opportunity to participate with our offer on the above project. We enclose herewith our proposal which includes:

A. Requirement
B. Proposal
C. Terms and Conditions
D. Pricing

By choosing ASSA ABLOY Entrance Systems as the supplier of your door automation products, you will receive the following advantages:

- You are working with a Global Provider with financial strength and over 50 years' experience of the global market place in Entrance Solutions.
- World leading products ensure excellent reliability and life-cycle costs to give you peace of mind.
- Project support for both specification development and design suitability
- A comprehensive product helping to provide value engineered solutions

Major Benefits using ASSA ABLOY (Megadoor)

- No floor track (and therefore no concrete grade beam) needed; a substantial saving in civil cost.
- Faster opening and closing time due to vertical lifting, resulting in a substantial reduction in loss of energy.
- Minimal side-room required (no "door pockets"); a substantial saving in space and cost of land, this is especially relevant, when a series of hangars are built adjacent to each other.
- The doors have very tight sealing, to protect against water, sand and dust ingress, which is essential for a maintenance hangar.

We wish you success with your project and hope that we may be part of your current & future projects as a solution provider. We will follow up this quotation with a call to you within the next few days.

If you have any questions after reading this proposal, or if you need more information, please do not hesitate to contact us.

Kind Regards,
Ms. Varsha
NIHVA Technologies Pvt. Ltd
Mob: +91 8551091333
Email: support@nihva.com

Description: -

The door leaf consists of two sheets of PVC-coated polyester fabric that withstand a temperature of –35 to +70 degrees C. Intermediate horizontal aluminum sections are fitted between the inner and outer fabric.

The door leaf is opened by belt/wire ropes attached to the bottom section, these are wound up onto a hoist unit. The TUV Approved safety arrester will prevent the door from falling in the unlikely event of wire failure. A windlock system is also included to prevent the door from lifting under high wind load conditions.

The door leaf is guided with aluminium side-guides mounted in the doorframe. The door is available in the following standard colors: Red (RAL 3001), Blue (RAL 5005), Grey (RAL 7004), White (RAL 9016), Tan (RAL 1001), Green (RAL 6009) or Translucent White. Other colors are available at an extra cost.

The door is operated via a touch screen control panel which includes visual indication of the door status and fault diagnosis indication plus Service history data. The enclosure of the control cabinet meets the specifications of protection class IP65, Push buttons IP65 and Gear motor IP55.

Electrical cables as per EN regulations. Cable tray and/or conduit is excluded.

Commercial Offer: -

Supply of VL3190 Extra Large Opening door

Sr No.	Clear Size in mm	Qty (in NO)	Supply & Installation Price in INR including custom duty and clearance
1	(W) 9000 mm X (H) 12000 mm	1	16,90,500

I. Preliminary schedule

The schedule below is preliminary. The schedule times will change subject to the final choice of door design. Critical milestones are receipt of the LPO, receipt of the advance payment, final approval of shop drawings, and successful load test of the building and overall site readiness for the door installation.

Placement of Order and Order Clarification	Week 1
Fast track approval letter (Optional)	Week 1
Supply of Shop Drawings	Week 2
Detailed Design	Week 4
Completion of Component Production	Week 15
Shipment ex works	Week 15
Sea freight	Week 16
Delivery of Goods at CIF Mumbai	Week 21

Installation time is subject to site readiness, clear working area and delays by others. Detailed program will be agreed with our project coordinator.

II. Delivery conditions

Delivery of material will be coordinated with the client written construction schedule. The contractor is responsible for notification to Megadoor of any expected or actual delays in the agreed delivery date at least fourteen (14) days prior to the scheduled delivery. Without timely notification of changes in delivery dates, the contractor or contractor's representative will assume the responsibility of unloading and storing the provided materials in a manner to prevent damage of the materials.

III. Drawings

We will issue a full set of shop drawings for approval within 2 weeks of receiving the confirmed order and finalized design details

IV. Compensation clause

Please note that in the event the buyer cancels an order, after the order is confirmed to us, it is binding to the buyer to pay NIHVA - ASSAABLOY a compensation of 25% of order value.

General Pre-Requisites Required at Site

Prerequisites:

1. Finished Flooring after curing (Without Water)
2. Electrical Supply on the site single phase/three phase points at different places.
3. Provide electrical cables near to the installation machinery.

Limit of Supply

1. Provide place to store the material to be installed.
2. Be responsible for the safe custody of all material.
3. Provide place to safely store all the tools of installation.
4. Provide change & rest room for the workers.

The supply included only those mentioned in the quote & does not include below:

Client Scope

1. Once our project gets complete for any additional work to & fro loading &boarding of our service Technicians is in client scope
2. Any civil / masonry/structural work required to support are in client scope.

Terms & Conditions:

Payment	80 % advance along with Purchase order & balance before dispatch
P & F Charges	@ 3 % of Total Supply Value
Transport	Extra at actual
Tax	GST @18%
Validity	15 days from the date of offer
Delivery	Within 21 - 22 weeks from the date of receipt of confirmed order, drawing approval.
Insurance	Inclusive
Warranty	12 months from date of Supply
Client scope	➢ Once our project gets completed; for any additional work to & fro, lodging & boarding of our service technicians is in client scope. ➢ Any masonry / structural work required to support are in client scope
Compensation clause	Please note that in the event the buyer cancels an order, after the order is confirmed to us, it is binding to the buyer to pay NIHVA - ASSAABLOY a compensation of 25% of order value.
Others	Need to provide by client - clear opening mounting structures, any Civil work, electrical points and cables till doors, suitable safe Lifting Equipment's and Scissor lifts, Material and equipment storage secured space, fabrication and assembly space.

General conditions of Aircraft Hangar Door

1. Continuous uninterrupted access to any single door section or as agreed separately.

2. Suitable structure for installing the doors to be provided. Door Structure to be done as per the interface and load diagram that will be provided by us after the order confirmation.

3. Load testing of the steel structure to be done by the steel contractor after completion of structure. Report to be shared with our project manager for verification.

4. A clear floor area of 4 meters each side of the door leaf must be available during the curtain fitting process. The floor should be finished or if this is not possible, adequate temporary protection be made available to prevent damage to the curtain material.

5. 400 volt / 50Hz 3 phase isolator to be fitted to within 1 meter of the door main control panel. If not available at the start of installation, a temporary supply is acceptable. Any return visits to commission the doors due to permanent power not being available will be charged as appropriate.

6. Provision of 230 Volt power supply (by others) for hand tools.

7. A dry and secure area, not in direct sunlight, is to be provided for storage of the door components.

8. Access to site between 7 am to 6 pm six days per week. If this is not possible the installation programme may require amending.

9. Any storage costs for materials due to delays outside of Mega door's control will be charged to the main contractor.

10. The project time indicated does not take into account adverse weather conditions that may prevent safe and efficient working practices. We reserve the right to extend the period accordingly.

11. Any passes required for the project, are the responsibility of the Customer and Contractor and must be available, before commencement of the installation. Any delays caused by the non-availability of passes, will be charged accordingly.

Inclusions

1. Our proposal includes **sea freight from Sweden to Site and installation of the door leaf, guide rails, weather seals, motors, control panel and electrical wiring.** (Please refer Exclusion)

2. A pre-installation inspection will be carried out, by our Project Manager, before our installers travel to site, so as to verify that the structural steelwork and electrical installation are as per our requirements. Our Project Manager will also check that the installation equipment and facilities are ready for installers.

3. Please note that the control panels, motors and electrical wiring are in full compliance with Swedish regulations and specifications, any variations due to specific requirements for India must be notified to us at the time of ordering and may be subject to an increase in the price. Any variations notified to us, after material procurement, will be charged accordingly and may lead to production delays.

Exclusions

The following items are not within our scope of works and are to be provided by others at no cost to NIHVA - ASSAABLOY.

1. The structural support steel for Door Mounting will be in client scope.

2. Any passes required for the project, are the responsibility of the Contractor and must be available, before commencement of the installation. Any delays caused by the non-availability of passes, will be charged accordingly.

3. Any Civil work is in client scope.

4. Conduits and Cable trays from the control panel locations to the door distribution boxes.

5. A 400/230 power supply (permanent or temporary) must be provided (FOC) by the main Contractor during the installation of the door for power tools and testing of the door sections during erection.

6. A safe storage / pre-assembly area for the door materials (by main contractor).

Please feel free to Contact Mr. Arjun Patil on 08551096333 For any further Clarification / Information in this concern.

With Best Regards
Varsha
8551091333

ASSA ABLOY Entrance Systems

One partner for all your automatic entrances

ASSA ABLOY Entrance Systems comprise world-leading products, maintenance programs and modernization services, ensuring total solutions for efficient flow of people, goods and vehicles. With comprehensive entrance solutions for the front, back and interior of your building, we put every automatic door equipment or service you need under one roof.

The perfect match for your building
ASSA ABLOY Entrance Systems' extensive product range, expert application knowledge and maintenance programs provide optimal entrance solutions for all needs and any demands in manufacturing, distribution & logistics, retail, healthcare, transportation, hospitality, private services, public services, mining and air & sea, and more.

Sustainable Solutions
We design, manufacture and service automatic entrance solutions that help you reach your sustainability goals for energy savings and minimal environmental impact.

Leading product brands backed by dedicated specialists
With our three specialized business areas; Pedestrian Door Solutions, Industrial Door & Docking Solutions and High-Performance Door Solutions, we offer market-leading product brands and a global service organization. With more than a century of aggregated engineering experience and application expertise ASSA ABLOY Entrance Systems is your ideal business partner to provide, maintain and modernize all of your automatic entrances.



Pedestrian Door Solutions

- swing doors
- sliding doors
- revolving doors



Industrial Door and Docking Solutions

- industrial doors
- complete docking systems
- hangar doors



High-Performance Door Solutions

- high speed roll doors
- doors for special applications such as clean rooms, machine protection and food processing