


PROPOSED SITE PLAN

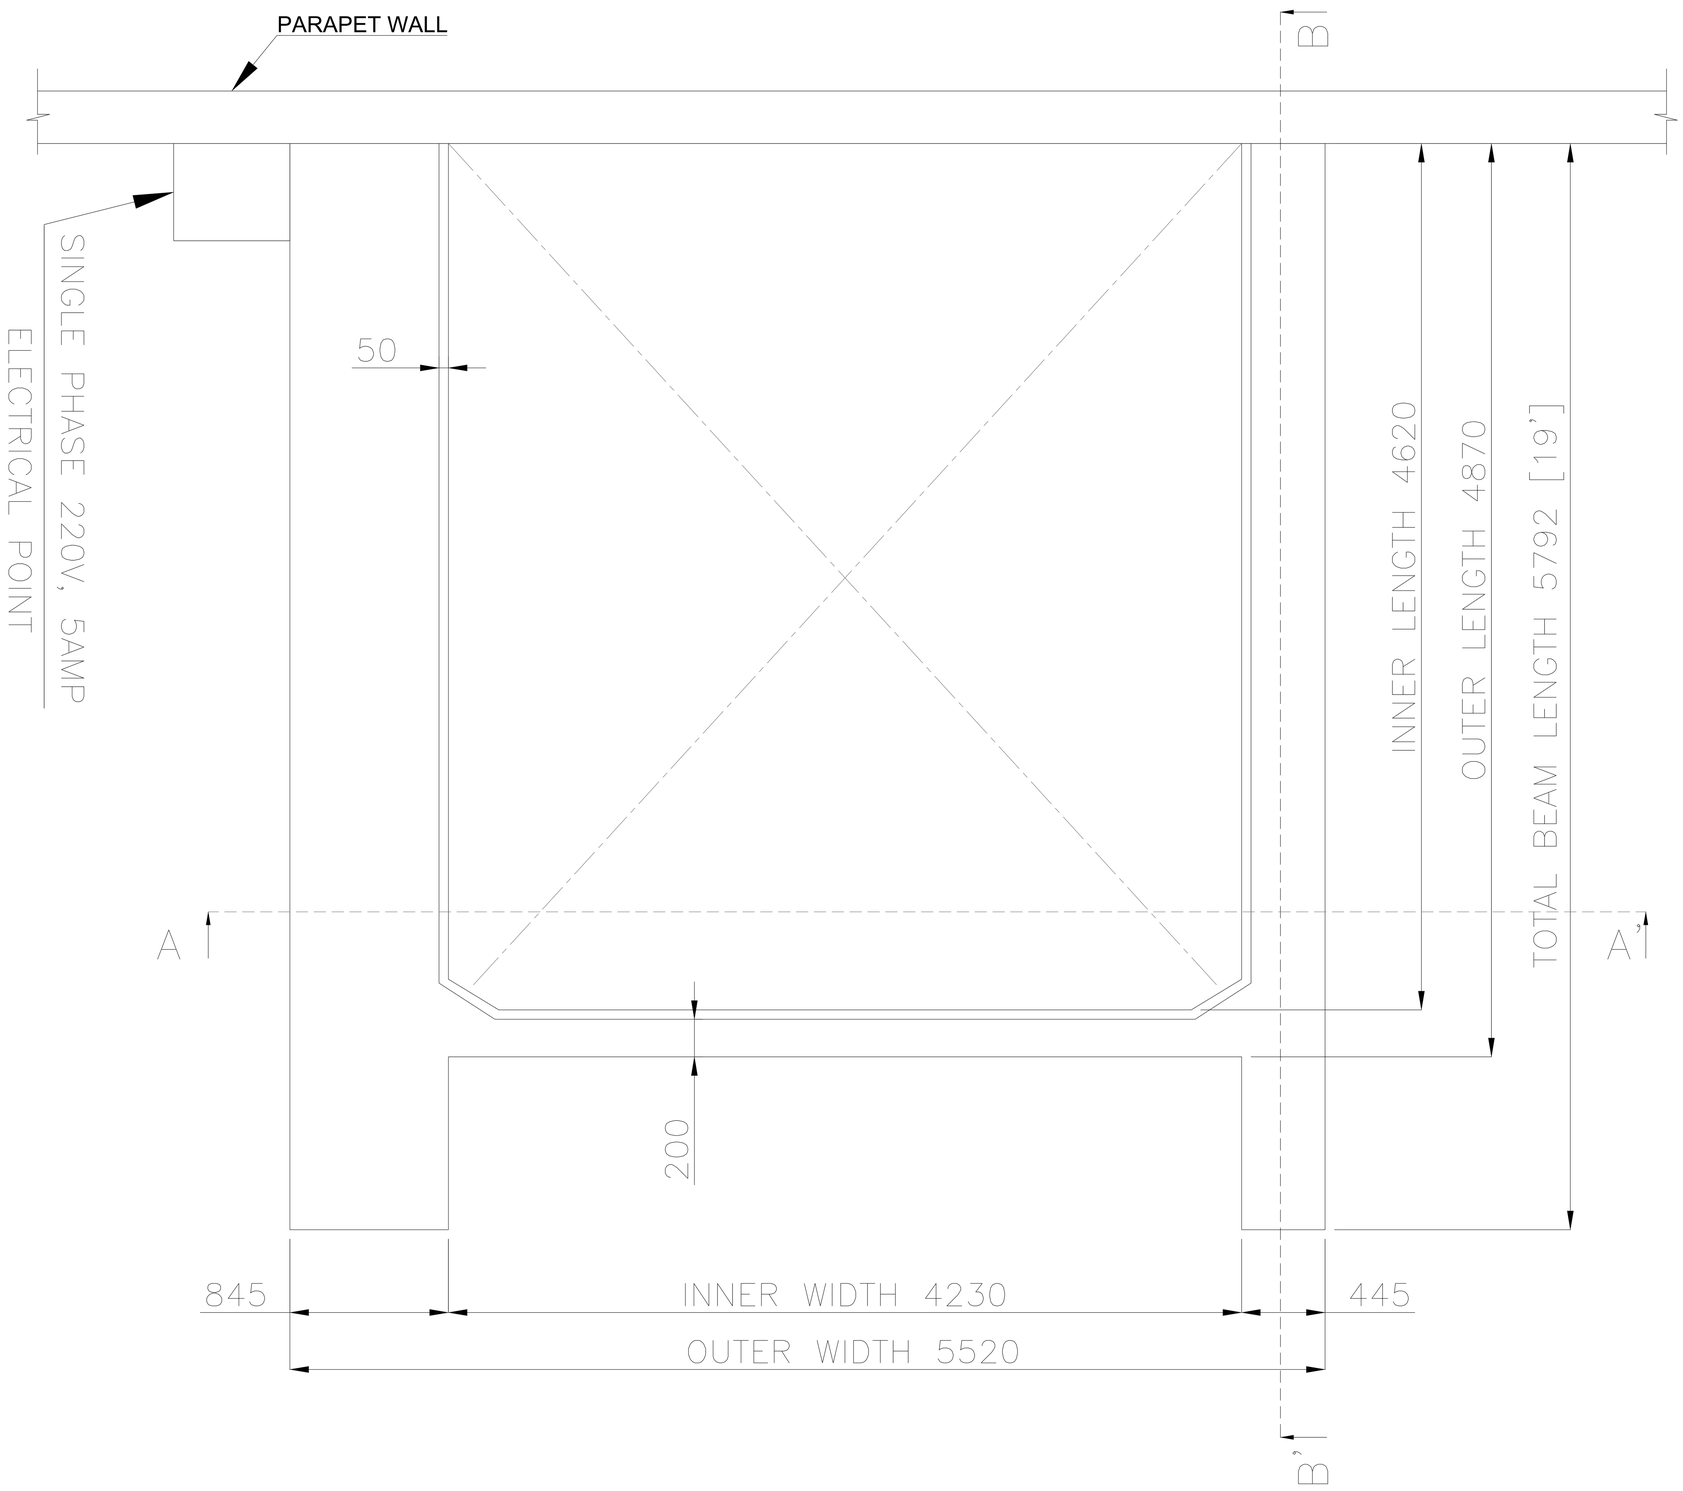

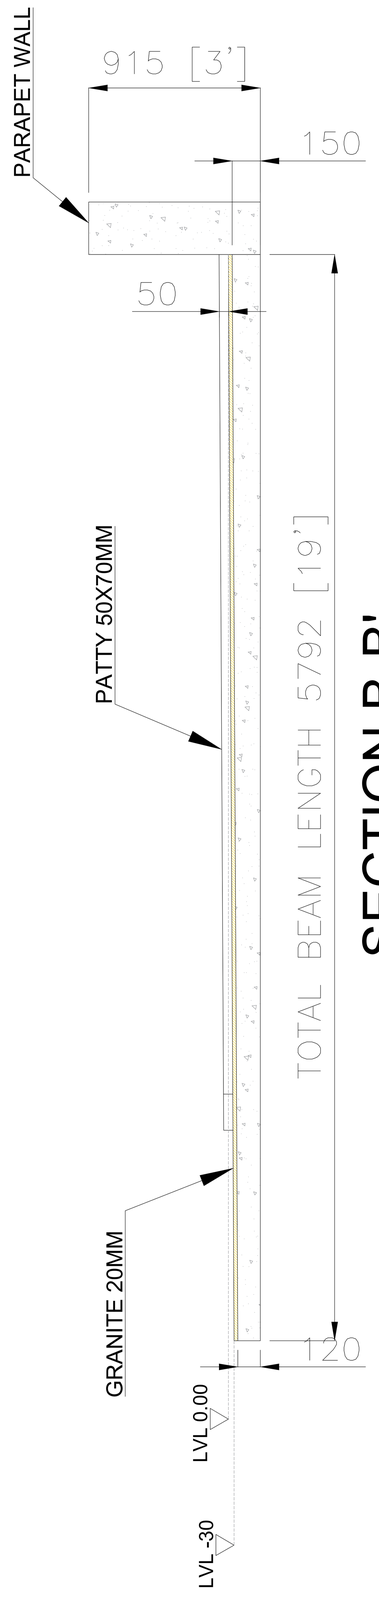

SECTION B-B'

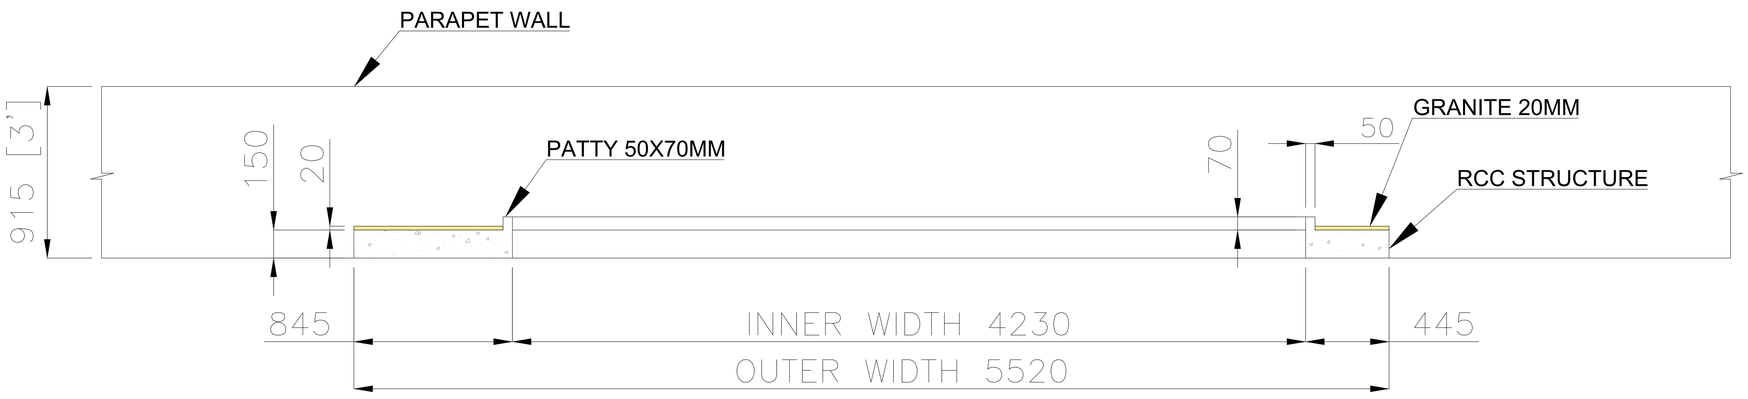

SECTION A-A'

1. CONCRETE BEAM OF GIVEN DIMENSION 445X150MM ON ONE SIDE FOR TRACK MOUNTING AND 845X150MM ON OTHER SIDE FOR MOTOR MOUNTING TO BE PROVIDED.
2. CONCRETE PATTY OF GIVEN DIMENSION 70X50 TO BE PROVIDED AS A SINGLE STRUCTURE WITH CONCRETE BEAM ALL ROUND THE CUTOUT TO AVOID WATER FLOW INSIDE.
3. ALL JOINTS SHOULD BE LEAK PROOF.
4. POLISHED GRANITE 20mm TO BE PROVIDED ON TOP OF THE CONCRETE BEAM TO MAINTAIN SPIRIT LEVEL ALL AROUND THE CUT OUT.
5. SLOPE GRADIENT 30 MM TO BE MAINTAINED AS MENTIONED ABOVE.
6. SMOOTH FINISH HAS TO BE MAINTAINED ON TOP FOR TRACK MOUNTING.
7. ELECTRICAL POINT SINGLE PHASE 220V, 5AMP TO BE PROVIDED

ALL THE ABOVE MENTIONED WORK IS NOT UNDER OUR SCOPE.
ALL DIMENSION ARE IN mm.

Index	Date	Name	Designation	Sheet	Scale
Drawn	01/03/21	RAGHU	PROPOSED SITE PLAN	A	NTS
Chkd	01/03/21	PURUSH			

Customer Drg.No.

KISHANGARH VILLA (V3)

MEGAVENT TECHNOLOGIES