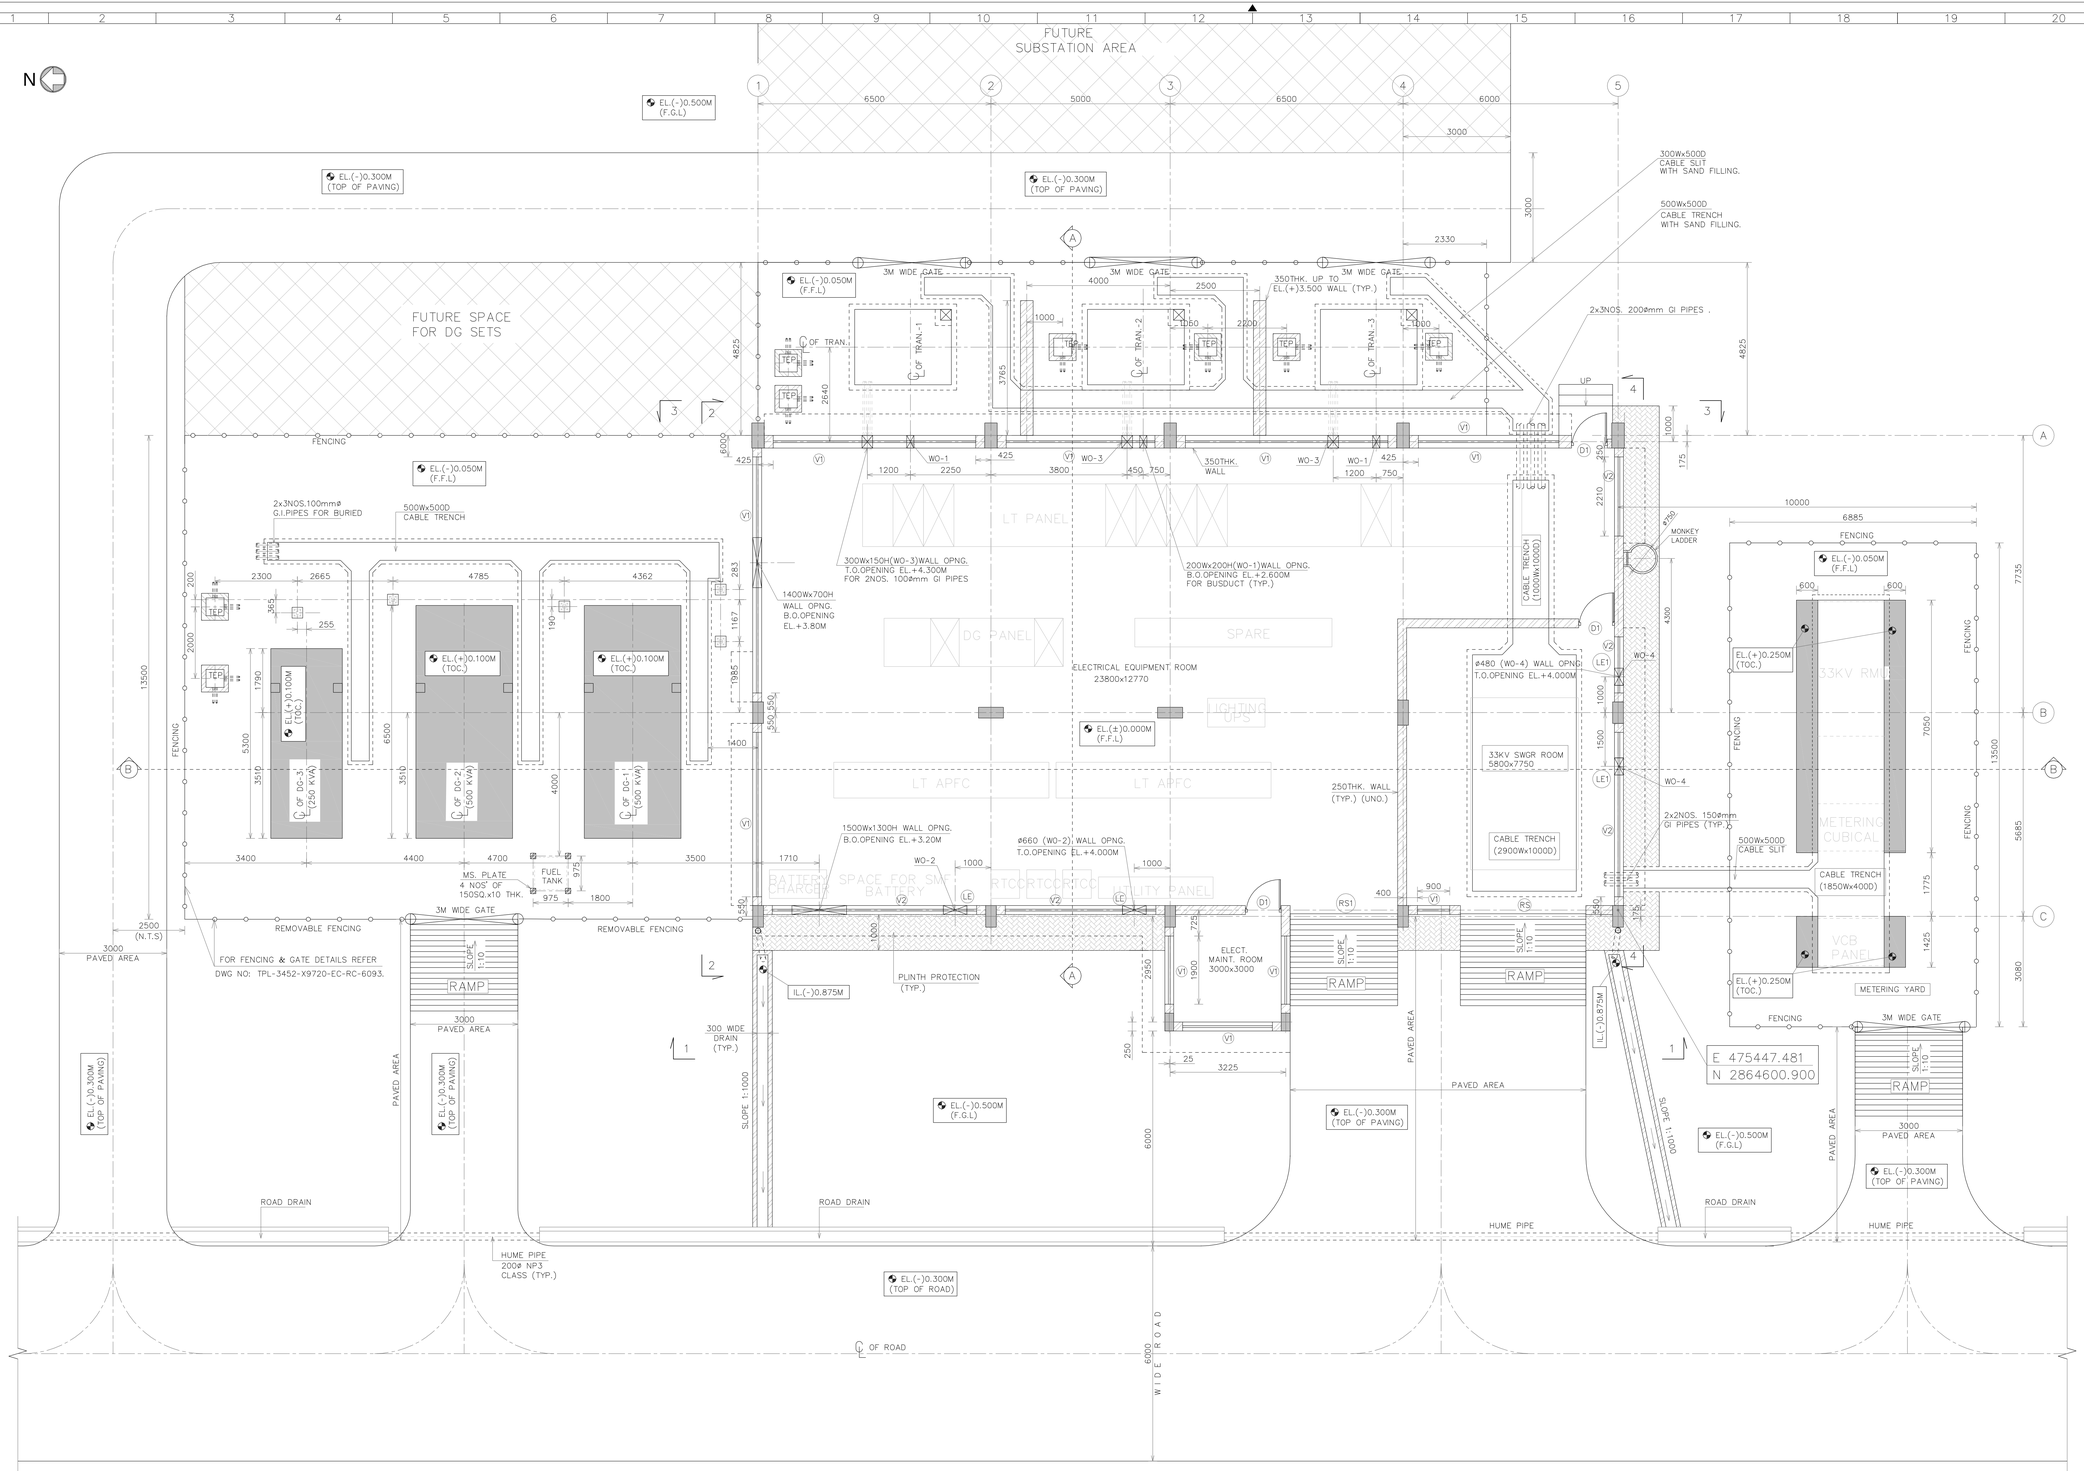
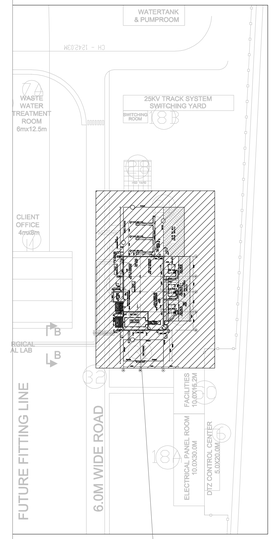



## GROUND FLOOR PLAN
1: 50

## SCHEDULE OF OPENINGS:

| S.NO | DESCRIPTION | MARKING | OPENING SIZE WIDTH | OPENING SIZE HEIGHT | MATERIAL | NO'S |
|---|---|---|---|---|---|---|
| 1 | DOOR | D1 | 1000 | 2100 | POWDER COATED ALUMINUM FRAMES FOR DOORS WITH DOOR HANDLES, HINGES, DOOR CLOSURES AND LOCKING SYSTEM. THE BOTTOM PANEL SHALL BE WITH NOVAPAN BOARD 12MM THICK LAMINATED AND TOP PANEL WITH 6MM THK FILTERED GLASS. SINGLE LEAF FIRE RESISTANT DOOR (2 HRS RATING) | 3 |
| 2 | ROLLING SHUTTER | RS | 3500 | 3000 | ROLLING SHUTTER (PARTLY LATHED & PARTLY GRILLED) MECHANICALLY OPERATED | 1 |
| 3 | ROLLING SHUTTER | RS1 | 3000 | 3000 | | 1 |
| 4 | EXHAUST FAN | LE | ø660 | | EXHAUST FAN | 2 |
| | | LE1 | ø480 | | | 2 |
| 5 | VENTILATOR | V1 | REF. PLAN | 600 | ALUMINIUM POWDER COATED VENTILATORS | 10 |
| | | V2 | REF. PLAN | 600 | ALUMINIUM POWDER COATED VENTILATORS WITH FIXED GLASS | 5 |

## SCHEDULE OF EXTERNAL FINISHES

| | |
|---|---|
| ROOFING | ROOF TERRACE IS PROVIDED WITH BRICKBAT COBA OR APPROVED EQUIVALENT |
| WALLS | 250THK EXTERNAL BRICK WALLS, OVERALL 18MM THK CEMENT MORTAR PLASTERING WITH AN UNDER LAYER OF 12MM THK IN CM 1:5 AND TOP LAYER OF 6MM THK IN CM 1:5 WITH WEATHER SHIELD PAINT. |
| RWP | 150 mm ø PVC DOWN TAKE PIPES |

## AREA STATEMENT:

1. GROUND FLOOR - 335.60 Sq.m

## FINISHING SCHDULE

| | |
|---|---|
| **FLOORING** | |
| GROUND FLOOR AREA | VDF FLOORING |
| **WALLS** | |
| INTERNAL WALL & PLASTERING | INTERNAL 125MM THICK BRICK WALL & 15 MM THICK PLASTER WITH SMOOTH FINISH UP TO 3M HEIGHT AND WALL CARE PUTTY |
| EXTERNAL WALL & PLASTERING | EXTERNAL 250MM THICK BRICK WALL & 18 MM THICK PLASTER WITH SPONZE FINISH |
| **ROOFING** | |
| INTERNAL FINISHING | PLASTERING WITH CM (1:6) AND PAINTING |
| WATER PROOFING | BRICKBAT COBA WATER PROOFING OR APPROVED EQUIVALENT |
| RWP | 150 mm ø PVC DOWN TAKE PIPES |
| **PAINTING** | |
| EXTERNAL FINISHING | TWO COATS OF WEATHER SHIELD PAINT OF BERGER MAKE OR APPROVED EQUIVALENT |
| INTERNAL FINISHING | TWO COATS OF PLASTIC ACRYLIC EMULSION OVER A COAT OF PRIMER |
| COLOR | AS PER OWNER RECOMMENDATION |
| **CHAIN LINK FENCE** | |
| FENCING | GI COATED CHAIN LINK FENCE, 75mm MESH(2.5mm THK.) |

## SPECIAL NOTES:
COORDINATES TO BE VERIFIED BEFORE SITE CONSTRUCTION.

## NOTES
1. ALL DIMENSIONS ARE IN MILLIMETRES AND LEVELS ARE IN METRES, UNO.
2. EL(±)0.000 REFERS TO FINISHED FLOOR LEVEL WHICH CORRESPONDS TO RL 44.30
3. THICKNESS OF ALL THE WALLS SHOWN IN THE DRAWING SHALL BE 250MM IN CM(1:6)
4. ALL DIMENSIONS OF MASONRY WALL, COLUMNS, BEAMS WALL THICKNESS, DOOR/WINDOW/VENTILATOR/ROLLING SHUTTER OR ANY OTHER OPENINGS, ARE SHOWN EXCLUSIVE OF PLASTER,FINISHING OR FRAMES.
5. WATER PROOFING AND HEAT INSULATION OF ROOFS.
6. CLOSURE OF OPENINGS AFTER FAN INSTALLATION TO BE DONE BY CIVIL CONTRACTOR.
7. STANDARD DETAIL DRAWING - TPL-3452-X9690-EC-AC-6400.

## LEGEND
℄ : CENTER LINE
TOC : TOP OF CONCRETE
EL : ELEVATION
FFL : FINISHED FLOOR LEVEL
FGL : FINISHED GROUND LEVEL
TYP : TYPICAL

## REFERENCE
1. FOR RC DETAILS OF FOUNDATION & COLUMNS REFER DWG NO: TPL-3452-X9720-EC-RC-6090.
2. FOR RC DETAILS OF GRADE SLAB & PLINTH BEAMS REFER DWG NO: TPL-3452-X9720-EC-RC-6091 & 6092.
3. FOR FENCING & GATE DETAILS REFER DWG NO: TPL-3452-X9720-EC-RC-6093.
4. FOR RC DETAILS OF TIE BEAMS, ROOF BEAM & SLAB REFER DWG NO: TPL-3452-X9720-EC-RC-6094.
5. FOR SECTIONS & ELEVATION DETAILS REFER DWG NO: TPL-3452-X9720-EC-AC-6236 (Sht 2 of 2)

## ENGG. REFERENCE
1. ELECTRICAL EQUIPMENT GA FOR FACTORY SUBSTATION --- TPL-340052-X7274-EE-GA-2100.

| REV.NO. | DATE | REVISION | CIVIL | MECH | ELEC | INST | APPD | DRAWN |
|---|---|---|---|---|---|---|---|---|
| | | | CLEARED | | | | | |
| 2 | 07.01.17 | ISSUED FOR APPROVAL | | | | | AS | GMN |
| 1 | 03.01.17 | ISSUED FOR APPROVAL | | | | | AS | GMN |
| 0 | 05.12.16 | ISSUED FOR APPROVAL | | | | | AS | GMN |

THIS DRAWING IS PROPERTY OF **"TATA PROJECTS LIMITED"** MUST NOT BE PASSED ON TO ANY PERSON OR BODY NOT AUTHORIZED BY US TO RECEIVE IT NOR BE COPIED OR OTHERWISE MADE USE EITHER IN FULL OR IN PART BY SUCH PERSON OR BODY WITHOUT OUR PRIOR PERMISSION IN WRITING.

EPC CONTRACTOR
TATA PROJECTS LIMITED
H. NO.1-7-80 TO 87, "MITHONA TOWERS - 1" PRENDERGHAST ROAD, SECUNDERABAD - 500003.

PROJECT TITLE
PLANT FACILITY FOR MADHEPURA ELECTRIC LOCOMOTIVE PRIVATE LIMITED
AT MADHEPURA, BIHAR.

OWNER
MADHEPURA ELECTRIC LOCOMOTIVE PRIVATE LIMITED

OWNER A/E CONSULTANT :
SEMAC CONSULTANTS PVT LTD
6-1-276, 2ND FLOOR, ARCHANA BLOCK, CONJEEVARAM HOUSE, PADMARAO NAGAR SECUNDERABAD - 500025.

| | SIGNATURE | DATE |
|---|---|---|
| DRAWN | GMN | 05.12.16 |
| DESIGNED | SR | 05.12.16 |
| CHECKED | AS | 05.12.16 |
| DEPT.HEAD | AS | 05.12.16 |

RELEASED FOR: INFORMATION, APPROVAL, ENGINEERING, CONSTRUCTION (✓)

DWG. TITLE:
FACTORY AREA
ELECTRICAL SUBSTATION BUILDING
ARCHITECTURAL PLANS

DEPT. CIVIL | JOB NO. 0000 | SCALE: - | SHEET: 1 OF 2 | SIZE : A0
FILE NAME. ALSTOM-M-AR-STF-101 | REV./ISSUE
DWG.NO. TPL-3452-X9720-EC-AC-6236 | R2