
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

LOCATION GRID A12 - A13(OXIDE COLLECTION)

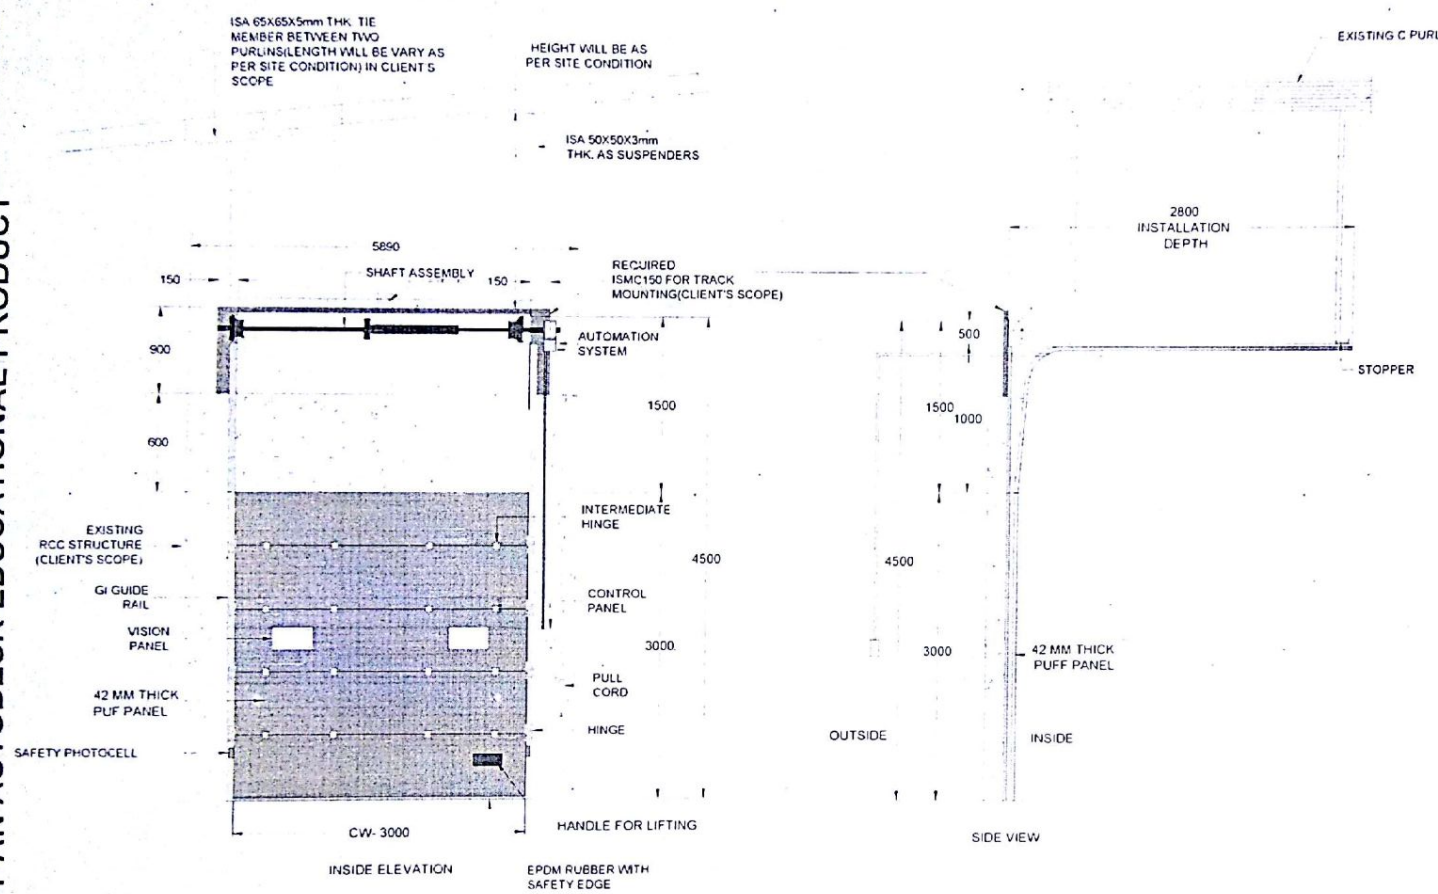

DIMENSION		
CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
3000 mm	3000 mm	1

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm DEN. FREE PCI YURETHANE WITH 0.5mm THK. GI PRECOATED PANELS
DOOR HINGE	———	HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		ENAMEL PAINT WITH APPROVED SHADE RAL 5012 LIGHT BLUE

ACCESSORIES
1. SAFETY PHOTOCELL 1 PAIR DOOR
2. FLASH LIGHT 2 SIDE OF DOOR
3. PULL CORD SWITCH 1 INSIDE SIDE

IMPORTANT NOTES

1. REQUIRED STRUCTURE FOR DOOR SHALL BE IN CLIENT'S SCOPE.
2. SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
3. ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

NIHVA
NIHVA TECHNOLOGIES PVT LTD
NIHVA TECHNOLOGIES PVT LTD PUNE
Email - info@nihva.com
Website - www.nihva.com

TITLE

SECTIONAL DOOR HL 2 (MOTORIZED)

CLIENT'S APPROVAL

CLIENT - SCON PROJECTS

PROJECT - BEKAERT INDUSTRIES PVT.LTD.

SITE LOCATION - RANJANGAON, MIDC

DWG. NO. NIHVA/17-18/0143

SCALE NTS	WT:	SHEET 1 OF 1
DRAWN BY OMKAR	DATE 05-08-2017	
CHECK BY SHEKHAR	DATE 05-08-2017	
APPROVED BY SHEKHAR	DATE 05-08-2017	

If any queries contact projects@nihva.com


NOTE ALL DIMENSIONS ARE IN mm

24/08/2017


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
Scanned by CamScanner

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT


LOCATION - B16-17 (CHARGING ROOM)

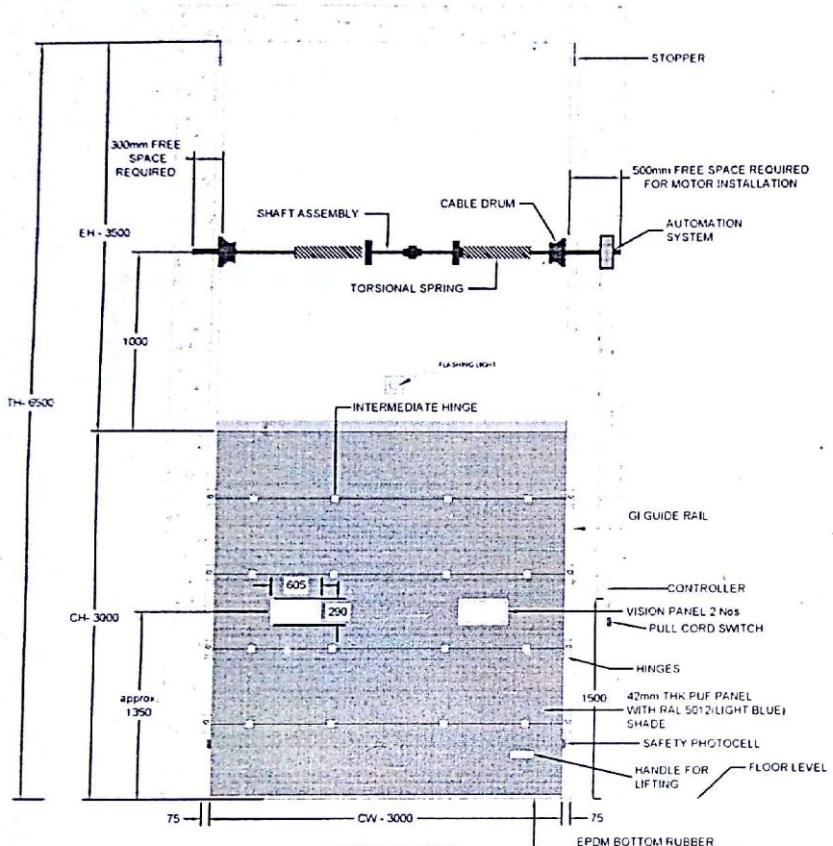


INSIDE ELEVATION

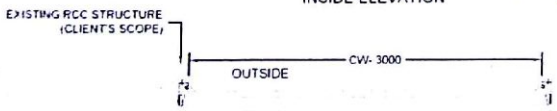

PLAN

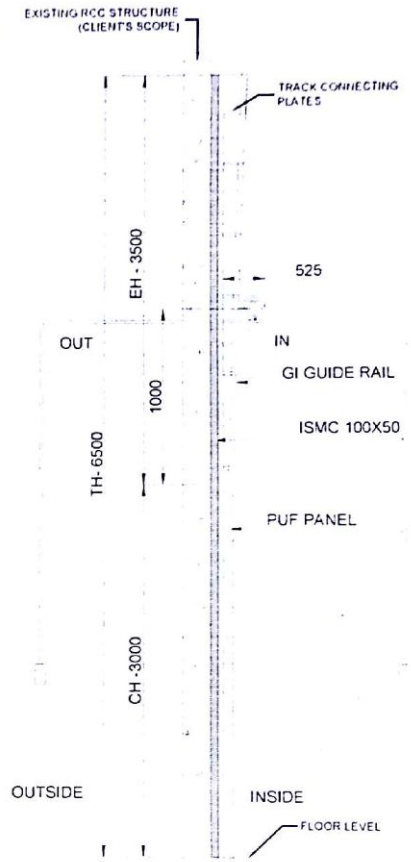

SIDE VIEW

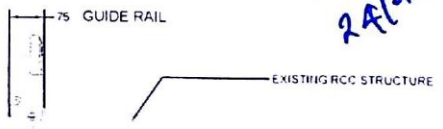

TRACK DETAILS

SR NO	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY	EH	TH	LOCATION
1	3000	3000	1	600	6600	

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
3000 mm	3000 mm	1

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm THK PUF PANEL WITH 0.5mm THK GI PRE-PAINTED PANELS
DOOR HINGE	———	HEAVY DUTY HINGES FOR BOTH SIDES OF PANELS
SHAFT ASSEMBLY	STD	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		ENAMEL PAINT WITH APPROVED SHADE RAL 5012 LIGHT BLUE

ACCESSORIES-
1. SAFETY PHOTOCELL- 1 PAIR /DOOR
2. FLASH LIGHT- 2 SIDE OF DOOR
3. PULL CORD SWITCH- 1 SINGLE SIDE

IMPORTANT NOTES:

1. REQUIRED STRUCTURE FOR DOOR SHALL BE IN CLIENT'S SCOPE.
2. SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
3. ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

NIHVA
NIHVA TECHNOLOGIES PVT LTD

NIHVA TECHNOLOGIES PVT LTD PUNE
Email - info@nihva.com
Website - www.nihva.com

TITLE:

SECTIONAL DOOR VL (MOTORIZED)

CLIENT'S APPROVAL :

CLIENT - SCON PROJECTS

PROJECT - BEKAERT INDUSTRIES PVT LTD.

SITE LOCATION - RANJANGAON, MIDC

DWG. NO. NIHVA/17-18/0141

SCALE NTS	WT	SHEET 1 OF 1
DRAWN BY OMKAR		DATE 05-08-2017
CHECK BY SHEKHAR		DATE 05-08-2017
APPROVED BY SHEKHAR		DATE 05-08-2017

If any queries contact projects@nihva.com

NOTE ALL DIMENSIONS ARE IN mm


24/08/2017


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT


Scanned by CamScanner


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

LOCATION GRID D18-E18 & E18-F18

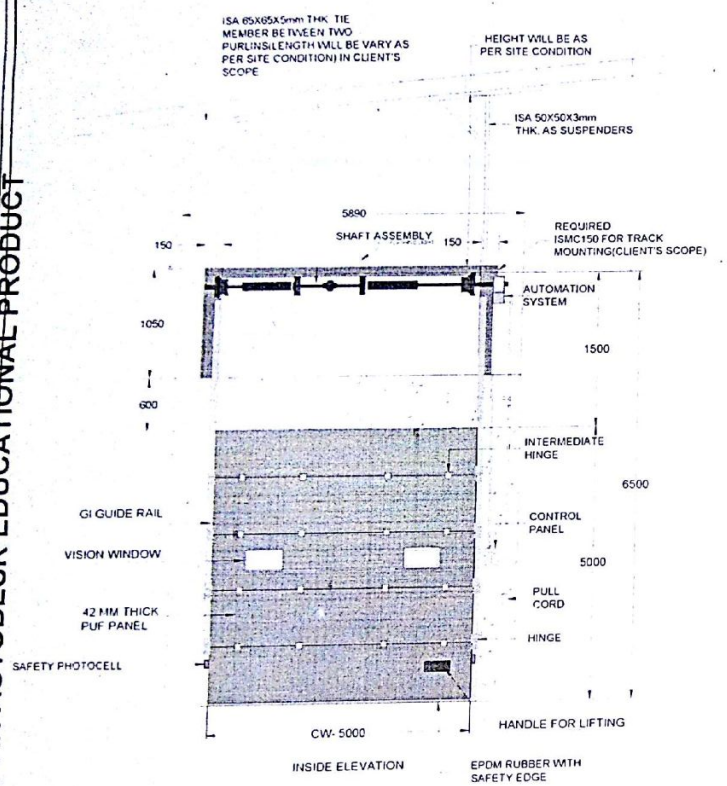

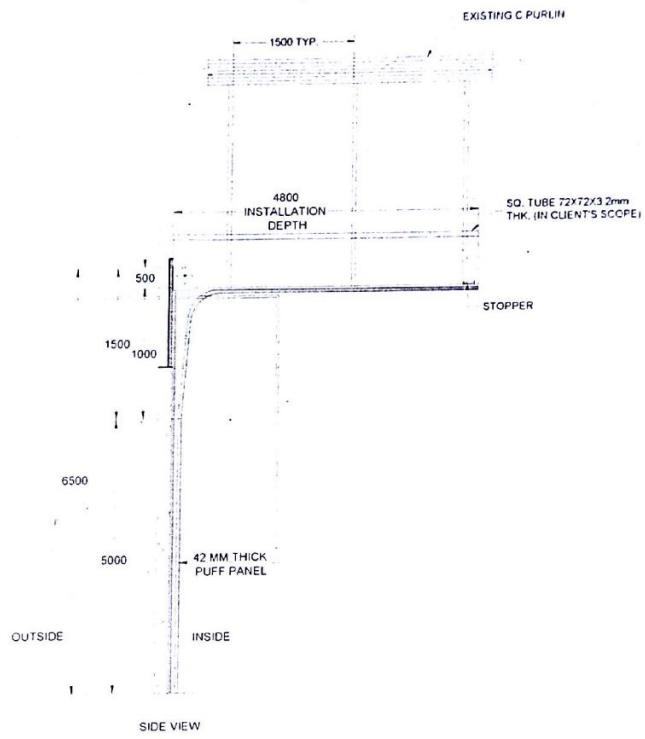

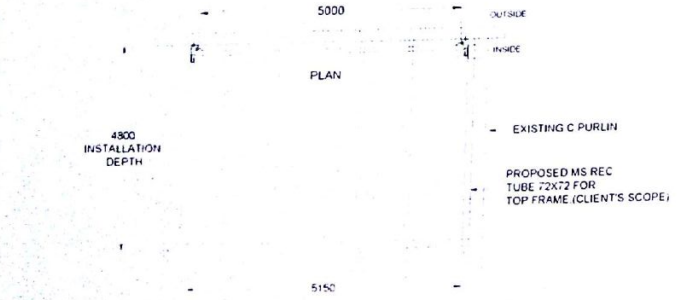

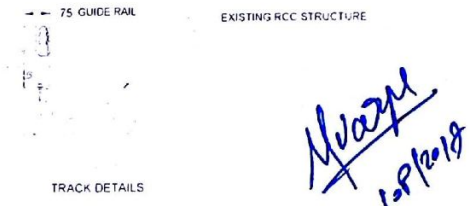

Mayur
24-8-2018

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
5000 mm	5000 mm	2

TECHNICAL DATA

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm CFC- FREE POLYURETHANE WITH 0.5mm THK. GI PRE-COATED PANELS
DOOR HINGE	———	HEAVY DUTY HINGES FOR INTERLOCKED PANELS
SHAFT ASSEMBLY	STD	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		ENAMEL PAINT WITH APPROVED SHADE RAL 5012 LIGHT BLUE

ACCESSORIES:
1. SAFETY PHOTOCELL- 1 PAIR /DOOR
2. FLASH LIGHT- 2 SIDE OF DOOR
3. PULL CORD SWITCH- 1 SINGLE SIDE

IMPORTANT NOTES :

1. REQUIRED STRUCTURE FOR DOOR SHALL BE IN CLIENT'S SCOPE.
2. SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
3. ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email - info@nihva.com
Website - www.nihva.com

TITLE:

SECTIONAL DOOR HL 1 (MOTORIZED)

CLIENT'S APPROVAL :

CLIENT - SCON PROJECTS

PROJECT - BEKAERT INDUSTRIES PVT.LTD.

SITE LOCATION - RANJANGAON, MIDC

DWG. NO. NIHVA/17-18/0142

SCALE NTS	WT:	SHEET 1 OF 1
DRAWN BY OMKAR	DATE 05-08-2017	
CHECK BY SHEKHAR	DATE 05-08-2017	
APPROVED BY SHEKHAR	DATE 05-08-2017	

If any queries contact projects@nihva.com


NOTE ALL DIMENSIONS ARE IN mm


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

Scanned by CamScanner

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

DOOR LOCATION - GRID V30- V31 & GRID V44 -V45

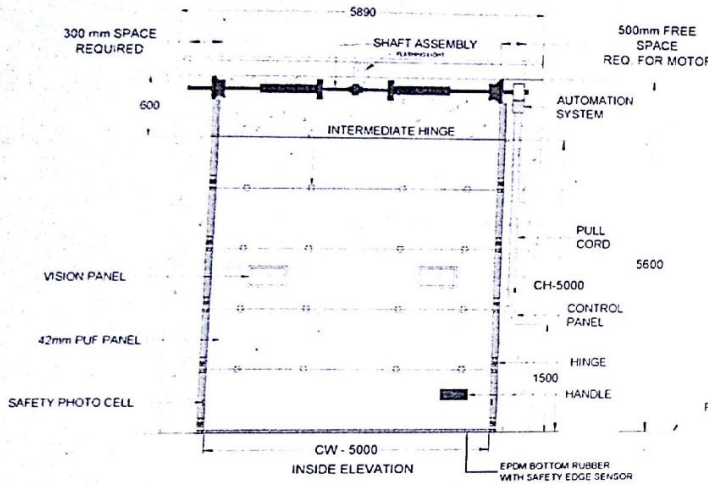

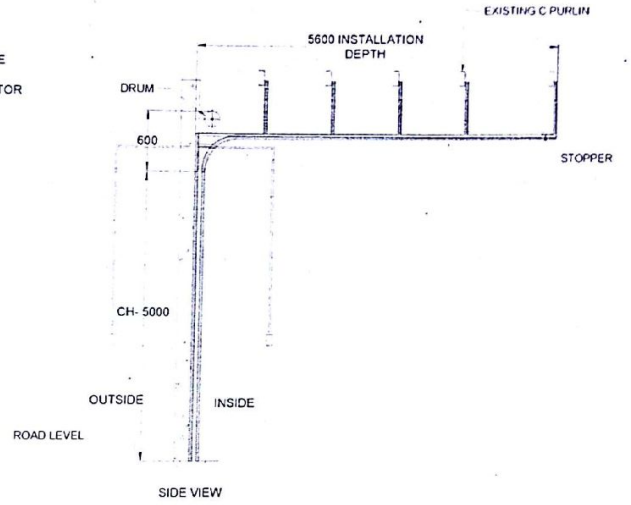





5600 INSTALLATION DEPTH

5000

DIMENSION :		
CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
5000 mm	5000 mm	2

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm CFC, FREE FROM ASBESTOS PANELS
DOOR HINGE	———	HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		ENAMEL PAINT WITH APPROVED SHADE RAL 5012 LIGHT BLUE

ACCESSORIES:
1. SAFETY PHOTOCELL - 1 PAIR /DOOR
2. FLASH LIGHT - 2 SIDE OF DOOR
3. PULL CORD SWITCH - 1 SINGLE SIDE

IMPORTANT NOTES

1. REQUIRED STRUCTURE FOR DOOR SHALL BE IN CLIENT'S SCOPE.
2. SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
3. ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT LTD PUNE
Email - info@nihva.com
Website - www.nihva.com

TITLE:

SECTIONAL DOOR SL 2 (MOTORIZED)

CLIENT'S APPROVAL :

CLIENT - SCON PROJECTS

PROJECT - BEKAERT INDUSTRIES PVT LTD.

SITE LOCATION - RANJANGAON MIDC

DWG NO. NIHVA/17-18/0140

SCALE NTS	WT.	SHEET : OF 1
DRAWN BY OMKAR	DATE 05-08-2017	
CHECK BY SHEKHAR	DATE 05-08-2017	
APPROVED BY SHEKHAR	DATE 05-08-2017	

If any quenes contact projects@ninva.com

NOTE ALL DIMENSIONS ARE IN mm


24/8/2017


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT


Scanned by CamScanner


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

DOOR LOCATION - GRID Q1- Q2

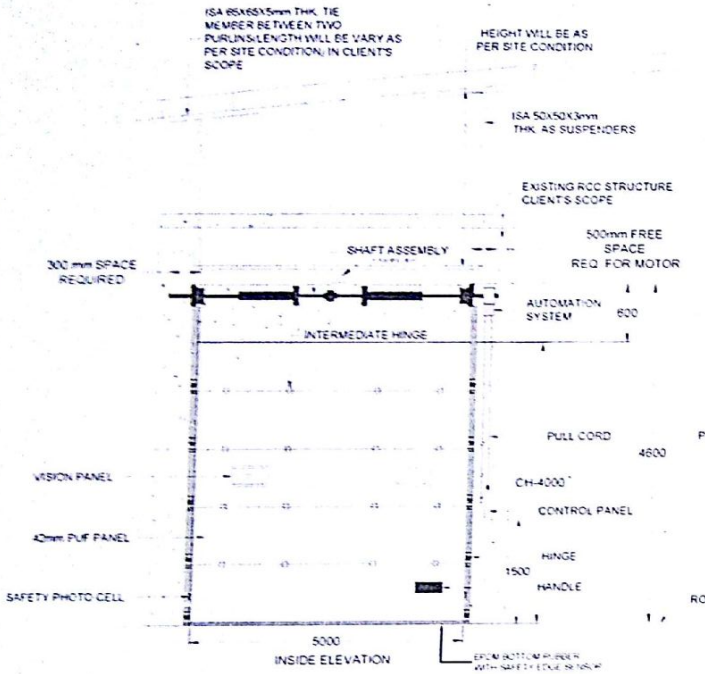

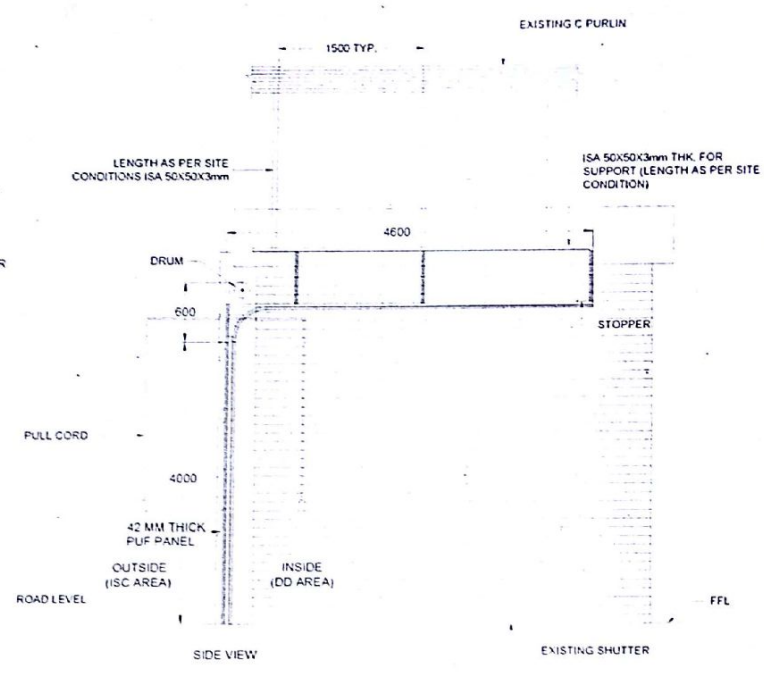

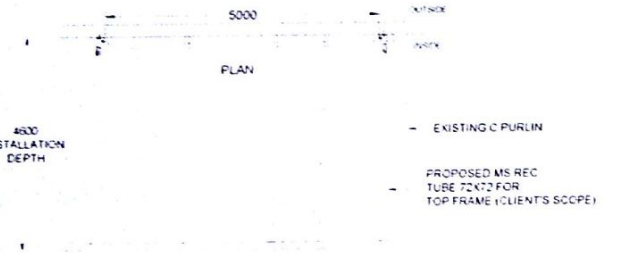

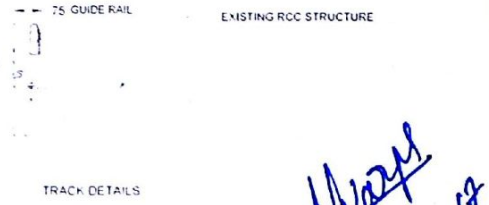

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
5000 mm	4000 mm	1

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm THK. FIRE RETARDANT PUF INSULATED PANELS
DOOR HINGE	———	HEAVY DUTY HINGE FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		ENAMEL PAINT WITH APPROVED SHADE RAL 5012 LIGHT BLUE

ACCESSORIES:
1. SAFETY PHOTOCELL - 1 PAIR /DOOR
2. FLASH LIGHT - 2 SIDE OF DOOR
3. PULL CORD SWITCH - 1 SINGLE SIDE

IMPORTANT NOTES:

1. REQUIRED STRUCTURE FOR DOOR SHALL BE IN CLIENT'S SCOPE.
2. SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
3. ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

NIHVA TECHNOLOGIES PVT LTD

NIHVA TECHNOLOGIES PVT LTD PUNE
Email - info@nihva.com
Website - www.nihva.com

TITLE:

SECTIONAL DOOR SL 1 (MOTORIZED)

CLIENT'S APPROVAL

CLIENT - SCON PROJECTS

PROJECT - BEKAERT INDUSTRIES PVT.LTD.

SITE LOCATION - RANJANGAON, MIDC

DWG. NO. : NIHVA/17-18/0140

SCALE: NTS	WT	SHEET 1 OF 1
DRAWN BY OMKAR	DATE 05-08-2017	
CHECK BY SHEKHAR	DATE 05-08-2017	
APPROVED BY SHEKHAR	DATE 05-08-2017	

If any queries contact projects@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

24/08/17

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

Scanned by CamScanner