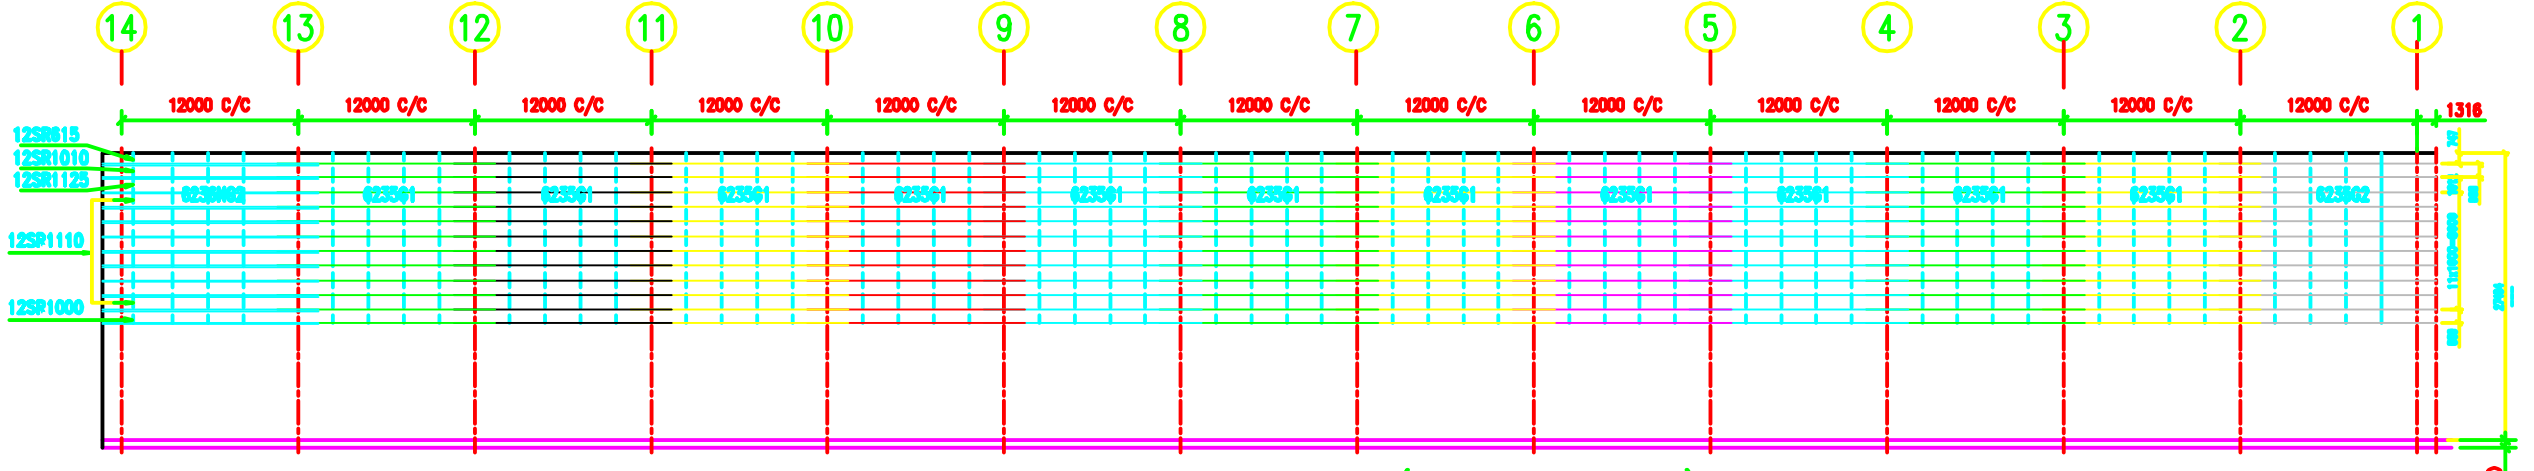

SIDEWALL FRAMING ALONG AXIS-F (ABOVE LEAN-TO)

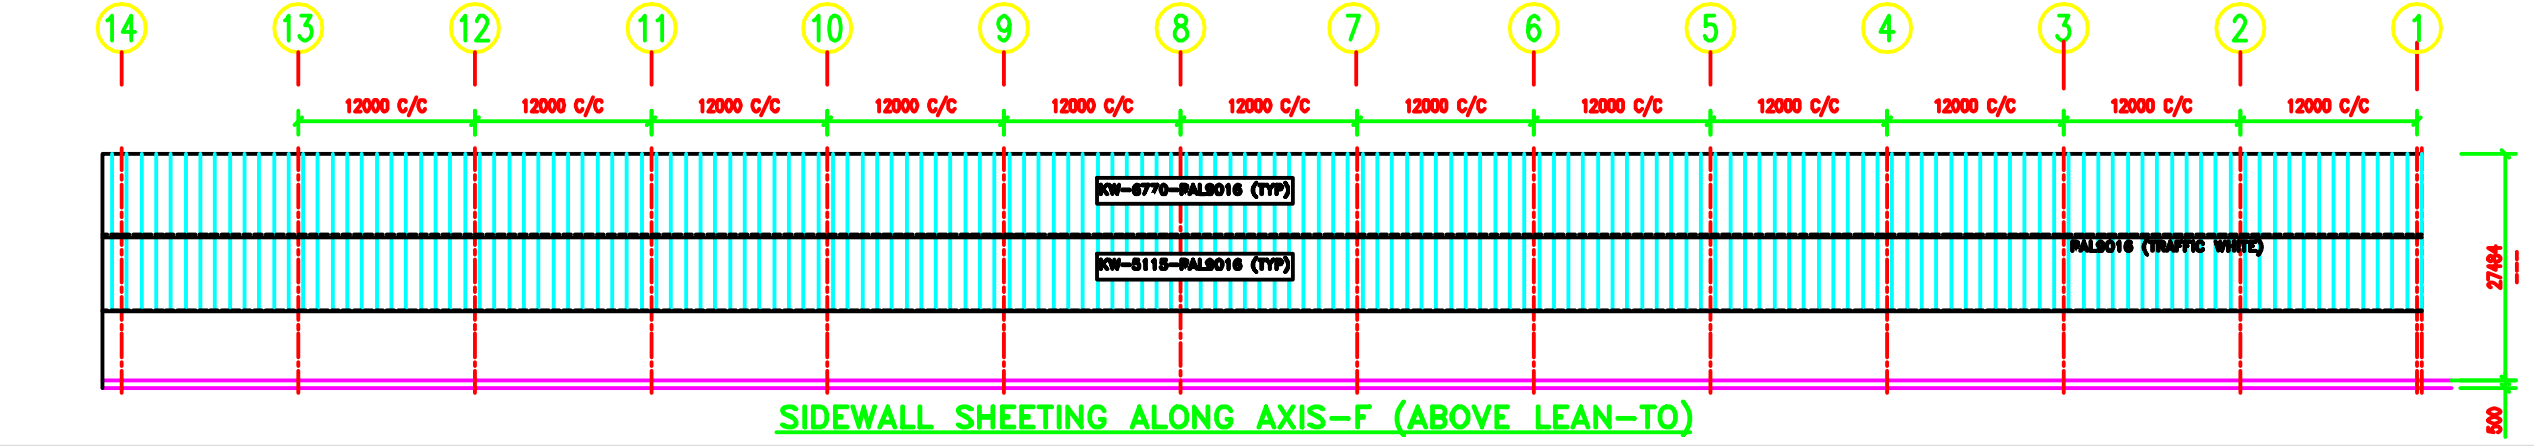

SIDEWALL SHEETING ALONG AXIS-F (ABOVE LEAN-TO)

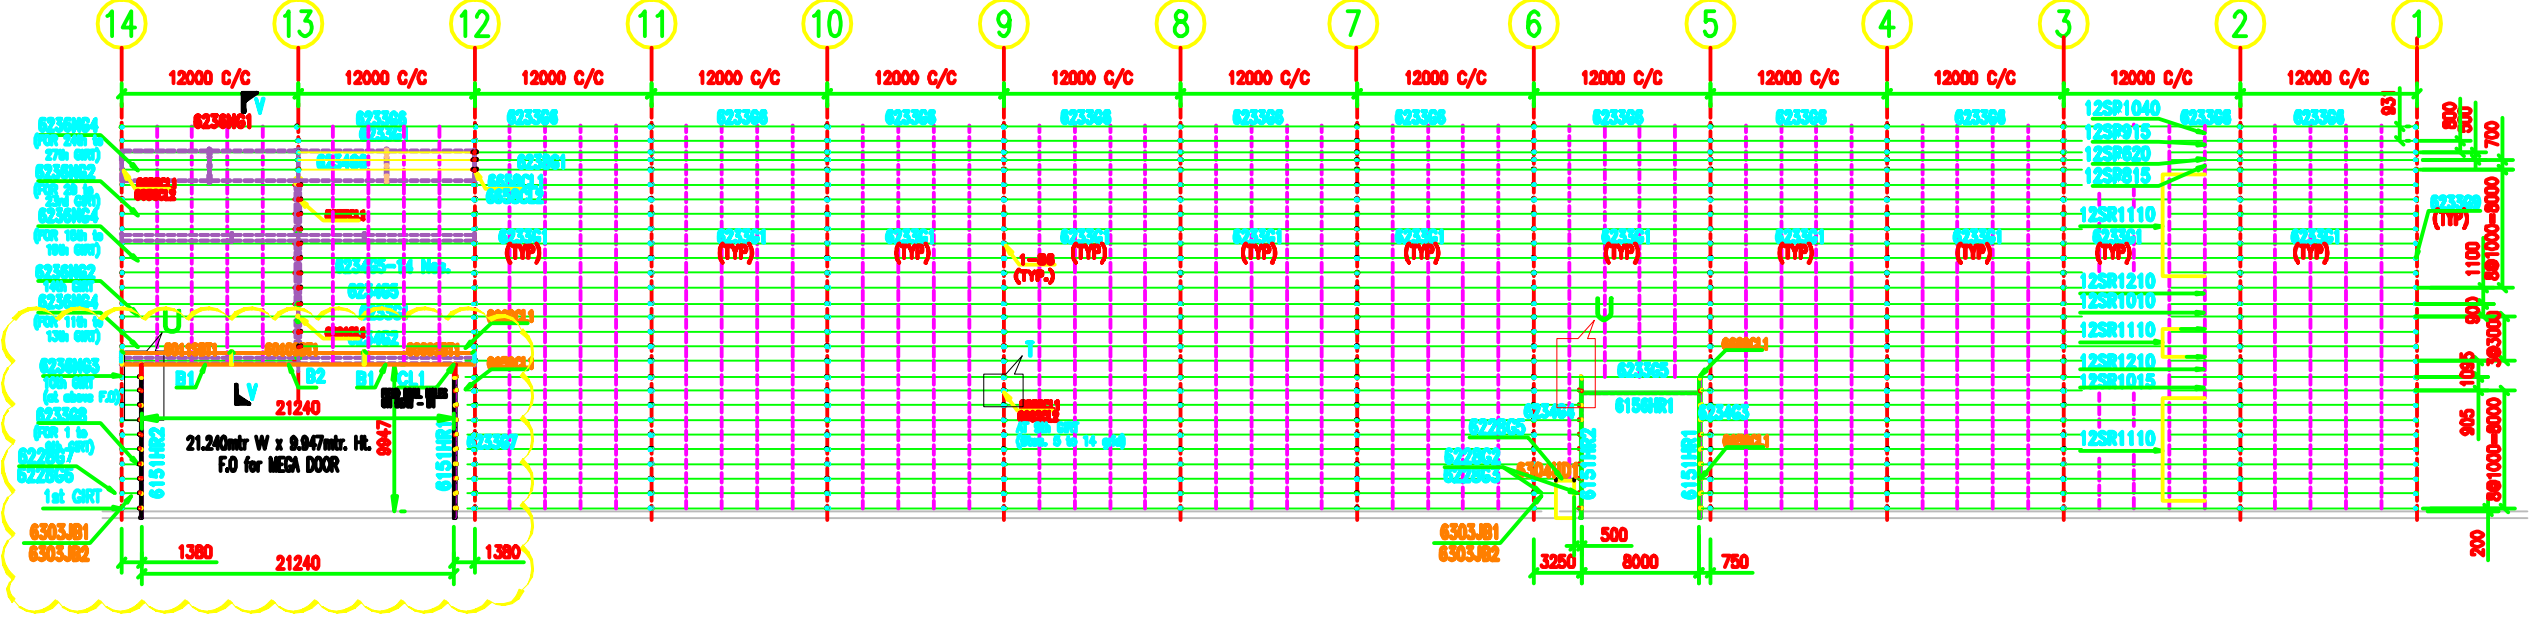

SIDE WALL PARTITION GIRTS ALONG AXIS-GL.D

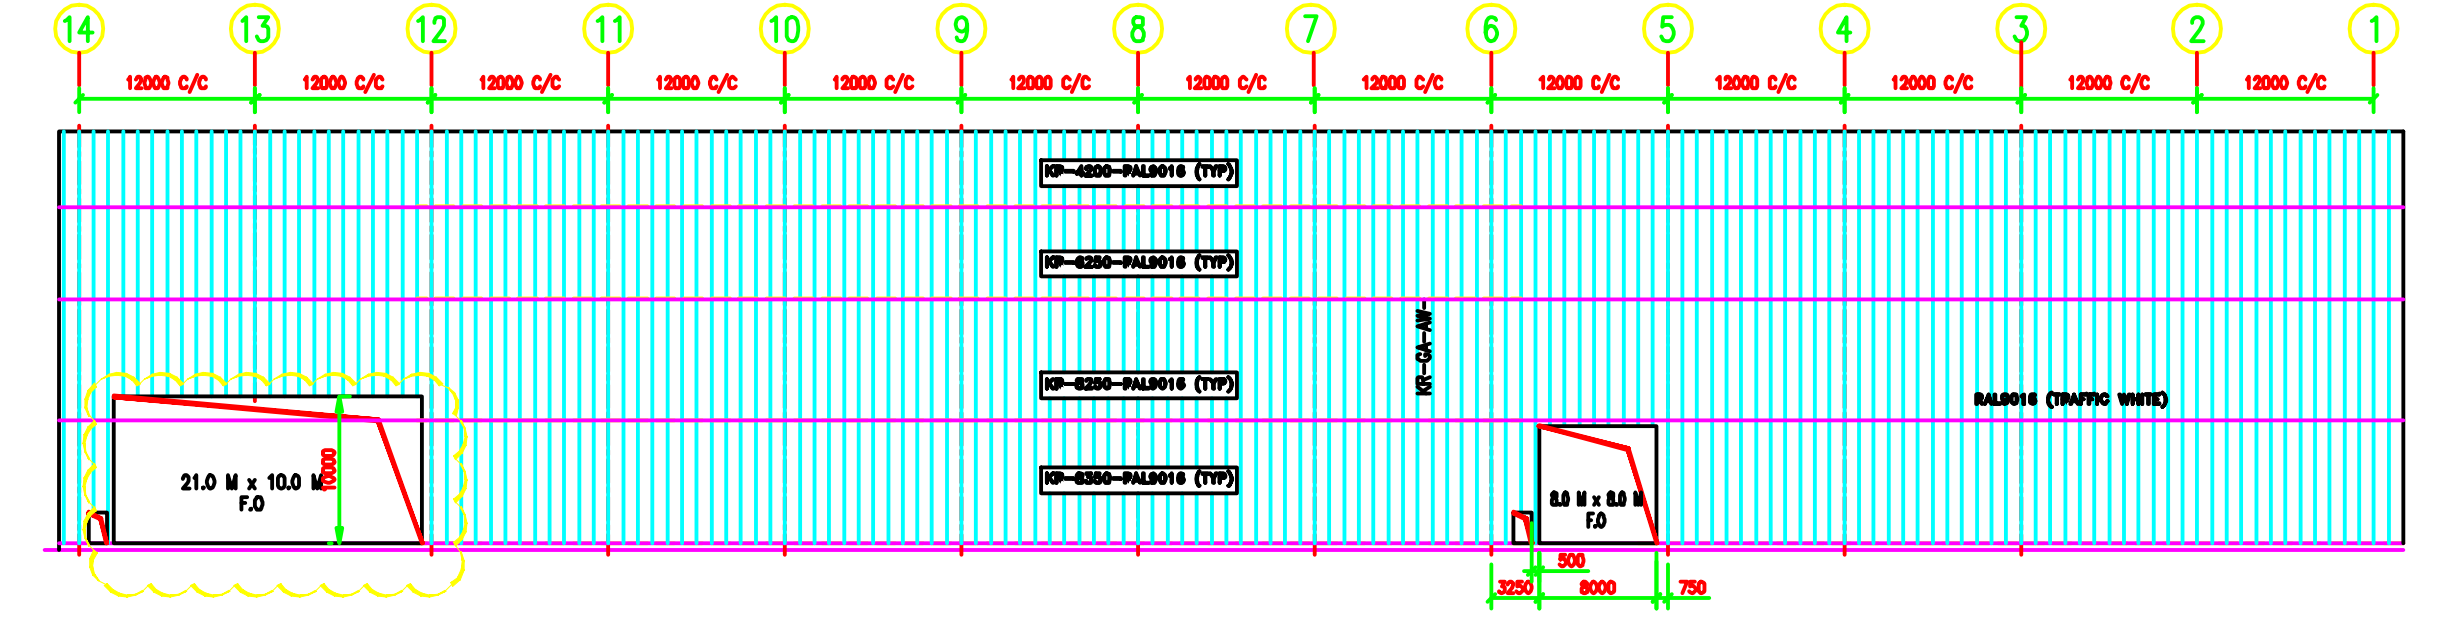

SIDEWALL PARTITION SHEETING ALONG AXIS-D



DETAIL-T



DETAIL-U



DETAIL-S



SECTION THRU' JAMB
WALL INSULATION DETAILS

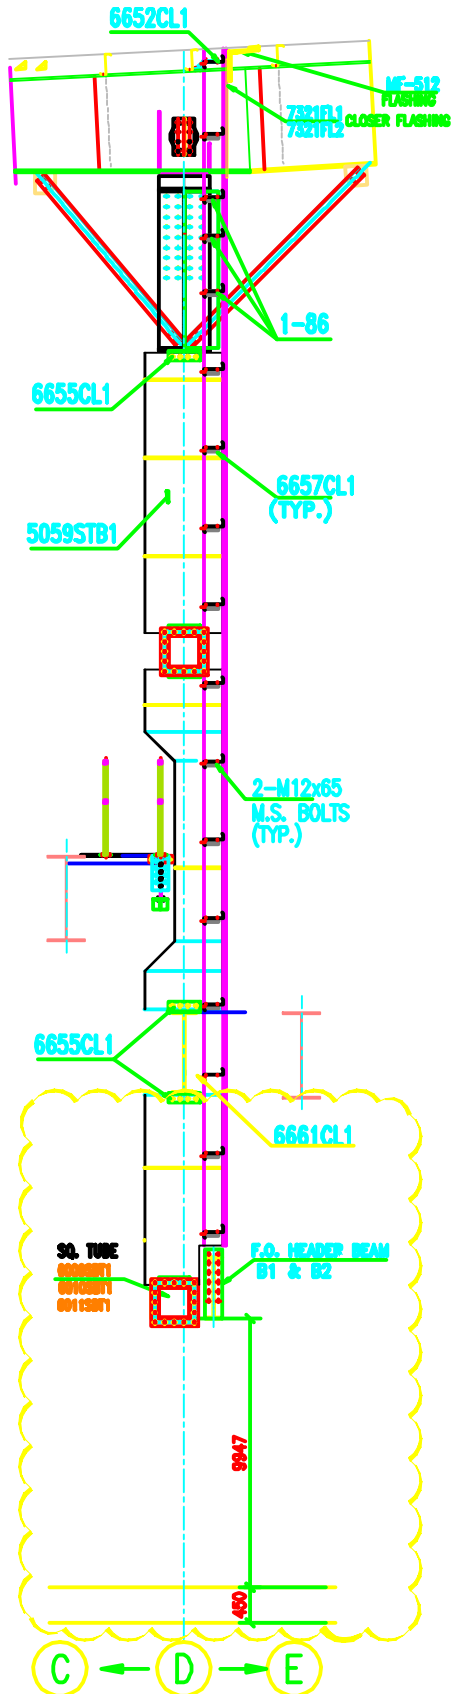

SECTION VV

GENERAL NOTES:

1.All dimensions are in mm unless noted otherwise.

2.Bracing is to be installed as per the erection drawings and must remain tight during the life of the building. Do not remove any bracing without the written consent of the Engineering Department at KIRBY BUILDING SYSTEMS INDIA LTD.

3.Placing permanent bracing and temporarily guying the structure during erection prior to placing sheeting / cladding is extremely important. The removal of permanent bracing and/or providing insufficient temporary guy lines may cause the collapse of the building during or after erection which will be the Contractor's / Owner's responsibility.

4.Gusset plates for flange braces are welded on both sides of the column and rafter, however flange braces are required at one side(unless noted otherwise). For aesthetic reasons, it is preferable to install them all at the same side of column and rafter. The side chosen depending on erection sequence.

5.Start erection at the braced bay.

6.Use temporary guy wires and ratchet pullers for stability.

7.Install permanent bracing i.e. cables,rods, angles, and flange braces.

8.Guy wires should be attached to an immovable object such as cast in anchor bolts, or heavy object.

9.Plumb & align the first bay before proceeding.

10.Use high strength bolts(A325) where indicated.

11. Tighten all high strength bolts after final alignment of the building.

12.Frame alignment should be within 1:300 tolerance.

13. Use temporary supports to align girts before fixing sheets.

14.Do not apply any live loads to purlins before roof sheeting is complete.

FOR CONSTRUCTION

BUILDING MUST BE ERECTED IN STRICT ACCORDANCE WITH THESE DRAWINGS.
ANY DEVIATION MUST HAVE PRIOR APPROVAL FROM K B S I L.

K B S I L WILL NOT ACCEPT RESPONSIBILITY FOR ANY VARIATIONS OR OMISSIONS WHICH DO NOT HAVE THEIR WRITTEN CONSENT.

REV. NO.	DESCRIPTION	DATE	DRN. BY	CHK. BY
4	RE-ISSUED FOR CONSTRUCTION	05.08.15	VGD	VSK
3	RE-ISSUED FOR CONSTRUCTION	23.03.15	VGD	VSK
2	RE-ISSUED FOR CONSTRUCTION	08.07.14	VGD	VSK
1	RE-ISSUED FOR CONSTRUCTION	27.05.14	VGD	VSK
0	ISSUED FOR CONSTRUCTION	10.01.14	VGD	VSK
F	RE-ISSUED FOR APPROVAL	27.12.13	VGD	VSK
E	RE-ISSUED FOR APPROVAL	30.10.13	VGD	VSK
D	RE-ISSUED FOR APPROVAL	25.09.13	MVV	VSK
C	RE-ISSUED FOR APPROVAL	20.08.13	VGD	VSK
B	RE-ISSUED FOR APPROVAL	22.08.13	VGD	VSK
A	ISSUED FOR APPROVAL	14.08.13	VGD	MMR

PEB CONTRACTOR	Kirby	KIRBY BUILDING SYSTEMS DRG.NO. E-14B	REV.NO. 4
DETAILED ENGINEERING CONSULTANT			
CLIENT-	ALSTOM BHARAT FORGE	ALSTOM BHARAT FORGE POWER LTD	
APPROVED BY		SIGN	DATE
PROJECT	PROPOSED FACILITY AT		

	SIGN	DATE				
DESIGNED BY			TITLE	SIDE WALL FRAMING & SHEETING DETAILS ALONG GL. D & F		
DRAWN BY			DRG.NO.	34080/HY-03786 A1. FACTORY		
CHECKED BY			SCALE	1:300	REV.	2
APPROVED BY			FILE	34080/HY-03786 A1. FACTORY		