NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

# PROJECT PROPOSAL

# NIHVA TECHNOLOGIES PVT. LTD.

187, G-Block, Thermax chowk, Above Renault Showroom, MIDC
Chinchwad, Pune – 411019.

| | |
|---|---|
| Customer Name | **ITC HYDRABAD** |
| Project Name | **TRS PACKING AUTOMATION** |
| Project Location | Guntur |
| Contact Person Name | Mr. Nitesh K. |
| Email Id | Nitesh.k@itc.in |
| Contact Number | +91-9866270686 |

Contact Person: Mr. Arjun Patil
Mob No.: 8551096333
Email id: automation@nihva.com
Web: http://www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

# Project Title: TRS PACKING AUTOMATION

Date: 17/7/2018


Dear Sir,


Thank you for the opportunity and trust shown on “NIHVA” your preferred partner for innovative solutions. This has reference to your above mentioned requirements as well as our subsequent communication; please find below our best offer.

**A. Requirement:**

Packing of chili powder pouches of different sizes. Require process is as below.

**Process Flow Chart for Process 1:**

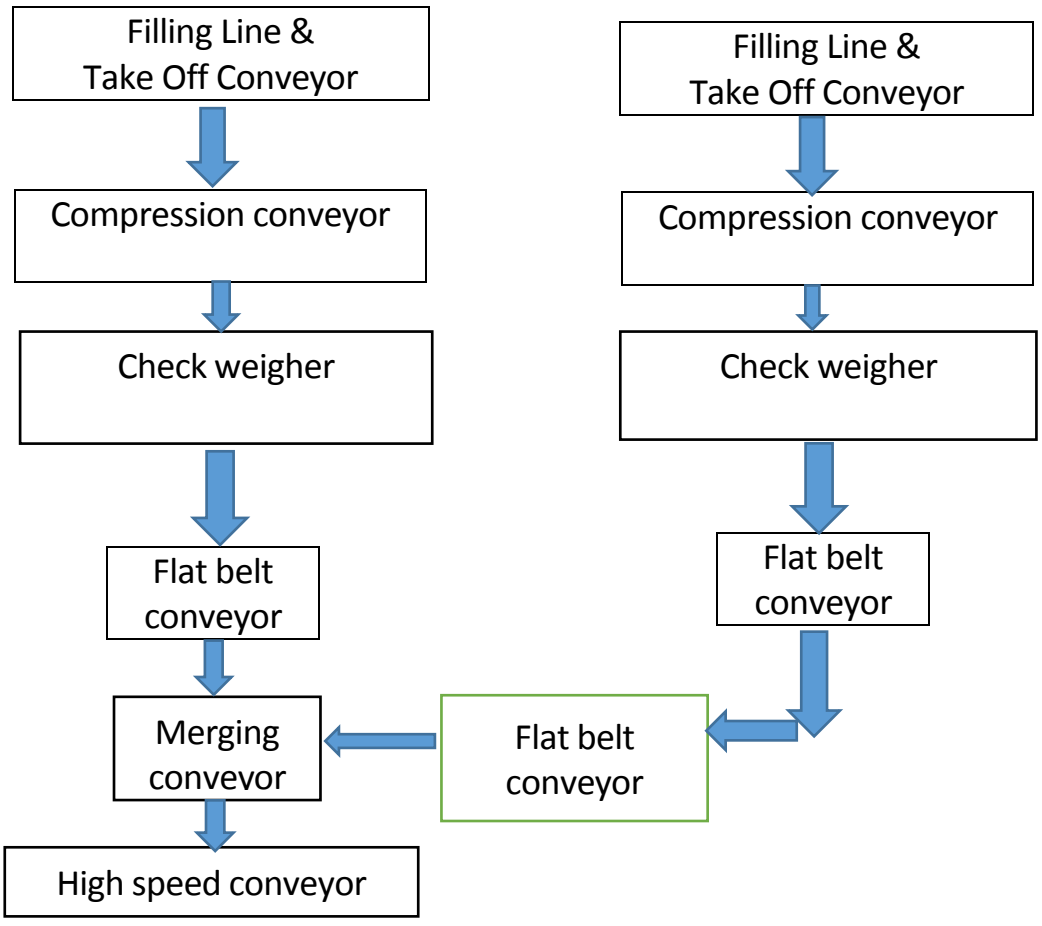

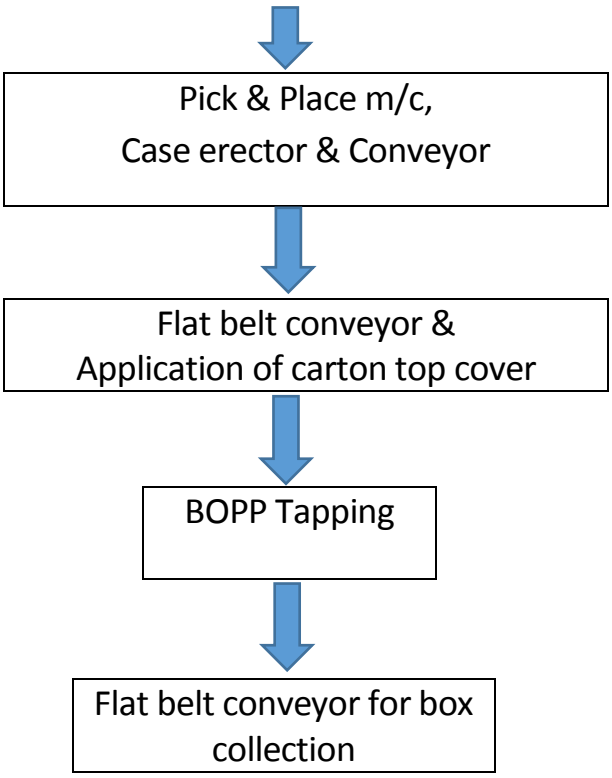


**Manual application of box cover**

**Product Details : ( for 1 kg chilly bag )**

| Details | |
|---|---|
| Pack size | 330 x 190 x 55<br>L x B x H |
| Pouch Style | Side gazetted Penta seal |
| Pouches/shipper (nos) | 06 no's |
| Kg/shipper | 6 kg |
| Shipper size | 300 x 190 x 225<br>L x B x H |
| Shipper type | 3 ply |
| No.of machines | 01 |
| Machine output | 80 Pouches/min |



**Product Details : ( for 100gms chilly pouch )**

| Details | |
|---|---|
| Pack size | 190 x 110 x 15<br>L x B x H |
| Pouch Style | Side gazetted Penta seal |
| Pouches/shipper (nos) | 20 nos' |
| Kg/shipper | 2 kg |
| Shipper size | 320 x 110 x 180<br>L x B x H |
| Shipper type | 3 ply |
| No.of machines | 01 |
| Machine output | 80pouches/min |



## Technical Specifications: - (For 5 kg Tea Bag)

| Sr No. | Packaging System Description | QTY | |
|---|---|---|---|
| **1** | **compression Conveyor A** | | **1** |
| | • Conveyor Width | 350 mm | |
| | • Conveyor Length | 2050 mm | |
| | • Construction | MS Powder Coated | |
| | • Contact Parts | SS304 | |
| | • SKID PLATE | SS304 | |
| | • Motor | Bonfiglioli with Gear | |
| **2** | **Flat belt conveyor A** | | **1** |
| | • Conveyor width | 350 mm | |
| | | | |
| | • Conveyor length | 1062mm | |
| | • Construction | MS Powder Coated | |
| | • Contact parts | SS304 | |
| | • Skid plate | SS304 | |
| | • Motor | Bonfiglioli with Gear | |
| | | | |
| 3 | **compression Conveyor B** | | **1** |
| | • Conveyor Width | 350 mm | |
| | • Conveyor Length | 2050 mm | |
| | • Construction | MS Powder Coated | |
| | • Contact Parts | SS304 | |
| | • SKID PLATE | SS304 | |
| | • Motor | Bonfiglioli with Gear | |
| **4** | **Flat belt conveyor A** | | **1** |
| | Conveyor width | 350 mm | |
| | Conveyor length | 1362mm | |
| | Construction | MS Powder Coated | |
| | Contact parts | SS304 | |
| | Skid plate | SS304 | |
| | Motor | Bonfiglioli with Gear | |
| | | | |
| **5** | Flat belt conveyor | | **1** |
| | • Conveyor Width | 330 mm | |
| | • Conveyor Length | 1700 mm | |

| | | | |
|---|---|---|---|
| | • Construction | MS Powder Coated | |
| | • Contact Parts | SS304 | |
| | • SKID PLATE | SS304 | |
| | • Motor | Bonfiglioli with Gear | |
| | | | |
| **6** | **Merging conveyor** | | **1** |
| | • Conveyor Width | 350 mm | |
| | • Conveyor length | 1000 mm | |
| | • Construction | MS Powder coated | |
| | • Contact parts | Ss304 | |
| | | | |
| **7** | **Check Weigher & Rejector Machine** | | **1** |
| | • Display | Graphic LCD | |
| | • Maximum weight | 6 kg | |
| | • Weighing Scale | 0-6 kgs. | |
| | • Accuracy | is + /- 0.2 kg | |
| | • Conveyor Belt | Roller Type | |
| | • Conveyor Belt Width | 350 mm | |
| | • Speed | 80 pouches/min | |
| | • Sensor | Load Cell | |
| | • Material of construction | MS Powder Coated | |
| | • Rejection Mechanism | Conveyor Stoppage/Pneumatic Pusher Type | |
| | • Power Consumption | approx. 350 VA | |
| | | | |
| **8** | **High speed conveyor** | | **1** |
| | • Conveyor width | 350mm | |
| | • Conveyor length | 1200 | |
| | • Construction | MS Powder coated | |
| | • Contact parts | SS304 | |
| | • Skid plate | SS304 | |
| | • Motor | Bonfiglioli with gear | |
| | | | |
| **9** | **Automatic Carton Erector Machine** | | **1** |
| | • Production speed | 12 cartons/min | |
| | • Carton size(mm) | 300 L x 190 W x 225H | |
| | • Power supply | 110/220V50/60HZ 1Phase 200W | |
| | • Air Compressing | 6kg/cm³ | |
| | • Adhesive tape width | 48/60/75MM | |
| | • Machine dimension | L2000xW1900xH1450mm | |
| | • Machine weight | 450 Kgs | |
| | • Motor | Bonfiglioli with Gear | |
| | | | |

| | | | |
|---|---|---|---|
| **10** | **Flat belt conveyor** | | **1** |
| | • Conveyor Width | 330 mm | |
| | • Conveyor Length | 1700 mm | |
| | • Construction | MS Powder Coated | |
| | • Contact Parts | SS304 | |
| | • SKID PLATE | SS304 | |
| | • Motor | Bonfiglioli with Gear | |
| | | | |
| **11** | **Automatic Carton Sealer (BOPP Tapping)** | | **1** |
| | • Carton Size | 300 L x 190 W x 225H | |
| | • Sealing Capacity | About 1000 Standard Case Per Hour | |
| | • Adhesive Tape Used | BOPP Self Adhesive Tape | |
| | • Power Sources | 220 V, 50 Hz, 250w | |
| | • Max Sealing Dimensions { W X H } | 200mm X 225mm | |
| | •Min. Sealing Dimension { W X H } | 300+-100 mm | |
| | • Motor | Bonfiglioli with Gear | |
| | | | **1** |
| **12** | **Flat belt conveyor** | | **1** |
| | • Conveyor Width | 330 mm | |
| | • Conveyor Length | 1700 mm | |
| | • Construction | MS Powder Coated | |
| | • Contact Parts | SS304 | |
| | • SKID PLATE | SS304 | |
| | • Motor | Bonfiglioli with Gear | |
| | | | |
| | | | |

## Images : -

1. Roller Flattening Conveyor





2. Check weigher & Rejecter Machine



| Sr no | Description | Qty | Unit | Rate in INR | Net Amount INR |
|---|---|---|---|---|---|
| 1 | Compression conveyor | 2 | No | 1,70,000 | 3,40,000 |
| 2 | Flat belt conveyor (L 1000) | 1 | No | 65000 | 65000 |
| 3 | Flat Belt Conveyor (L800) | 1 | No | 50,000 | 50,000 |
| 4 | Flat belt conveyor (L1700) | 1 | No | 95,000 | 95,000 |
| 5 | Merging conveyor (L1000) | 1 | No | 65,000 | 65,000 |
| 6 | Check Weigher (up to 1kg product) | 2 | No | 5,80,000 | 11,60,000 |
| 7 | High Speed Conveyor | 1 | No | 70,000 | 70,000 |
| 8 | Carton Erector Machine | 1 | No | 8,50,000 | 8,50,000 |
| 9 | Roller Conveyor | 1 | No | 90,000 | 90,000 |
| 10 | Pop up units | 2 | No | 90,000 | 180,000 |
| 11 | Box tilting & Pouch Feeding Unit | 1 | No | 4,00,000 | 4,00,000 |
| 12 | Flat belt conveyor (L 1000) | 2 | No | 65,000 | 1,30,000 |

| | | | | | |
|---|---|---|---|---|---|
| 13 | Case Taping Machine / BOPP machine | 1 | No | 2,75,000 | 2,75,000 |
| **Cost of Project** | | **1** | **Set** | | **37,70,000** |
| | | | | TOTAL | **37,70,000** |

| | |
|---|---|
| **GST PUNE: 27AAECN0437H1ZM** | **Amount in Words:** |
| **HSN Code: 84289090** | Rupees Thirty-Seven Lacs Seventy Thousand Only |

**E. Drawings Training and warranty**

- **Drawing:**

We will issue a full set of drawings for approval within 2 weeks of receiving the confirmed order and finalized design details.

- **Training:**

After installation of the Conveyor system, we will train the Clients personnel in the operation and basic maintenance, including the understanding of the error codes on the control system (if applicable).

- **Warranty:**

I. The warranty period is twelve months from the date of installation and commissioning.

II. If a defect arises within the warranty period stated, which is attributable to faulty design,

III. materials or installation workmanship the product will be repaired at our discretion without charge.

IV. This guarantee is subject to proper use of the product and assumes that the product is regularly serviced and maintained by skilled personnel in accordance with the operation and maintenance instructions supplied.

- **Maintenance & Service Agreement:**

We would suggest that you take advantage of a maintenance and service agreement on the NIHVA products, which will guarantee trouble free operation and speed of response in an emergency. Customized proposals are available on request.

We are pleased to inform that we also undertake AMC for all of our products & for any of your existing facilities.

Maintenance and service aren't about what you get. They're about what you avoid: failures, losses and unplanned interruptions.

- **Client Scope:**

1. Unloading from truck placement on site.

2. Exiting/Repair/ Modification/ Refurbishment charges will be extra.

## G. Terms and Conditions: -

| | | |
|---|---|---|
| **1.** | **Price** | : Ex. Works Pune |
| **2.** | **P & F** | : 3 % Extra at the time of delivery. |
| **3.** | **Freight Notes** | : Extra as applicable. |
| **4.** | **Delivery** | : Within 10- 12 weeks from date of receipt of confirmed purchase order, advance payment, drawing approval. |
| **5.** | **Payment Terms** | : 80% advance along with confirmed purchase order balance before dispatch. |
| **6.** | **Insurance** | : Extra as applicable. |
| **7.** | **GST** | : As Applicable on total supply value. |
| **8.** | **Validity** | : 15 days from date of quotation. |
| **9.** | **Warranty** | : 12 months from date of supply. |

Please feel free to contact Mr. Arjun Patil on 8551096333 for any further clarification in this concern.

With Best Regards,
Arjun Patil
For NIHVA Technologies Pvt Ltd