


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2180	2970	595	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2230	3020	600	

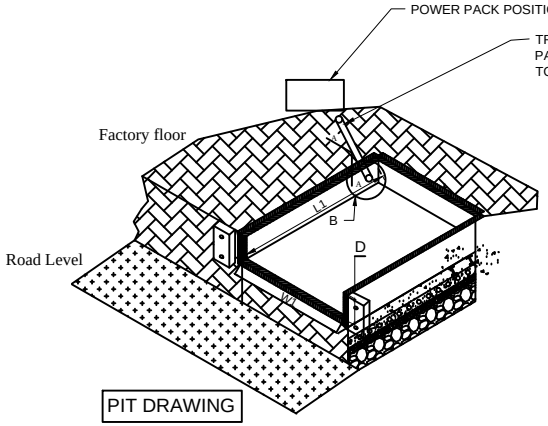


PIT DRAWING



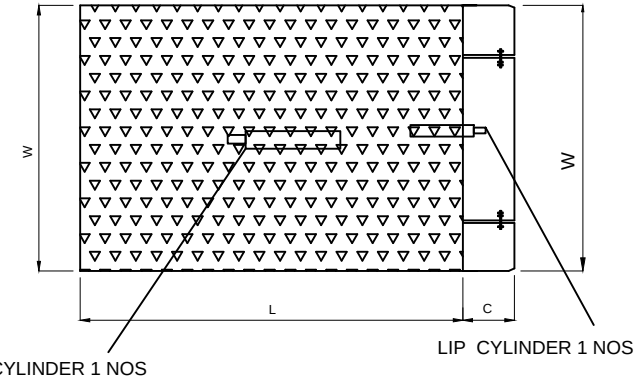



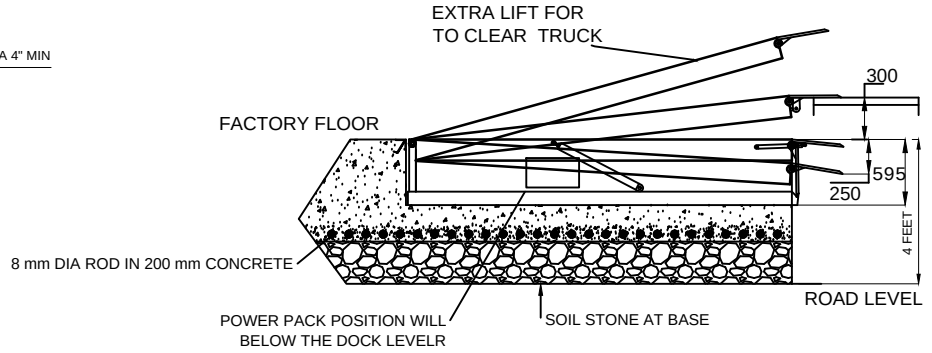

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE +-15 MM

DOCK LEVELER- 10 TON CAPACITY -

CLIENT APPORVAL-		NIHVA TECHNOLOGIES PVT. LTD. — NIHVA TECHNOLOGY PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
DRAWN :- ABHIJIT	DATE : -11/10/2015	CLIENT - SKIPPER ELECTRICALS
CHECKED :- ANIL	REV.:- 01	PROJECT -
ALL DIMENSION ARE IN mm		SITE -
If any queries contact : projects@nihva.com		DWG. NO. - NIHVA/15-16/93