NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PDIR FOR GEAR OPERATED ROLLING SHUTTER

Client name	:-	Shree Pee-Tech	NIHVA-PRJ-F-07
project name	:-		Date :- ~~31/03/23~~ 31/03/23
quantity	:-	01	
Rolling shutter size	:-	3000 X 3000 mtr	

INSPECTION POINTS		Ok	NA
1	Guide (3000 MM X ~~80~~ 75 MM)	☑	☐
2	Gear drive & assembly	☑	☐
3	Bearing fitting & welding	☑	☐
4	Slats quality & painting ok (mm length)	☑	☐
5	Bottom rubber gasket (50 mm)	☑	☐
6	Bracket welding (380 mm)	☑	☐
7	Hood cover ok (1.5 MM Thick)	☑	☐
8	Bracket painting	☑	☐
9	Bottom profile ok (3110 mm length)	☑	☐
10	shaft quality/painting (3100 mm)	☑	☐
11	Gril quality (mm X mm)	☐	☑

Remarks (if any) :-

① shutter guide length 3000 ~~mm~~ ~~the~~ effected on door height (decrease by 150 mm)
② mounting in structure ③ wall thickness 240 mm

Quality Engineer Name	:-	Rohit Pawar / Sandip Mandwade
Sign of Quality Engineer	:-	Sidip 01/04

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PDIR FOR GEAR OPERATED ROLLING SHUTTER

Client name	:-	Shree fab	NIHVA-PRJ-F-07
project name	:-	Adani group	Date :- 01/04/23
quantity	:-	05	
Rolling shutter size	:-	4000 X 4000 mm	

INSPECTION POINTS	Ok	NA
1 Guide (4000 MM X ~~80~~ 75 MM)	☑	☐
2 Gear drive & assembly	☑	☐
3 Bearing fitting & welding	☑	☐
4 Slats quality & painting ok (mm length)	☑	☐
5 Bottom rubber gasket (U Bidding 20 mm)	☑	☐
6 Bracket welding (380 mm)	☑	☐
7 Hood cover ok (1.5 MM Thick)	☑	☐
8 Bracket painting	☑	☐
9 Bottom profile ok (4100 mm length)	☑	☐
10 shaft quality/painting (4100 mm)	☑	☐
11 Gril quality (mm X mm)	☐	☑


Remarks (if any) :-

① Shutter guide length is 4000 mm its effected on clear Height (decrease 150 mm)

② Shutter in Stainless mounting ③ Wall thickness 240 mm

Quality Engineer Name :- Rohit Pawar Sandip Mandavgade

Sign of Quality Engineer :- 01/04

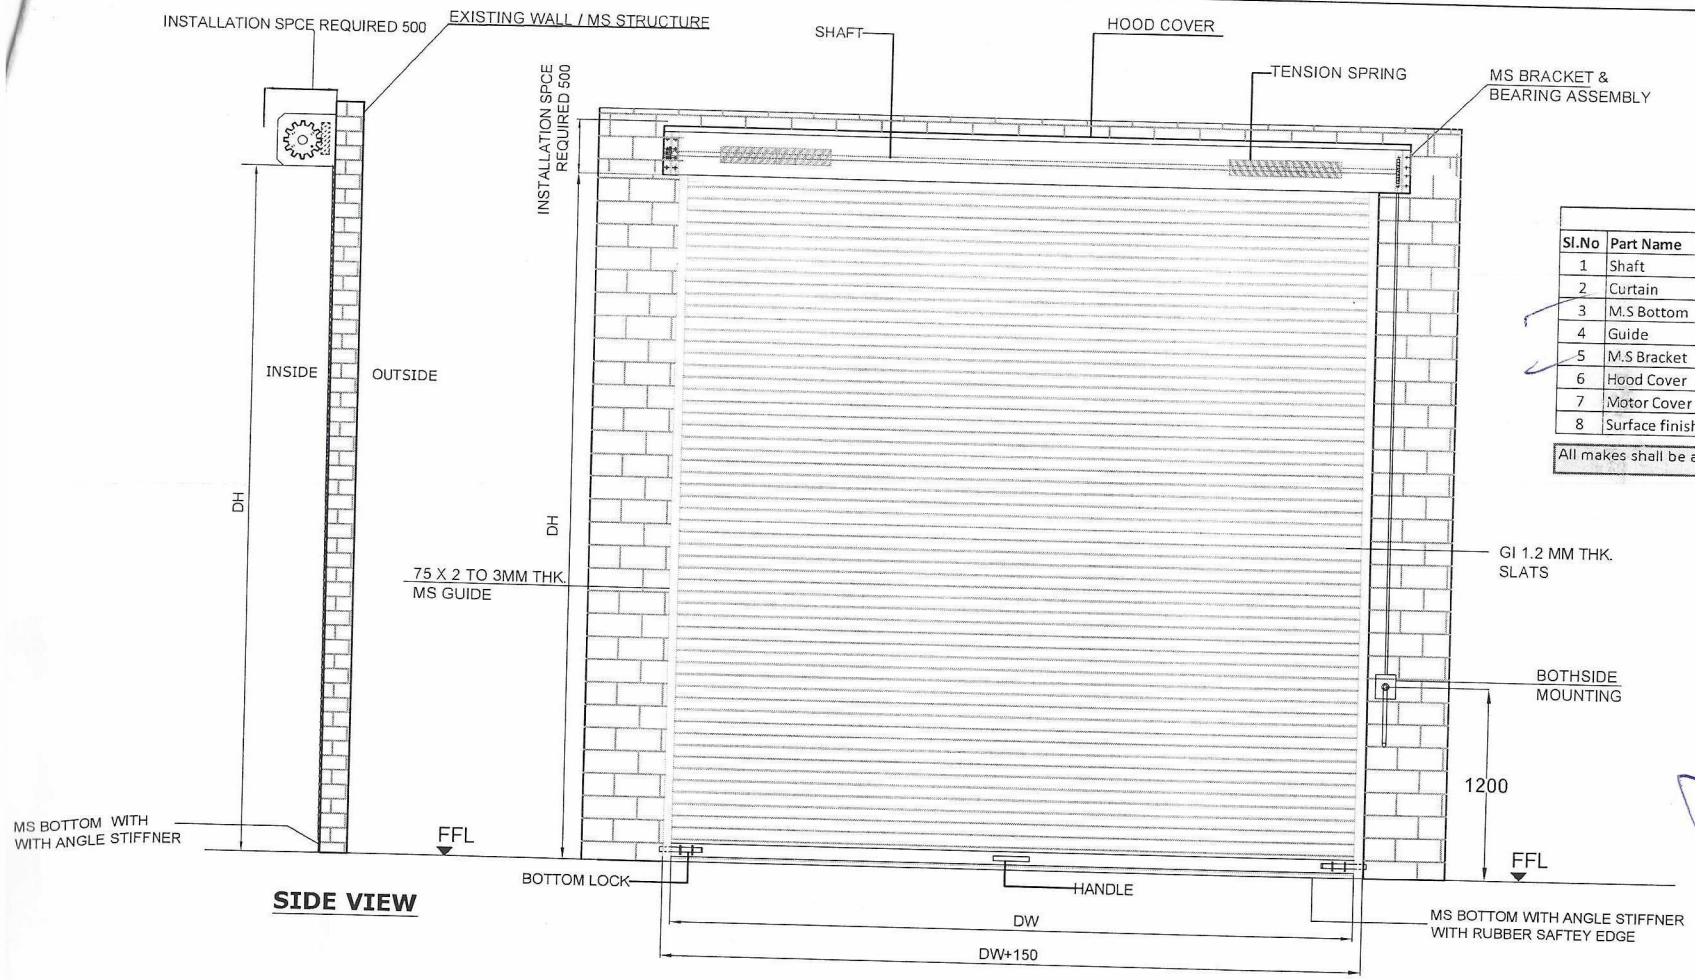


SIDE VIEW


Technical Data		
Sl.No	Part Name	Description
1	Shaft	Minimum 150DN(165OD) as per IS 1239
2	Curtain	1.2mm approx 350Mpa for GI
3	M.S Bottom	2.5mm thickness
4	Guide	75 X 2 to 3mm thickness
5	M.S Bracket	400X400X5 NIHVA make IS 2062
6	Hood Cover	0.9 to 1.2mm with NIHVA make
7	Motor Cover	0.9 to 1.2mm with NIHVA make
8	Surface finish	Powder coating

All makes shall be approved by our Quality Department.

OUTSIDE ELEVATION

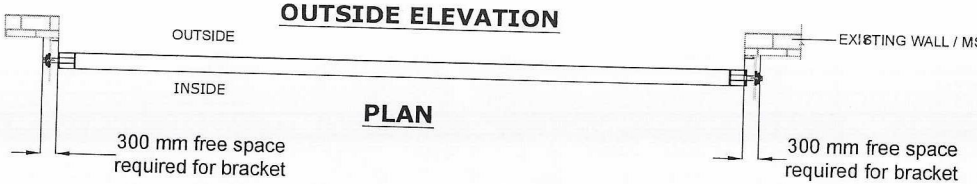

PLAN

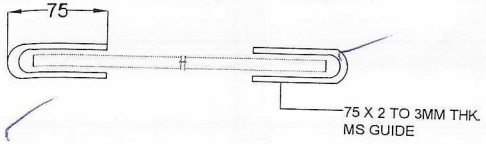

Colour Shall be match with side cladding.

RAL CODE	SHADE	COLOUR
RAL 9001	CREAM	
RAL 5002	ULTRAMARINE BLUE	
RAL 7035	LIGHT GREY	
RAL 7001	SILVER GREY	

NOTE:-

1. ALL DIMENSION ARE IN MM
2. SURFACE FINISH: POWDER COATING OF APPROVED RAL CODE
3. MOUNTING: ON CONCRETE COLUMN/WALL OR MS STRUCTURE, KINDLY CONFIRM
4. IF MS STRUCTURE REQUIRED WILL BE IN SHREE PRE FAB STEEL PVT LTD SCOPE
5. KINDLY CONFIRM INSIDE OR OUTSIDE MOUNTING Inside Mounting

Shall be fixed on structural frame. Frame shall be as per requirement and shall be supplied by M/s Shree Pre Fab SPL

REV.NO	REVISION	DATE	REVISED BY

CLEAR WIDTH (DW)	CLEAR HEIGHT (DH)	QTY
4000	4000	3NOs

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- GEAR OPERATED ROLLING SHUTTER

	NAME	DATE
DRAWN	SUJATA.B	11/01/2022
CHECK	A.K	11/01/2022
APPROVAL	V.T	11/01/2022

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - SHREE PRE FAB STEEL PVT LTD

PROJECT -ROLLING SHUTTER

DWG. NO. : NIHVA/22-23/CLT/0176 | REV-00

SCALE: NTS | WT: | SHEET: 01 OF 01

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PDIR FOR MOTORIZED ROLLING SHUTTER

Client name	:-	Sakshi Associate	NIHVA-PRJ-F-
project name	:-		Date :- 14/03/23
quantity	:-	02	
Rolling shutter size	:-	8000 X 8500 mm	


INSPECTION POINTS		Ok	Not ok
1	Guide (X 115 X 100 MM)	☑	☐
2	Chain drive & assembly	☑	☐
3	Bearing fitting & welding	☑	☐
4	Slats quality & painting ok (mm length)	☑	☐
5	Bottom rubber gasket (8230 mm)	☑	☐
6	Bracket welding (mm)	☐	☐
7	Hood cover ok (0.9 MM Thick)	☐	☑
8	Bracket painting	☑	☐
9	Bottom profile ok (8230 mm length)	☑	☐
10	shaft quality/painting (8500 mm)	☑	☐
11	Gril quality (8230 mm X 1500 mm)	☑	☐


Remarks (if any) :-

① Hood cover quality very poor
② Shutter assembly material checked except motor drive, safty catch
③ some place Guide bend or twist found.


Quality Engineer Name :- Rohit Pawar / Sandip Mandawade

Sign of Quality Engineer :- Rohit / Sandip 14/03/23

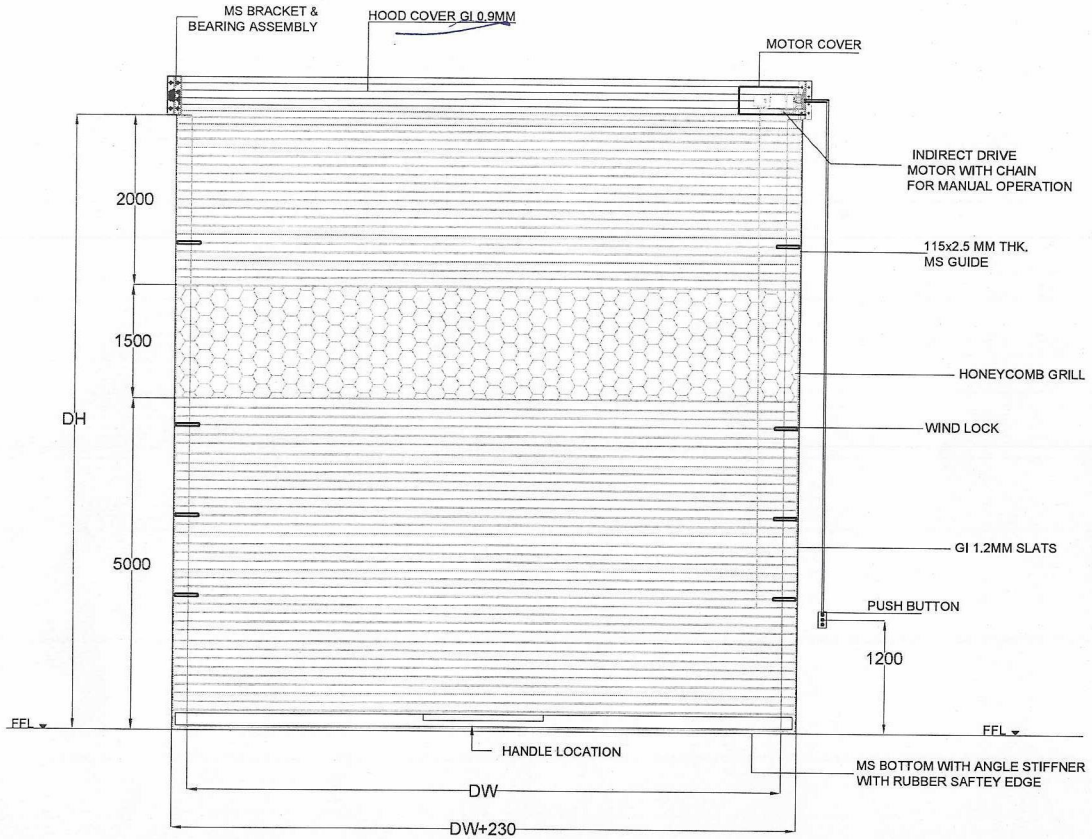

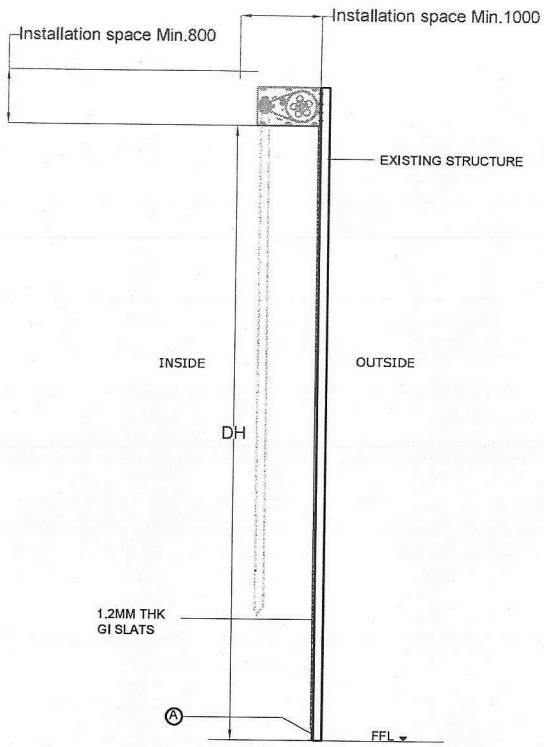


SIDE VIEW

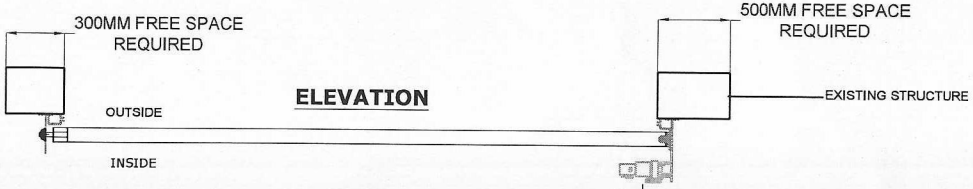

ELEVATION

PLAN

INDIRECT DRIVE MOTOR WITH CHAIN FOR MANUAL OPERATION

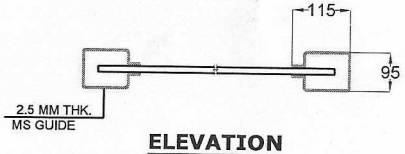

ELEVATION

NOTE:-

1. ALL CIVIL WORK WILL BE IN CLIENT SCOPE.
2. SURFACE FINISH: POWDER COATING OF APPROVED RAL CODE9007 (grey color).
3. MOUNTING: MS STRUCTURE & INSIDE
4. THERE WILL BE JOINT IN MS GUIDE NOT IN SINGLE PIECE.
5. IF MS STRUCTURE REQUIRED FOR ROLLING SHUTTER MOUNTING WILL BE IN CLIENT SCOPE.
6. SAFETY CATCH CONSIDER FOR ABOVE ROLLING SHUTTER
7. WIND LOCK QTY MAY VARY AS PER SHUTTER HEIGHT

Rev.No	Revision	Date	Revised By
4.	Slats material has been changed from MS TO GI	27-02-2023	Sujata
3.	MS Guide has been changed from 150X100X2.5 to 115X95X2.5MM	21-02-2023	Sujata
2.	Honeycomb grill,safety catch and wind lock has been added	15/02/2023	Sujata
1.	Perforated slates dimension/position has been added	21/11/2022	Sujata

TOLERANCE - ±10mm

DW	DH	QTY
8000MM	8500MM	2nos

MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE)

	NAME	DATE
DRAWN	SUJATA	18/10/2022
CHECK	A.K	18/10/2022
APPRD	V.T	18/10/2022

This drawing & design1ing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern

NIHVA

NIHVA TECHNOLOGIES PVT. LTD.

CLIENT - SRUSHTI ASSOCIATES

PROJECT - ROLLING SHUTTER

SITE -PUNE

DWG. NO. -NIHVA/22-23/CLT/0148 | REV.04

SCALE: 01 | WT: | SHEET: 01 OF 01

If any queries contact : design1@nihva.com

MS - Motorized Single Leaf Rolling Shutter - Indirect Drive

Sr .No.	Specification	MS - Motorized Single Leaf Rolling Shutter - Indirect Drive
1	Description:	Motorised Rolling Shutter with MS Slats with thickness of 1 mm.
2	Mounting Location area	Inside area / Outside area
3	Mounting Surface	Side Brackets: Optional = On Concrete /Steel & Side
4	Curtain Panel	The panel made of 1.0mm thick MS.
5	Curtain panel size	75mm wide
6	Curtain Profile	Curved
7	Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	Side Guide Profile	M.S." T" Shaped profile 65 mm -150 mm x 3 mm thick.
9	Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	Side Brackets	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
11	Hood Cover	Made of GI Sheet Thickness 0.9 mm
12	Surface finish	PU paint
13	Drive Unit & Mounting Type	Electric Motor - Indirect Mounting - Sprocket chain arrangement – IP54 Protection

MS - Motorized Single Leaf Rolling Shutter - Indirect Drive

Sr .No.	Specification	MS - Motorized Single Leaf Rolling Shutter - Indirect Drive
1	Description:	Motorised Rolling Shutter with GI Slats with thickness of 1 mm.
2	Mounting Location area	Inside area / Outside area
3	Mounting Surface	Side Brackets: Optional = On Concrete /Steel & Side
4	Curtain Panel	The panel made of 1.0mm thick MS.
5	Curtain panel size	75mm wide
6	Curtain Profile	Curved with Perforated Slats (1000 mm) at height of 1500 mm
7	Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	Side Guide Profile	M.S." T" Shaped profile 65 mm -150 mm x 3 mm thick.
9	Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	Side Brackets	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
11	Hood Cover	Made of GI Sheet Thickness 0.9 mm
12	Surface finish	PU paint
13	Drive Unit & Mounting Type	Electric Motor - Indirect Mounting - Sprocket chain arrangement – IP54 Protection

NIHVA TECHNOLOGIES PVT. LTD.

PDIR CHECKLIST FOR MOTORIZED SL- GATE

Client name	:- Faomso pharma.	NIHVA - PRJ - F - 07
project name	:-	Date :- 21/03/23
quantity	:- 01 Nos	
sliding gate size	:- 10300 (L) x 2100 (H)	

	INSPECTION POINTS	Ok	Not ok
1	outer Tube size (80x80x3.2 Thick)	☑	☐
2	Intermidiate members (80x40x2.6 (thick)	☑	☐
3	welding & grinding quality	☑	☐
4	bracket welding & dimentions	☑	☐
5	support column sizes	☑	☐
6	support column holes sizes	☑	☐
7	perforated sheet sizes	☐ NA	☐
8	Bright bar/ ISMB sizes & length	☑	☐
9	Rollers sizes & quantity	☑	☐
10	Rack/telescopic mechanism	☑	☐
11	Motor,photocell,remote,flishing light	☑	☐
12	Wedge anchor sizes & quantity	☑	☐

Remarks (if any) :-

- Bar / ISMB already sent on site
- Inspection done as per drawing / visual base.

Quality Engineer Name :- Dilip / Sandip Mandavekar

Sign of Quality Engineer :- 21/03

① Photocell 2T - 01 Nos (BFT)
② Rollers 50x50mm - 08 Nos
③ Rack 12x30mm - 11 Nos
④ Photocell (BFT) - 01 pair
⑤ Remote - 01 Nos
⑥ MS wheel - 04 Nos (4")
⑦ Lamp/Push - 01 Nos (each)

WORK ORDER

NIHVA TECHNOLOGIES PVT. LTD.

Client:	
FARMSON PHARMACEUTICAL GUJARAT PRIVATE LIMITED	
Address:	
UNIT-I, PLOT NO. 28-35, 40/1&2,,GIDC INDUSTRIAL ESTATE NANDESARI-391340	

PO Number:	FP1/PO/ENG2223/02624	W. O. No-	SO/22-23/074
PO Dated :	25-02-2023	W. O. Date	25-02-2023
PO Received Date:	25-02-2023	Sales Co ordinator	Shailesh
Ref. Quotation:	SQA.22.23.0379R2	Front Sales Person	

Dispatch Address:

FARMSON PHARMACEUTICAL GUJARAT PRIVATE LIMITED
UNIT-I, PLOT NO. 28-35, 40/1&2,,GIDC INDUSTRIAL ESTATE
NANDESARI-391340

A Technical Terms:

Sr. No	Description of Goods	Technical Details	UOM	Qty.	Supply Rate	Installation Rate	Total Amount	Dwg. Approval Status
1	Motorized Single Leaf Sliding Gate W 9000 mm X H 2100 mm	Sheet 2	No	1			0	Pending
						Total	0	

Non standard items/extra requirement, if any:	

B Commerical Terms:

1	Payment Terms:	70 % Against Proforma Invoice against readiness for Dispatch; 30% After successful commissioning		
2A	Delivery Date as per PO:	WITHIN 3 WEEKS OR EARLIER.	2B. Required Delivery Date:	
3A	Transportation Scope:	NIHVA Scope	3B. Transportation Charges:	
4	P&F Charges:	NIL		
5A	Loading Scope:	NIHVA Scope	5B. Loading Charges:	
6A	Unloading Scope:	CLIENT Scope	6B. Unloading Charges:	
7A	Lifting Equipments Scope:	CLIENT Scope	7B. Available Lifting Equipments:	
8	Warranty:	12 months from the date of supply.		
9A	Height arrangement Scope:	CLIENT Scope	9B. Available Equipments for working at Site:	
10	Electricity Supply:	CLIENT Scope		
11	GST:	18%		
12A	Installation Scope:	NIHVA Scope	12B. Installation required date:	
13	Mode of import:	NA		
14	HSS:	NA		
15	Documentation Required:	Standard Handover Documents		
16A	Total site visits required:		16B. Site visit charges:	

Certified that the above work order finalised in presence of:

GM	AGM	SALES	Operation	PROJECT	DESIGN	Date & Time
Mr. Ameet Kurhade		Mr. Shailesh	Mr. Kiran M	Mr. Sandip	Ms. Sujata Biradar	28-02-2023

Motorized Single Leaf Sliding Gate

Sr.No.	Specification	Motorized Single Leaf Sliding Gate
1	Door type	Motorized Sliding Gate
2	Opening Direction	Horizontal - from left to right or reverse
3	Mounting Location area	Inside area
4	Design Pattern	As per images shared.
5	Outer Tube	80 X 80 X 3.2mm MS SQ. TUBE
6	For Post	80 X 80 X 3.2mm MS SQ. TUBE
7	Innear Tube	80 X 40 X 2.6mm MS SQ. TUBE
8	Gap Between Tubes	125mm
9	Bottom Rail on ground	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
10	Bottom Rollers	Heavy Duty Bottom Wheel With both side Bearings (chorme plated)
11	Guide Rollers supporter	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
12	Painting	QD Paint & QD Primer
13	El motor make	(100% imported)
14	Emergency Operation	Manual after turn the switch
15	Operating Switch	Push Button from inside
16	Safety	Photocells, Flashing Light
17	Civil work	Client scope – client need to grout the I beam in concrete to create track for sliding gate

NIHVA TECHNOLOGIES PVT. LTD. PUNE

NIHVA TECHNOLOGIES PVT. LTD.

PDIR CHECKLIST FOR MOTORIZED SL- GATE

Client name	:- ~~Famson~~ Poonam Rolls	NIHVA - PRJ - F - 07
project name	:-	Date :- 21/03/23
quantity	:- 01 Nos	
sliding gate size	:- 13028 (L) x 1800 (H)	

	INSPECTION POINTS	Ok	Not ok	
1	outer Tube size (72X72X3.2(Thick)	✓		
2	Intermidiate members (30X30 X 2.6 (thick)	✓		
3	welding & grinding quality	✓		
4	bracket welding & dimentions	✓		
5	support column sizes	✓		
6	support column holes sizes	✓		
7	perforated sheet sizes			NA
8	Bright bar/ ISMB sizes & length	✓		
9	Rollers sizes & quantity	✓		
10	Rack/telescopic mechanism	✓		
11	Motor,photocell,remote,flishing light	✓		
12	Wedge anchor sizes & quantity	✓		

Remarks (if any) :-

- Inspection done as per drawing & visual basis.

Quality Engineer Name :- Sandip Madavade

Sign of Quality Engineer :- 21/03/23

(1) Metal Slice - 1800 Kg
(2) Rollers 50X50 mm - 08 Nos
(3) Rack 12X30 mm - 15 Nos
(4) Photocell pair - 01 Nos
(5) Remote & Receiver - 01 pair
(6) MS wheel - 02 Nos (4")
(7) Lamp/Push - 01 Nos (each)

Cable - 6 core - 15 mts
- 2 core - 16 mts


ISMB - 28 mts (100X50 mm)
base - 28 mts (20 mm)

Motorized Single Leaf Sliding Gate with MS sheet of 1.6mm


Sr .No.	Specification	Motorized Single Leaf Sliding Gate with MS sheet of 1.6mm
1	Door type,Size	Motorized Single Leaf Sliding Gate (L) 13028 mm x (H) 1800mm
2	Opening Direction	Horizontal - from left to right or reverse
3	Mounting Location area	Inside area
4	Design Pattern	As per Design Provided
5	Outer Tube	72 X 72 X 3.2mm MS SQ. TUBE
6	For Post	72 X 72 X 3.2mm MS SQ. TUBE
7	Innear Tube	32 X 32 X 2.6mm MS SQ. TUBE
8	Gap Between Tubes	125mm
9	Bottom Rail on ground	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
10	Bottom Rollers	Heavy Duty Bottom Wheel With both side Bearings (chorme plated)
11	Guide Rollers supporter during Gate movement	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
12	Painting	QD Paint & QD Primer
13	El motor make	(100% imported)
14	Emergency Operation	Manual after turn the switch
15	Operating Switch	Push Button from inside
16	Safety	Photocells, Flashing Light
17	Civil work	Client scope – client need to grout the I beam in concrete to create track for sliding gate

Manual Single Leaf Wicket Gate with MS sheet of 1.6mm

Sr .No.	Specification	Manual Single Leaf Wicket Gate with MS sheet of 1.6mm
1	Door type	Manual Single Leaf Wicket Gate
2	Size considered	Clear opening - (W)1500 mm x (H)1800 mm
3	Mounting Location area	Inside area
4	Design Pattern	Standard Tubular Design Pattern
5	Outer Frame Tube Sizes	72 X 72 X 3.2mm MS SQ. TUBE
6	Internal Vertical Tube Sizes	32 X 32 X 2.6mm MS SQ. TUBE
7	Painting	QD Paint & QD Primer
8	Operation	Manually Opening

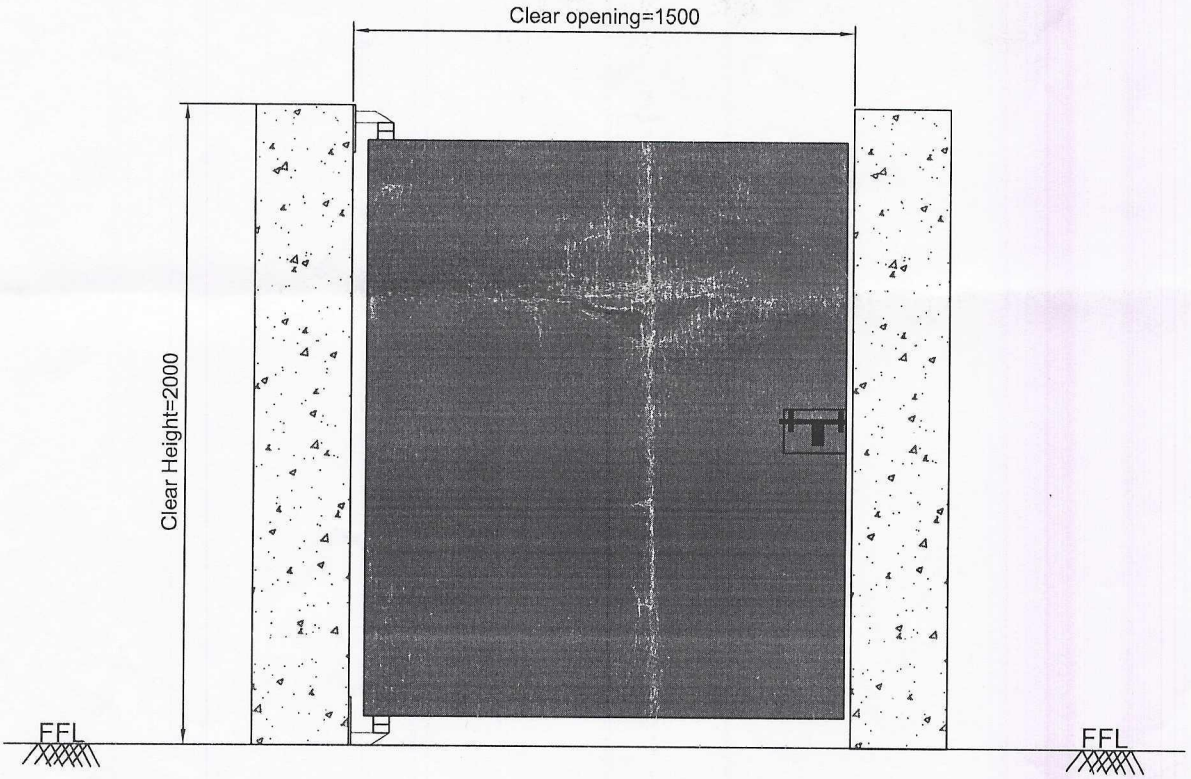

view from outside

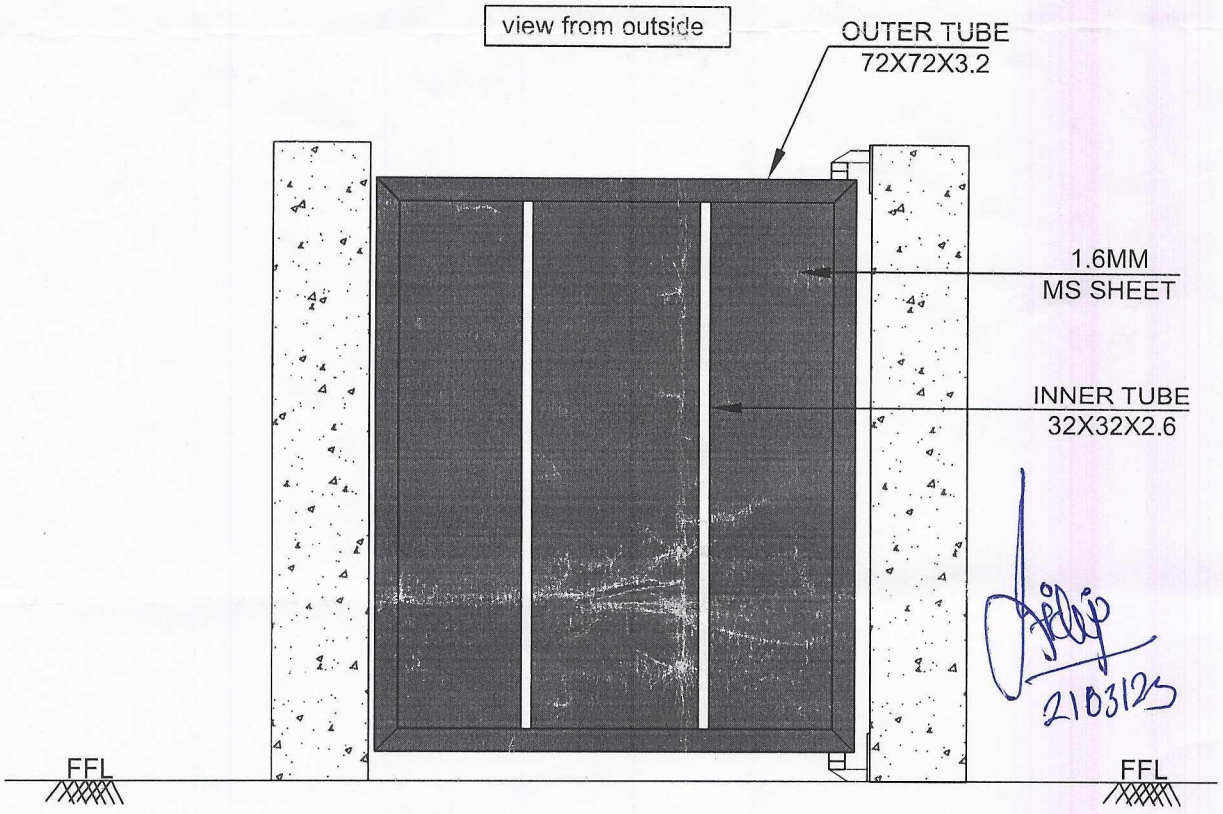

2103123

view from inside

Note:-

1.All Dimension are in MM.
2.Civil,Installation and Fabrication Tolerance will be ±20mm
3.Surface Finish(painting): Approved RAL

Rev No.	Revision	Date	Revised By

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE:- WICKET GATE

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	SIGN
DRAWN	NIRMALA	20/01/2023	
CHECK	A.K	20/01/2023	
APPRD.	V.T	20/01/2023	

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

CLIENT -Poonam Roller Flour Mill

LOCATION -

PRODUCT - Wicket Gate | QTY:-

DWG NO:-NIHVA/22-23/CLT/00179_1 | REV- 00

SCALE: NTS | SCALE:-- 1:1 | SHEET: 01 OF 01

Pre Despatch Inspection Report of Dock Leveller

NIHVA TECHNOLOGIES PVT. LTD.

Site Name L & T

Dock Leveler Qty. :- 02

Date :- 15/03/23

Sr. No.	Description	Specification	Observation
1	Capacity	6 Ton	
2	Dock operation mode	AC Power pack hydraulically operated	[Flame proof]
3	Lip Operation mode	Hydraulic	
4	Operation control	Through Panel	flame proof panel
5	Loading platform height from road	~~1250~~ mm Aprox. 900mm	
6	Travel above & below dock level	(+) 300 / (-) 250 mm	
7	Platform size	(w) 1820 mm x (L) 5000mm	
8	Lip size	(w x L) 1620 X 400 mm	
9	Shut Height	300 mm	
10	Working Length	1200 mm	
11	Overall Length	3000 + Lip Length(400)	
12	Diagonal Length	mm	
13	Maximum slope can be achieved	10%	
14	Clear pit dimensions (W X L X D)	1870X5100X650 (100X150)	
15	Hydralic power pack	Standred	
16	Driver Type	Direct by electric Motor	
17	Motor Rating	1 H.P. SIEMENS Make	
18	Pump Type	Gear	
19	Release Valve	Integrel Make	
20	Solenoid Valve	Yuken	
21	NRV	2 nos.	
22	Valume of oil receiver	7 Ltr.	
23	No of Dock Cylinder	2 nos.	
24	Lip Cylinder	1 no.	
25	Hydralic Hose Length	5 mtrs (1 Pair)	
26	Oil leakage from cylinder/ Hose/Joint	No	
27	Painting Issue	OK	
28	Finishing / Spatter	OK	
29	Chequared Plate bending Issue	OK	
30	Side guard movement	OK	
31	Oil level Indicator - Level Identification	OK	
32	Dock Leveler speed / Lip speed	Std	

Remarks (If any) :-


1. Control panel cable lug & ferrule missing
2. push button control station naming same (lip & platform)
3. mechanical stoppers
4. Control Panel gland missing.

For NIHVA TECHNOLOGIES PVT. LTD.


Dilip Mandivade
15/03/23

Rohit Pawar
15/03/23


TOLERANCE :- ± 10mm

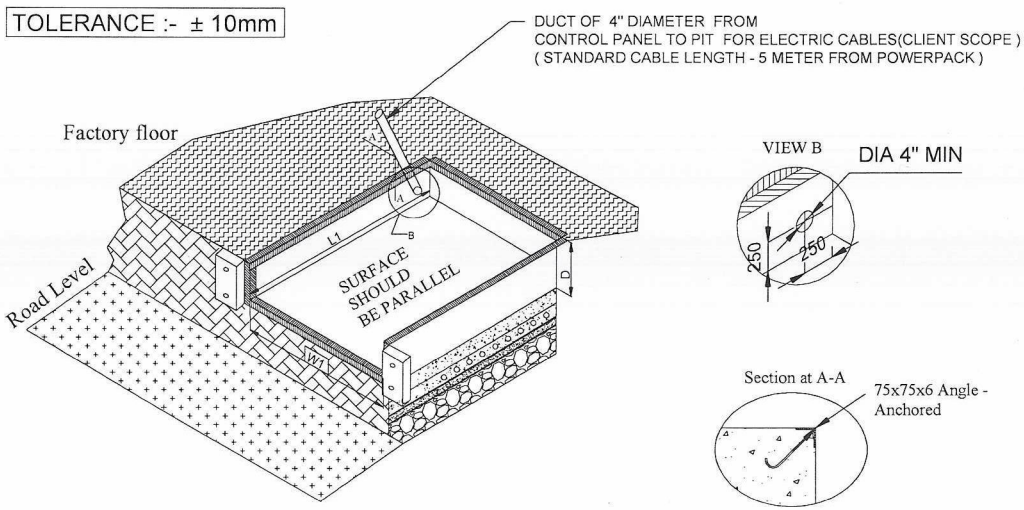


PIT DRAWING (CLIENT SCOPE)

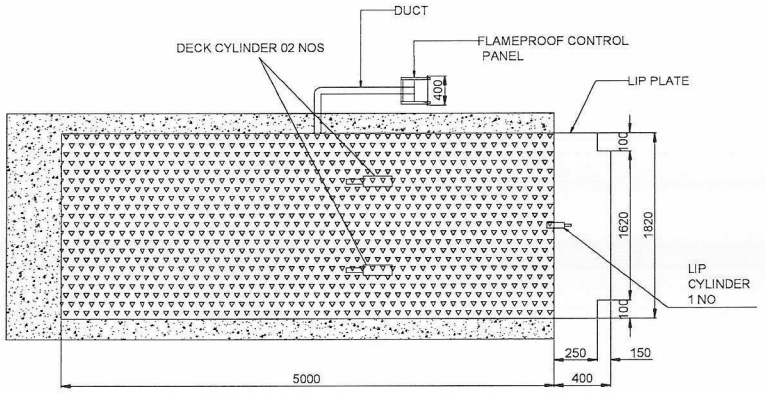

DOCK LEVELER TOP VIEW

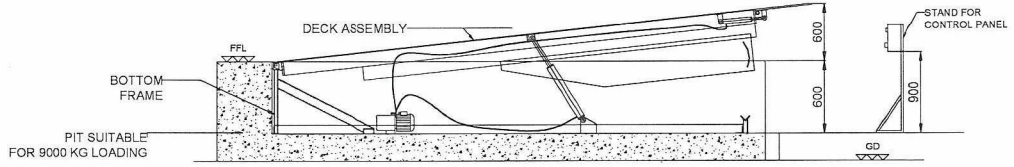

DOCK LEVELER LIP UP FRONT VIEW

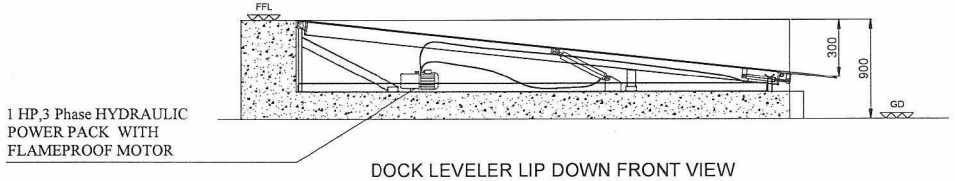


DOCK LEVELER LIP DOWN FRONT VIEW

SPECIFICATIONS OF DOCK LEVELER		
SR NO	PARAMETER	REMARK
1	TYPE OF DOCK LEVELER	PIT MOUNTED HYDRO-ELECTRIC DOCK LEVELER
2	CAPACITY	6 TON
3	DECK OPERATION	LIFTING BY HYDRAULIC CYLINDER
4	LIP OPERATION	OPERATED BY HYDRAULIC CYLINDER
5	OPERATION CONTROL	BY PUSH BUTTONS ON CONTROL PANEL
6	CHEQUERED PLATFORM SIZE	1820 MM (W) X 5000 MM (L)
7	DOCK HEIGHT	600 MM
8	LIP UP (+)	600 MM
9	LIP DOWN (-)	300 MM
10	PLAIN TOP LIP SIZE	1820 MM (W) X 400 MM (L)
11	LEVEL OF FACTORY FLOOR FROM GROUND	900 MM
12	PIT SIZE	1870MM (W) X 5100 MM (L) X 605 MM (H)
13	MATERIAL OF CONSTRUCTION	MILD STEEL
14	PAINT	FIROZI BLUE
15	QTY	2 NOS

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE.
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM).
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 9000 KG FLOOR LOADING .
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING.
5. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE + 10 MM.
6. DOCK LEVELER CAPACITY IS OF 6 TON AFTER RESTING OF LIP ON DOCK LEVELER.
7. CYLINDERS PROVIDED ARE USED ONLY FOR LIFTING OF BARE DOCK (NO LOAD ON DECK) & CAN NOT LIFT DECK IN LOADED CONDITION WITH OTHER LOADS.
8. REQUIRED DUCT , BOLT FOR ANCHORING ANGLE , PIT & ALL CIVIL WORK IS IN CLIENT SCOPE.
9. ALL STRUCTURE PAINT COLOR IS FIROZI BLUE AS PER STANDARD & OTHER BOUGHTOUT COLOUR WILL BE AS PER ORIGINAL EQUIPMENT MANUFACTURER STANDARD .

Dilip 15/03

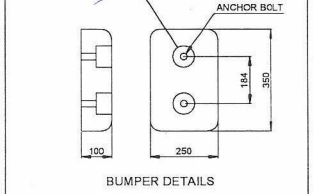

BUMPER DETAILS

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPER SIZE
	1820	5000	600	400	250X350X100

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	1870	5100	605	

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER - 6 TON

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

	NAME	SIGN	DATE
DRAWN	S.M.S.		13.2.2021
CHECK	A.K.		12.2.2021
APPRD.			

CLIENT - L & T HYDRO CARBON ENGG. LIMITED
PROJECT - HPCL RUF
SITE LOCATION - VISAKHAPATNAM
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/20-21/0157 REV- R00
ALL DIMENSION ARE IN mm
SCALE: NTS WT: SHEET: 01 OF 01