

DRAWING

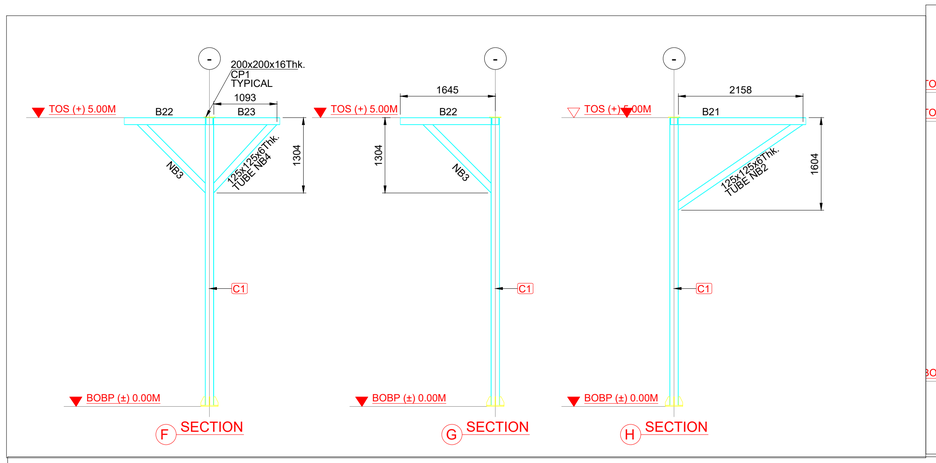


F SECTION

G SECTION

H SECTION

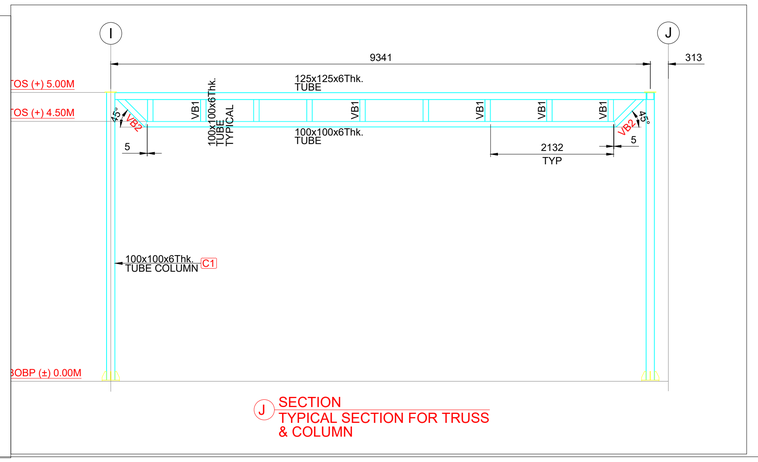


J SECTION
TYPICAL SECTION FOR TRUSS
& COLUMN

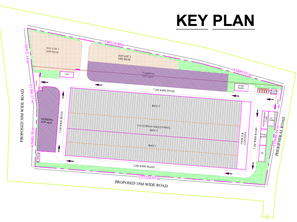


KEY PLAN


MTO FOR FLOOR AT 5.00M LEVEL							
ITEM No.	DESCRIPTION	WD. mm	LG. mm	UNIT WT. (kg/m)	QTY.	WEIGHT IN kg.	
						UNIT	TOTAL
B1	125x125x6Thk.		8380.00	21.69	10	181.76	1817.62
B1A	125x125x6Thk.		8365.00	21.69	1	181.44	181.44
B1B	125x125x6Thk.		7545.00	21.69	1	163.65	163.65
B2	125x125x6Thk.		8390.00	21.69	2	181.98	363.96
B3	125x125x6Thk.		7570.00	21.69	2	164.19	328.39
B4	125x125x6Thk.		9515.00	21.69	1	206.38	206.38
B6	100X100X6Thk.		5000.00	16.98	2	84.90	169.80
B7	75X75X6Thk.		2095.00	12.70	15	26.61	399.10
B8	75X75X6Thk.		1870.00	12.70	15	23.75	356.24
B9	125x125x6Thk.		2345.00	21.69	1	50.86	50.86
B10	125x125x6Thk.		2205.00	21.69	1	47.83	47.83
B11	125x125x6Thk.		7675.00	21.69	8	166.47	1331.77
B12	100X100X6Thk.		2940.00	16.98	28	49.92	1397.79
B13	75X75X6Thk.		900.00	12.70	96	11.43	1097.28
B14	75X75X6Thk.		950.00	12.70	15	12.07	180.98
B15	75X75X6Thk.		785.00	12.70	15	9.97	149.54
B16	75X75X6Thk.		2040.00	12.70	16	25.91	414.53
B16A	75X75X6Thk.		1135.00	12.70	34	14.41	490.09
B17	75X75X6Thk.		485.00	12.70	17	6.16	104.71
B18	75X75X6Thk.		1285.00	12.70	34	16.32	554.86
B19	75X75X6Thk.		1030.00	12.70	17	13.08	222.38
B20	75X75X6Thk.		1455.00	12.70	17	18.48	314.13
B21	75X75X6Thk.		2110.00	12.70	28	26.80	750.32
B21A	125x125x6Thk.		2155.00	21.69	2	46.74	93.48
B22	125x125x6Thk.		600.00	21.69	2	13.01	26.03
B23	125x125x6Thk.		1250.00	21.69	2	27.11	54.23
B24	125x125x6Thk.		1400.00	21.69	2	30.37	60.73
B25	125x125x6Thk.		1250.00	21.69	2	27.11	54.23
B26	125x125x6Thk.		1400.00	21.69	2	30.37	60.73
B27	125x125x6Thk.		1143.00	21.69	2	24.79	49.58
B28	125x125x6Thk.		1570.00	21.69	2	34.05	68.11
B29	125x125x6Thk.		9555.00	21.69	5	207.25	1036.24
B30	125x125x6Thk.		8049.00	21.69	5	174.58	872.91
B31	125x125x6Thk.		8100.00	21.69	5	175.69	878.45
B32	125x125x6Thk.		6150.00	21.69	8	133.39	1067.15
B33	125x125x6Thk.		8075.00	21.69	8	175.15	1401.17
B34	125x125x6Thk.		5525.00	21.69	8	119.84	958.70
						TOTAL	17775.37

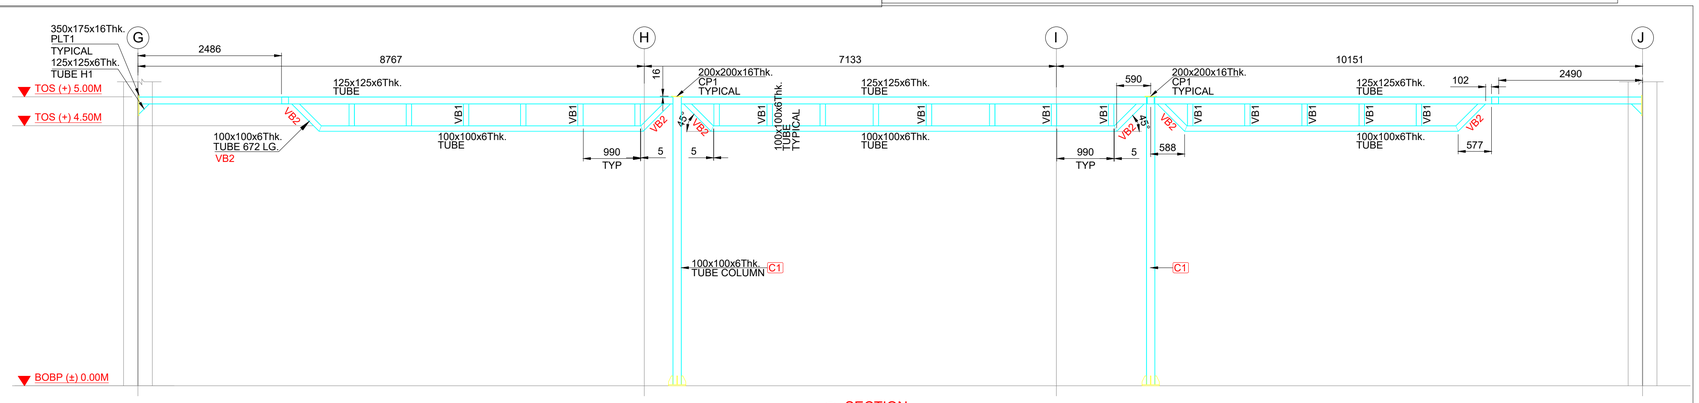

B SECTION
TYPICAL SECTION FOR TRUSS
& COLUMN

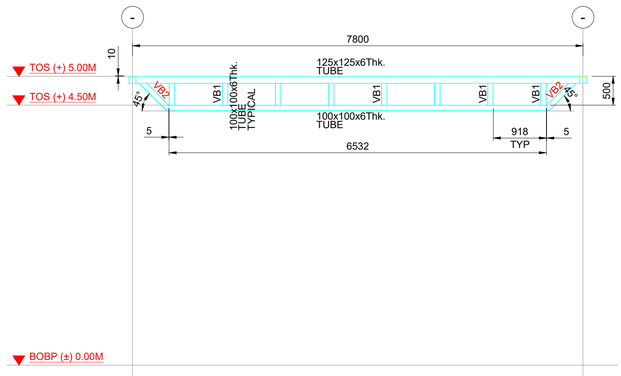

A SECTION
TYPICAL SECTION FOR TRUSS
& COLUMN

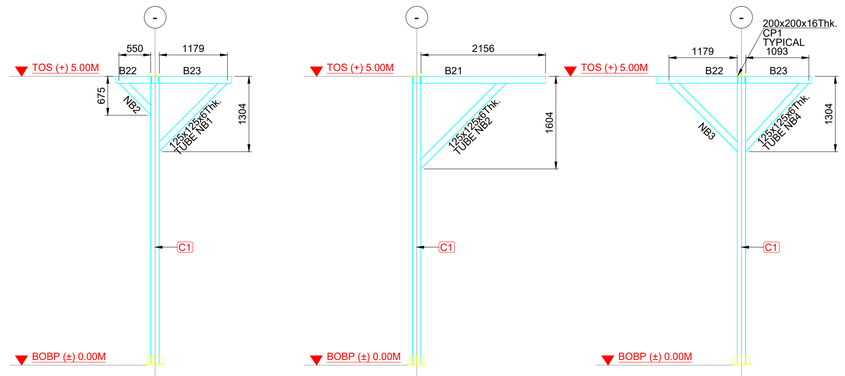

C SECTION

D SECTION

E SECTION

F SECTION

G SECTION

MTO FOR GRID 20 TO GRID 24 & PLAN AT 4.50M LEVEL							
ITEM No.	DESCRIPTION	WD. mm	LG. mm	UNIT WT. (kg/m)	QTY.	WEIGHT IN kg.	
						UNIT	TOTAL
B1	100X100X6Thk.		6625.00	16.98	10	112.49	1124.93
B1A	100X100X6Thk.		6625.00	16.98	1	112.49	112.49
B1B	100X100X6Thk.		6625.00	16.98	1	112.49	112.49
B2	100X100X6Thk.		6625.00	16.98	2	112.49	224.99
B3	100X100X6Thk.		6625.00	16.98	2	112.49	224.99
B4	100X100X6Thk.		6165.00	16.98	1	104.68	104.68
B6	100X100X6Thk.		4000.00	16.98	2	67.92	135.84
B11	100X100X6Thk.		6625.00	16.98	8	112.49	899.94
B21A	125x125x6Thk.		2155.00	21.69	2	46.74	93.48
B29	125x125x6Thk.		8555.00	21.69	1	185.56	185.56
B30	125x125x6Thk.		7049.00	21.69	1	152.89	152.89
B31	125x125x6Thk.		7100.00	21.69	5	154.00	770.00
B32	125x125x6Thk.		4735.00	21.69	8	102.70	821.62
B33	125x125x6Thk.		7025.00	21.69	8	152.37	1218.98
B34	125x125x6Thk.		5605.00	21.69	8	121.57	972.58
						TOTAL	7155.45

MTO FOR COLUMN							
ITEM No.	DESCRIPTION	WD. mm	LG. mm	UNIT WT. (kg/m)	QTY.	WEIGHT IN kg.	
						UNIT	TOTAL
C1	150x150x6Thk.		4980.00	26.40	13	131.47	1709.14
BP-1	20 thk pl.	300	300.00	157.00	13	14.13	183.69
STF-1	10 thk pl.	75	150.00	78.50	52	0.88	45.92
CP-1	16 thk pl.	200	200.00	125.60	13	5.02	65.31
						TOTAL	2004.06

MTO FOR VERTICAL BRACING							
ITEM No.	DESCRIPTION	WD. mm	LG. mm	UNIT WT. (kg/m)	QTY.	WEIGHT IN kg.	
						UNIT	TOTAL
VB1	100X100X6Thk.		375.00	16.98	408	6.37	2597.94
VB2	100X100X6Thk.		672.00	16.98	110	11.41	1255.16
						TOTAL	3853.10

MTO FOR END PLAN & EXTRA MEMBER							
ITEM No.	DESCRIPTION	WD. mm	LG. mm	UNIT WT. (kg/m)	QTY.	WEIGHT IN kg.	
						UNIT	TOTAL
PLT1	16 thk pl.	175	350.00	125.60	11	7.69	84.62
H1	125x125x6Thk.		250.00	21.69	11	5.42	59.65
NB1	125x125x6Thk.		1668.00	21.69	2	36.18	72.36
NB2	125x125x6Thk.		778.00	21.69	3	16.87	50.62
NB2A	125x125x6Thk.		2092.00	21.69	2	45.38	90.75
NB3	125x125x6Thk.		1668.00	21.69	6	36.18	217.07
NB4	125x125x6Thk.		1608.00	21.69	4	34.88	139.51
						TOTAL	714.59

TITLE - ROOF AUTOMATION				NIHVA TECHNOLOGIES PVT.LTD.PUNE	
DWG NO - NTPL- 401-PM-01				Website - www.nihva.com	
	NAME	SIGNATURE	DATE	PRODUCT – BASE STRUCTURE VWM-HWM & SPA	
DRAWN	V.W.		09-06-2026	LOCATION - HYDERABAD	REVISION - 00
CHK'D	S.P.		10-09-2026	CLIENT- NEOTRAFO SOLUTIONS PVT. LTD.	
APPV'D	V.T.		10-09-2026		
IF ANY QUERIES CONTACT - info@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN 'MM'		A1			SHEET 1 OF 1