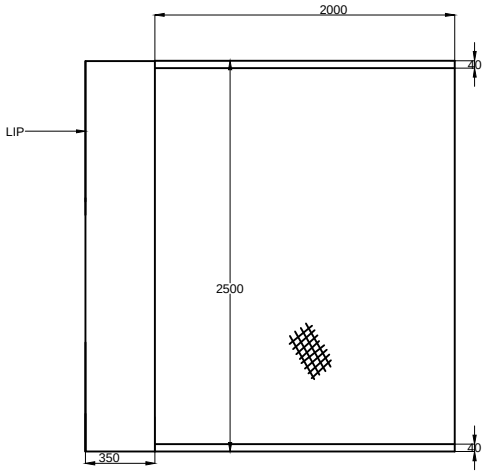

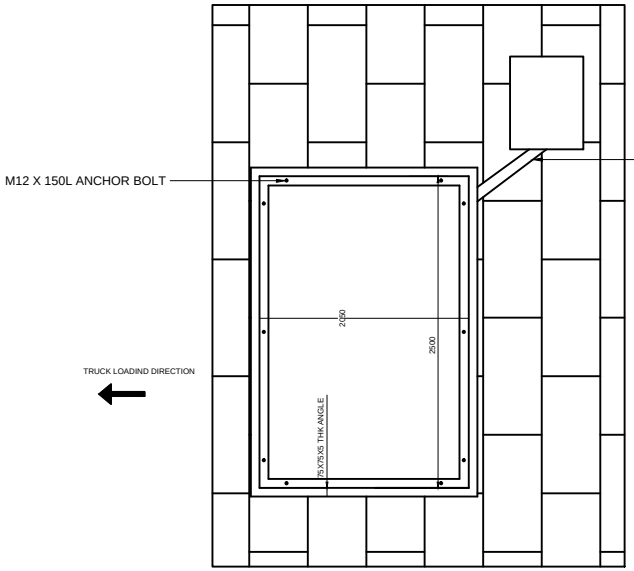

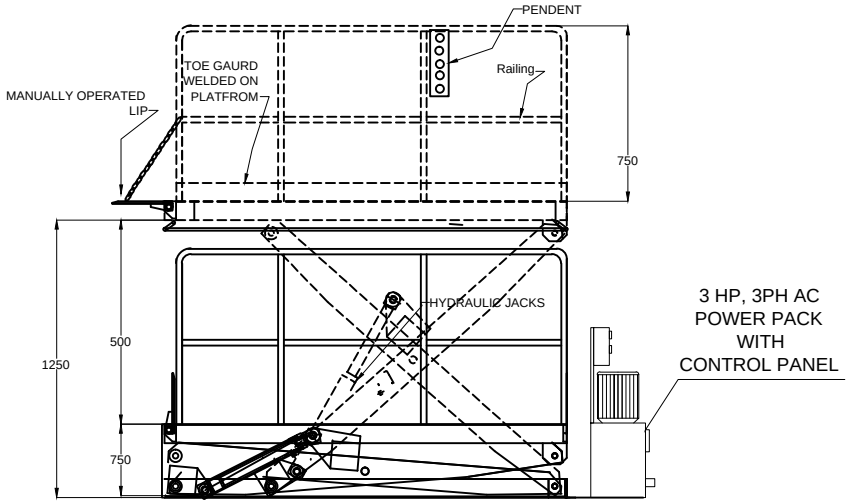

NOTE :
1. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
2. COVERING REQUIRED FOR HOSES AND CABLES AND RELATED CIVIL WORK IS IN CLIENTS SCOPE

Specifications			
Dimensions	Equipment		Scissors Lift
	Rated Capacity	W Kgs	1000
	Platform Length	mm	2500
	Width	mm	2000
	Overall Length	mm	2150
	Width	mm	2000
	Lip One side	mm	350 x2480X 8
	Lip Operation		Manual
	Lip Type		Single
	Speed Lifting/Lower		3-4 / 2-3
	Heights Closed	mm	750
	Lift	mm	500
Drive	Lift Motor 3 Ph AC	H.P.	3
	Pendent		1 Nos
	Lift & Lower cut-off - Yes supply hose - 3.5 m/ Cable - 5m Colour - RAL 7045		

NOTE :
1. HYDRAULIC HOSE LENGTH FROM POWERPACK TO OPENING : 5 MTR
2. ELECTRICAL CABLE FROM CONTROL PANEL TO OPENING : 5 MTR
3. COLOR : RAL 7045
4. INPUT SUPPLY : 3 PHASE 400 VOLT WITH NEUTRAL NEAR POWER PACK LOCATION.
5. GA DRAWING WITH ALL VIEWS IN SCALE 1:1 TO BE PROVIDED BEFORE MANUFACTURING.
6. OPERATION & MAINTENANCE MANUAL WITH SPARE PARTS LIST TO BE PROVIDED .
7. ALL RAW MATERIAL TEST CERTIFICATES TO BE PROVIDED .
8. INDIVIDUAL TEST CERTIFICATES OF HYDRAULIC CYLINDER & HYDRAULIC POWER-PACK TO BE PROVIDED BY SUPPLIER.
9. LOAD TEST TO BE PROVIDED BEFORE DISPATCH FOR RATED LOAD .
10. WEIGHT OF SCISSOR LIFT : 900 KG APPROX
11. SCISSOR LIFT WILL BE FIXED WITH THE FLOOR BY 10 ANCHOR BOLT.

R01 : CHANGED FROM PIT MOUNTED SCISSOR LIFT TO FLOOR MOUNTED SCISSOR LIFT.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE
FLOOR MOUNTED ELECTRO-HYDRAULIC SCISSOR LIFT

	SIGN	DATE
DRAWN	G.P.	30.8.2021
CHECK	A.K.	30.8.2021
APPROVAL	V.T.	30.8.2021
REV.	01	09.9.2021

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - SEZ BIOTECH
PROJECT - SCISSOR LIFT
SITE - PUNE
DWG. NO. : NIHVA/21-22/225/SL
SCALE: NTS | WT: | SHEET: 01 OF 01