
SCISSOR LIFT- ELECTRO HYDRAULIC TYPE

DATE – 6th AUG 19

METROlabE


COMPLETE ENGINEERING SOLUTION

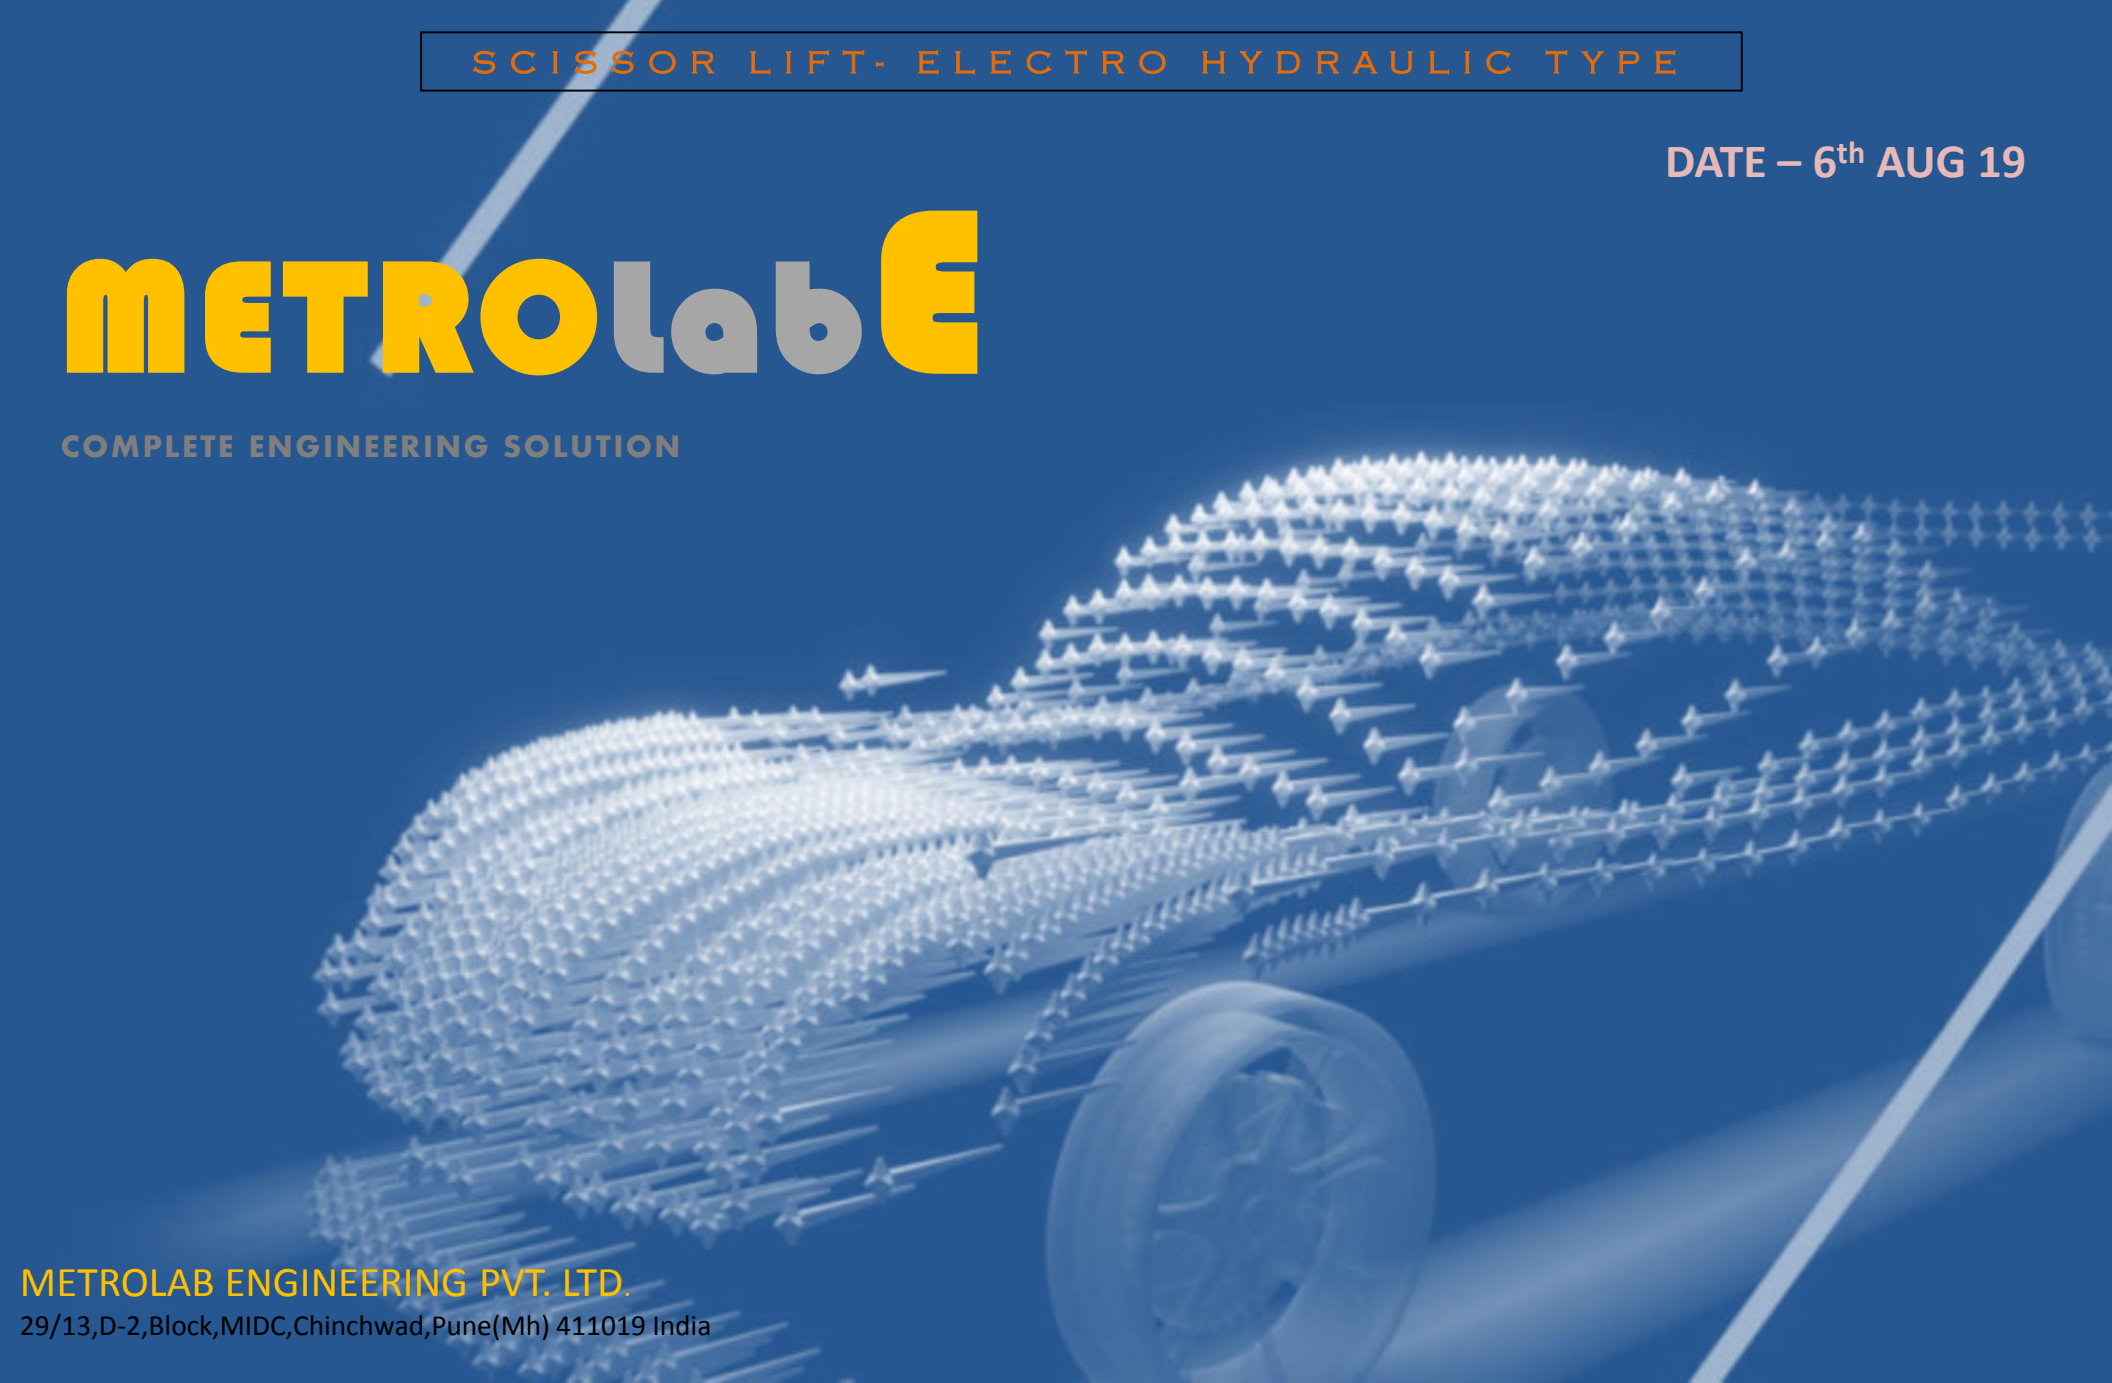

METROLAB ENGINEERING PVT. LTD.
29/13,D-2,Block,MIDC,Chinchwad,Pune(Mh) 411019 India


SCISSOR LIFT- ELECTRO HYDRAULIC TYPE

METRO labE
COMPLETE ENGINEERING SOLUTION

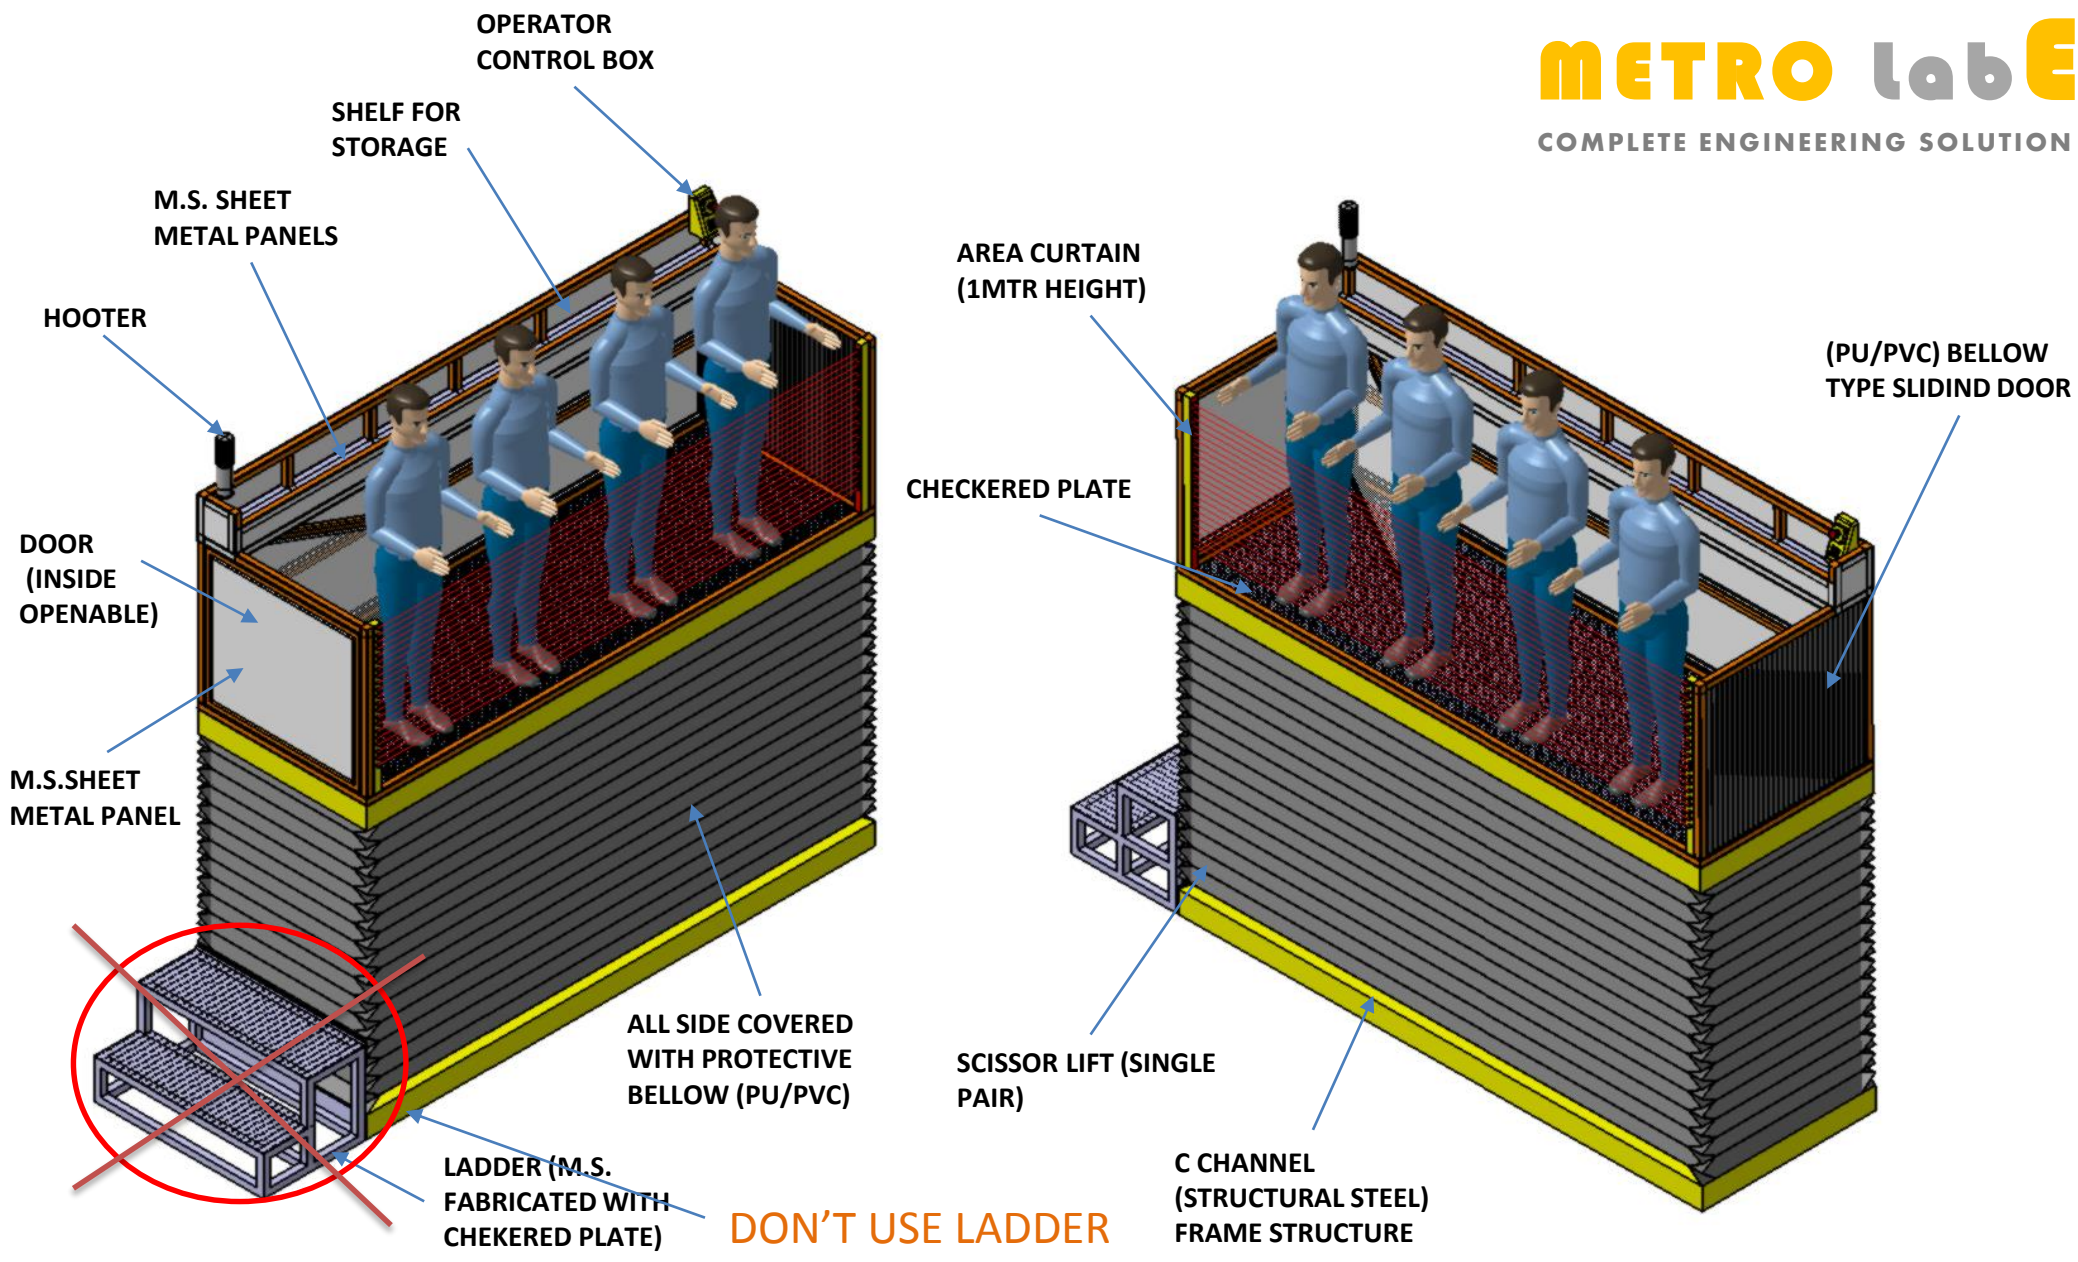

DIMESIONAL DETAILS


METRO labE
COMPLETE ENGINEERING SOLUTION

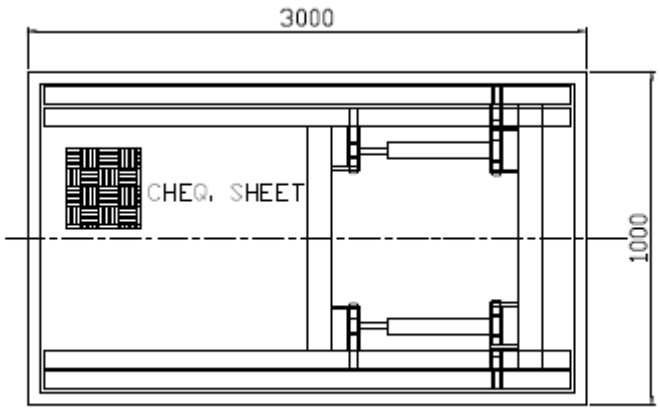


TOP VIEW

SAFETY RAILING	900 MM HT
POWER PACK	3HP, 3PH
MAX HT	1700 MM
LIFT HT	1200 MM
SHUT HT	500 MM
PLATFORM SIZE	3000L x 1000W
CAPACITY	1.3 TON

SHUT UP HEIGHT TO BE ~300mm

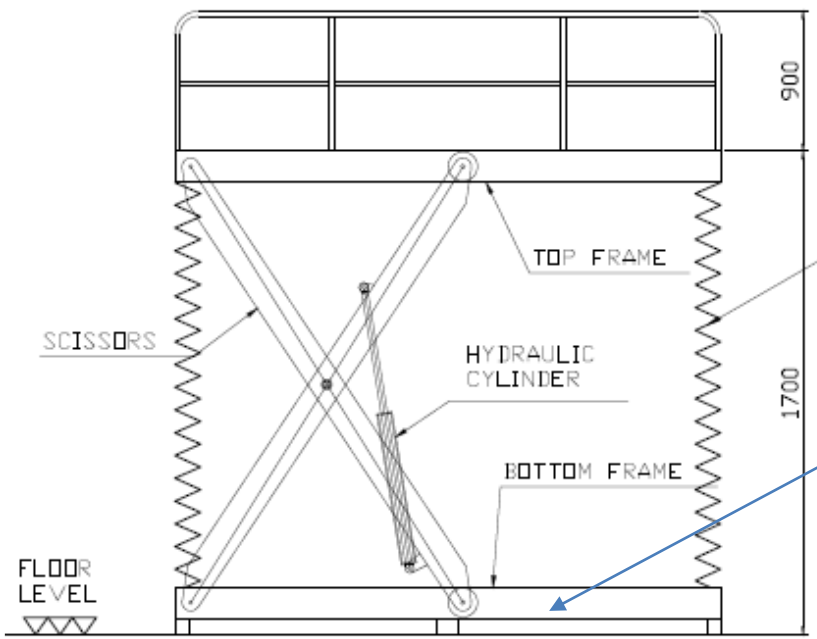

OPEN HEIGHT FRONT VIEW

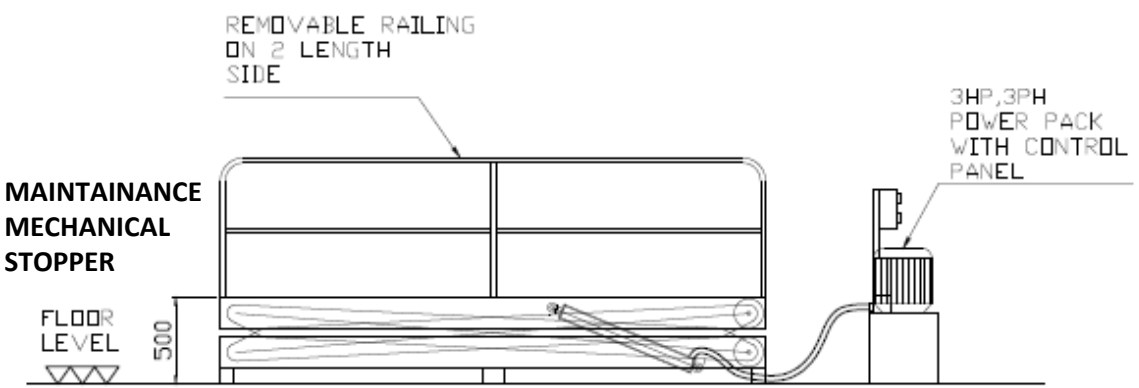


SHUT HEIGHT FRONT VIEW


*** ALL DIMENSIONS ARE IN MM**

DIMESIONAL DETAILS

METRO labE
COMPLETE ENGINEERING SOLUTION


*** ALL DIMENSIONS ARE IN MM**

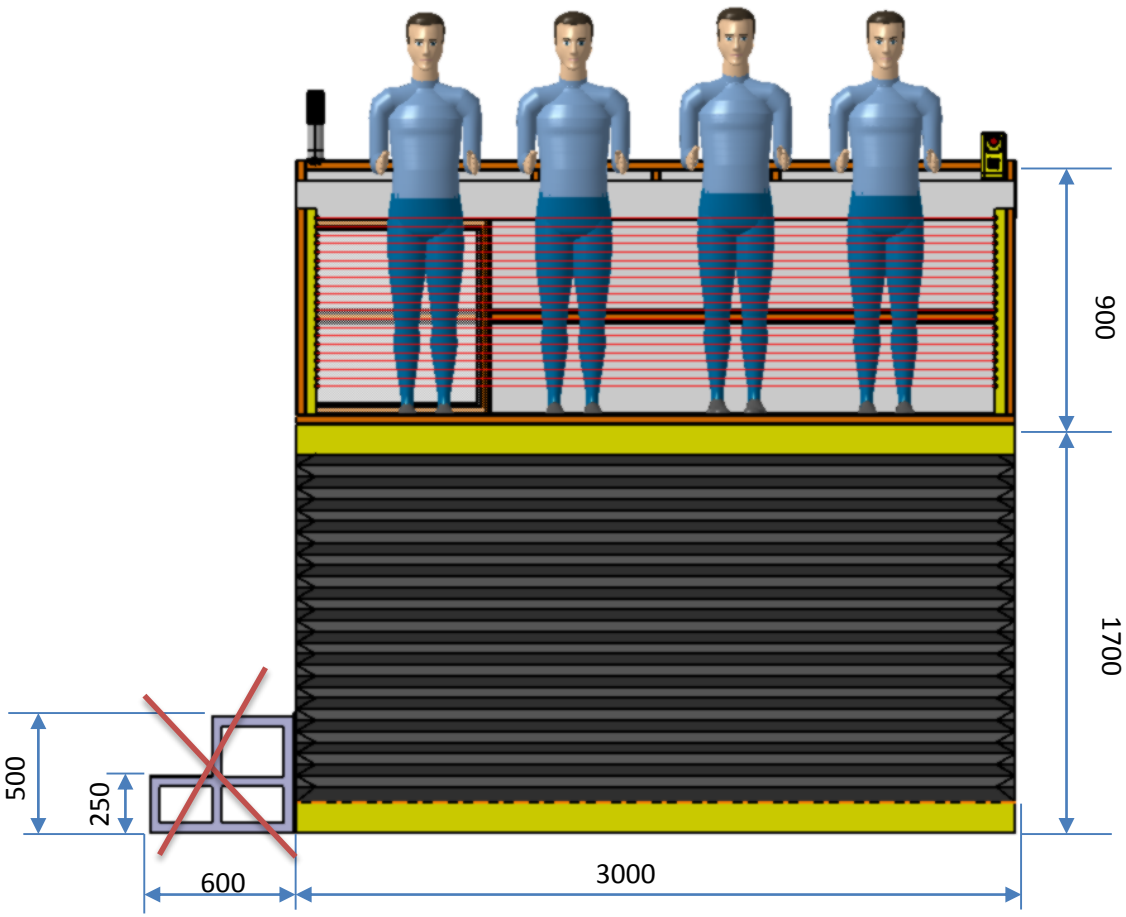


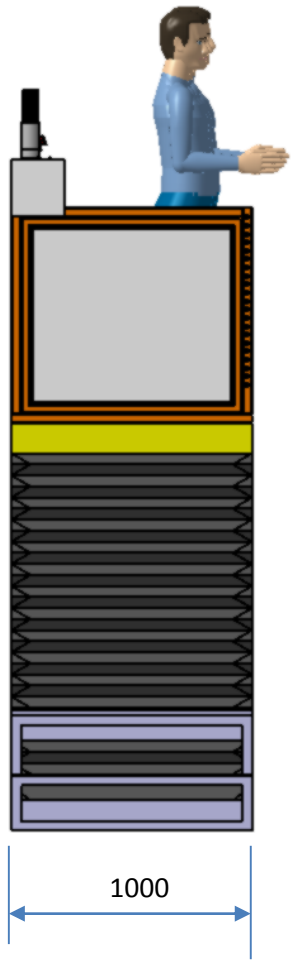

METRO labE
COMPLETE ENGINEERING SOLUTION

LIFT UP & SHUT UP DIMESIONAL DETAILS

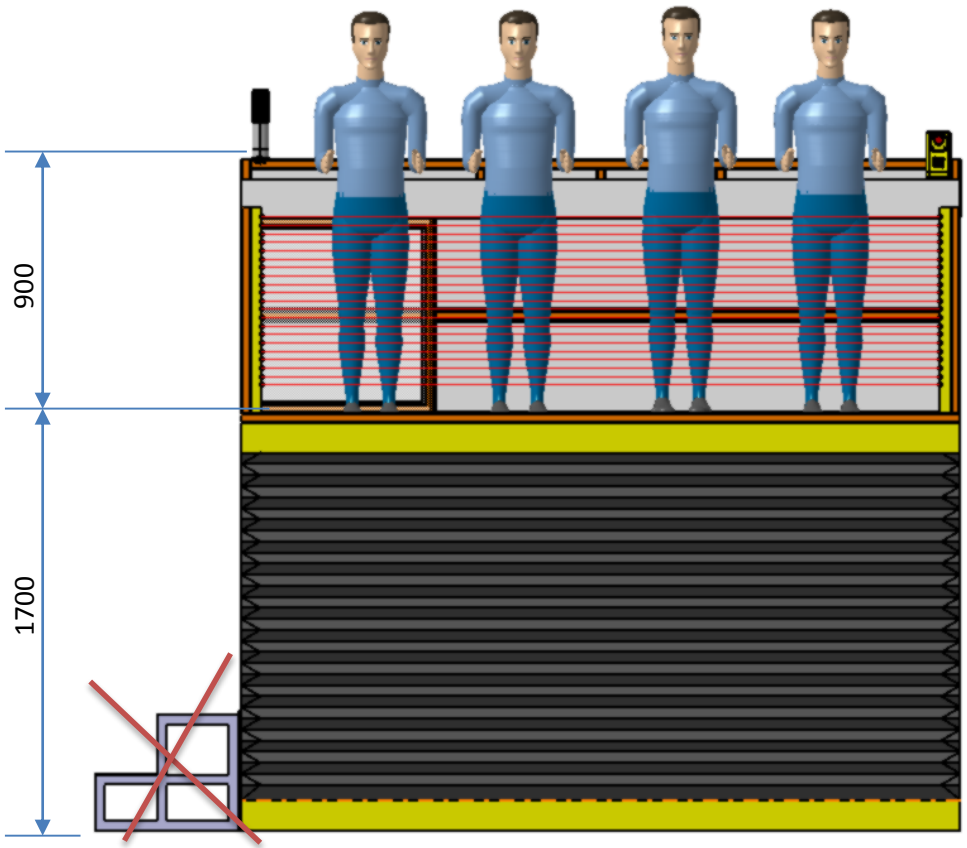

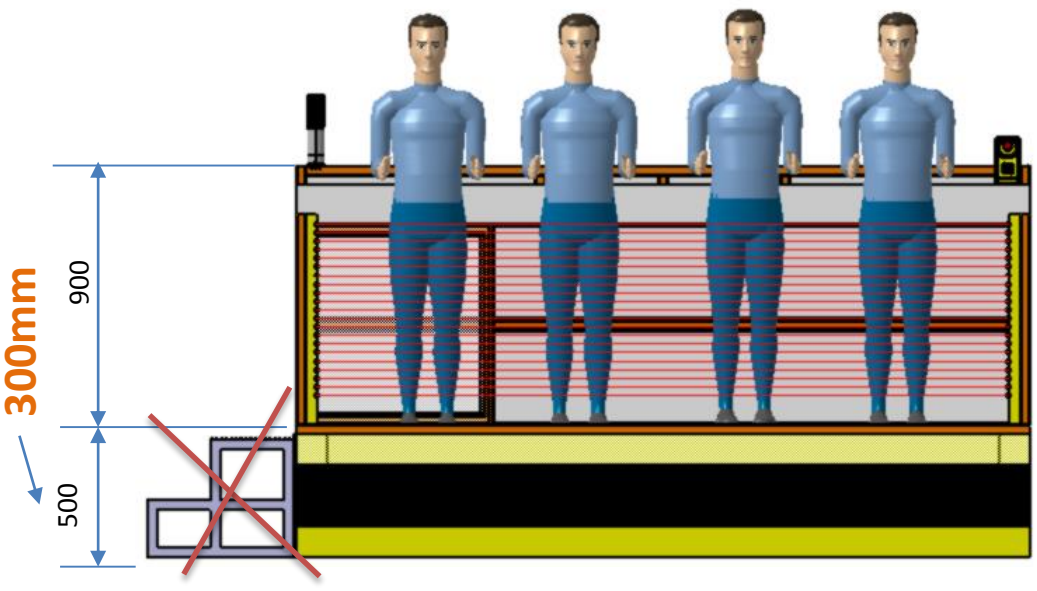


* ALL DIMENSIONS ARE IN MM

LAYOUT PLAN VIEW

METRO labE
COMPLETE ENGINEERING SOLUTION

SHIFT THE POWER PACK & CONTROL PANEL 10-12 MTR OUTSIDE

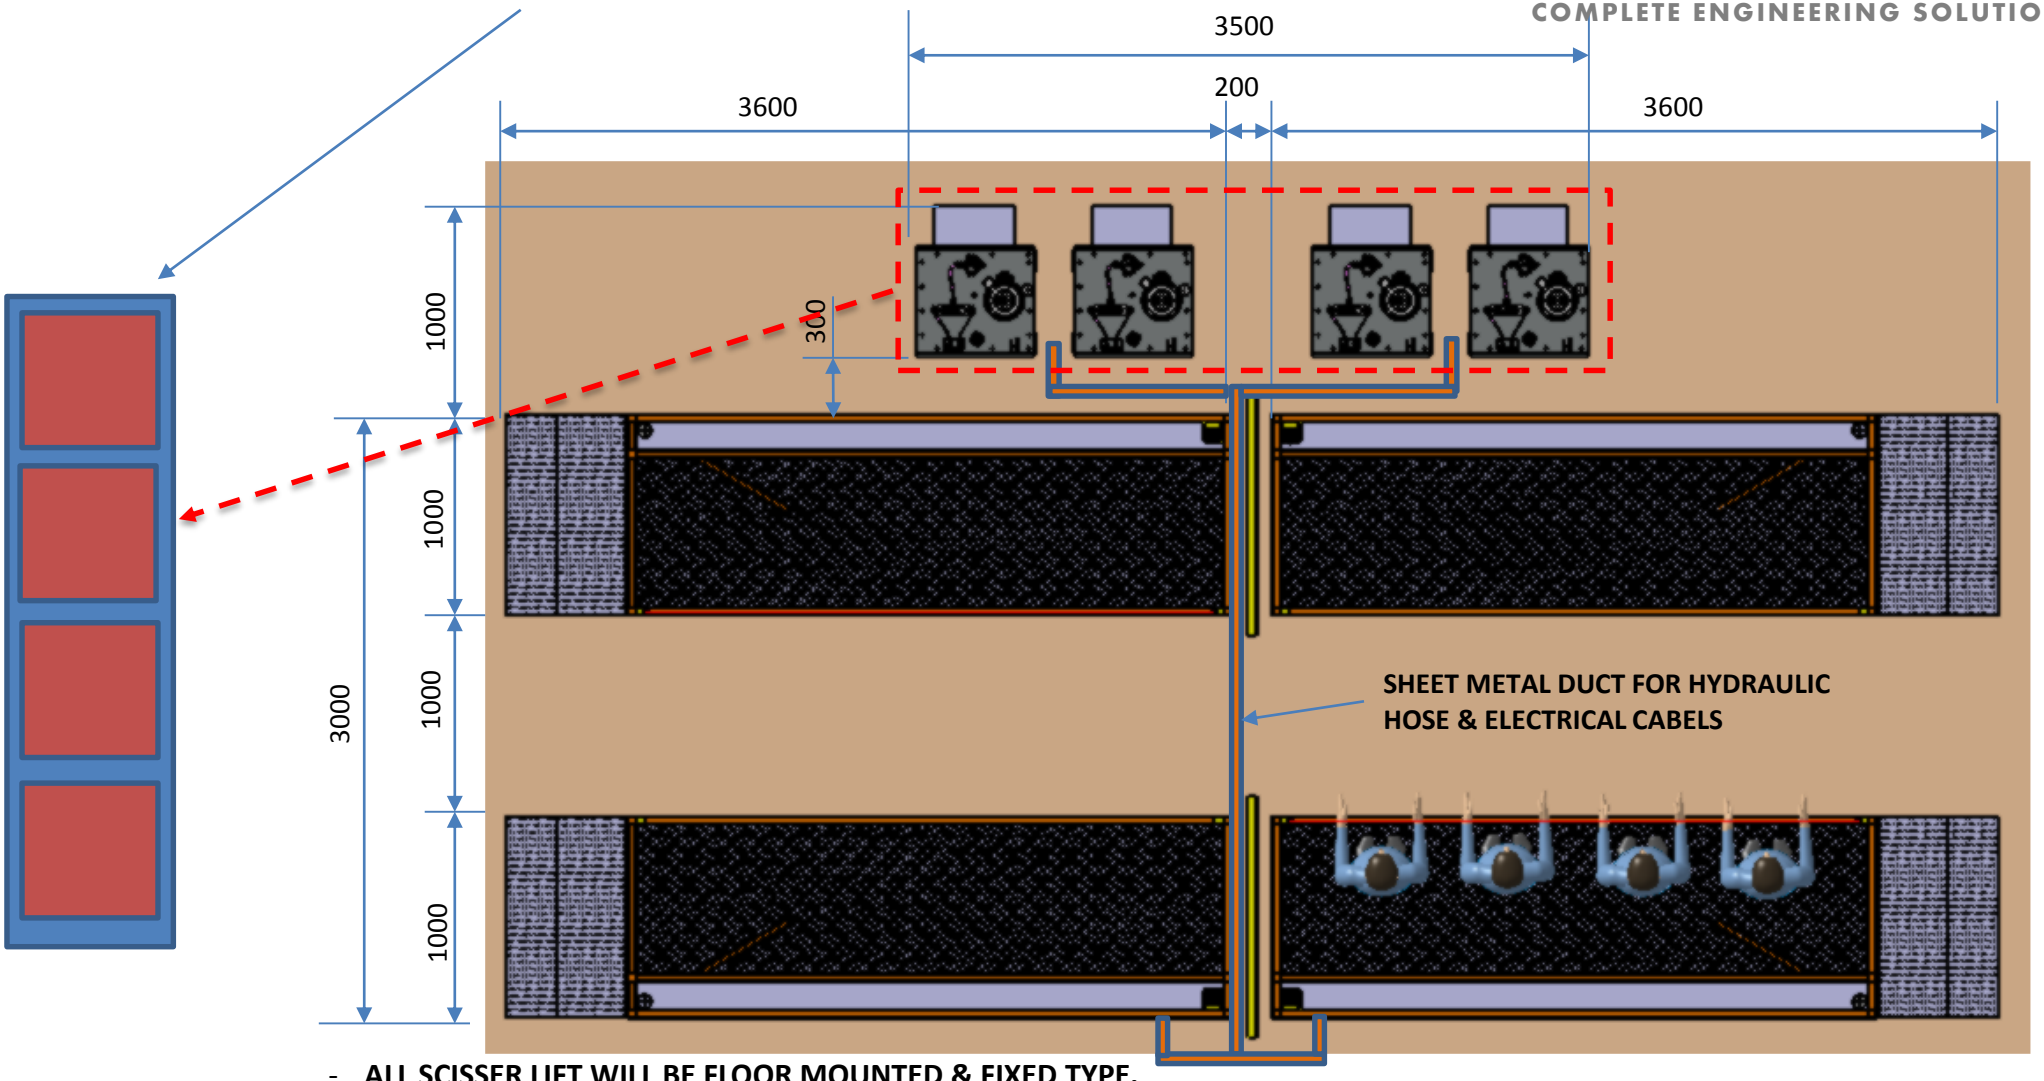



- ALL SCISSER LIFT WILL BE FLOOR MOUNTED & FIXED TYPE.
- ALL LIFTS WILL BE FIITED OVER FLOOR BY ANCHOR FASNER TYPE BOLTS.

* ALL DIMENSIONS ARE IN MM

POWERPACK CIRCUIT DIAGRAM

METRO labE
COMPLETE ENGINEERING SOLUTION



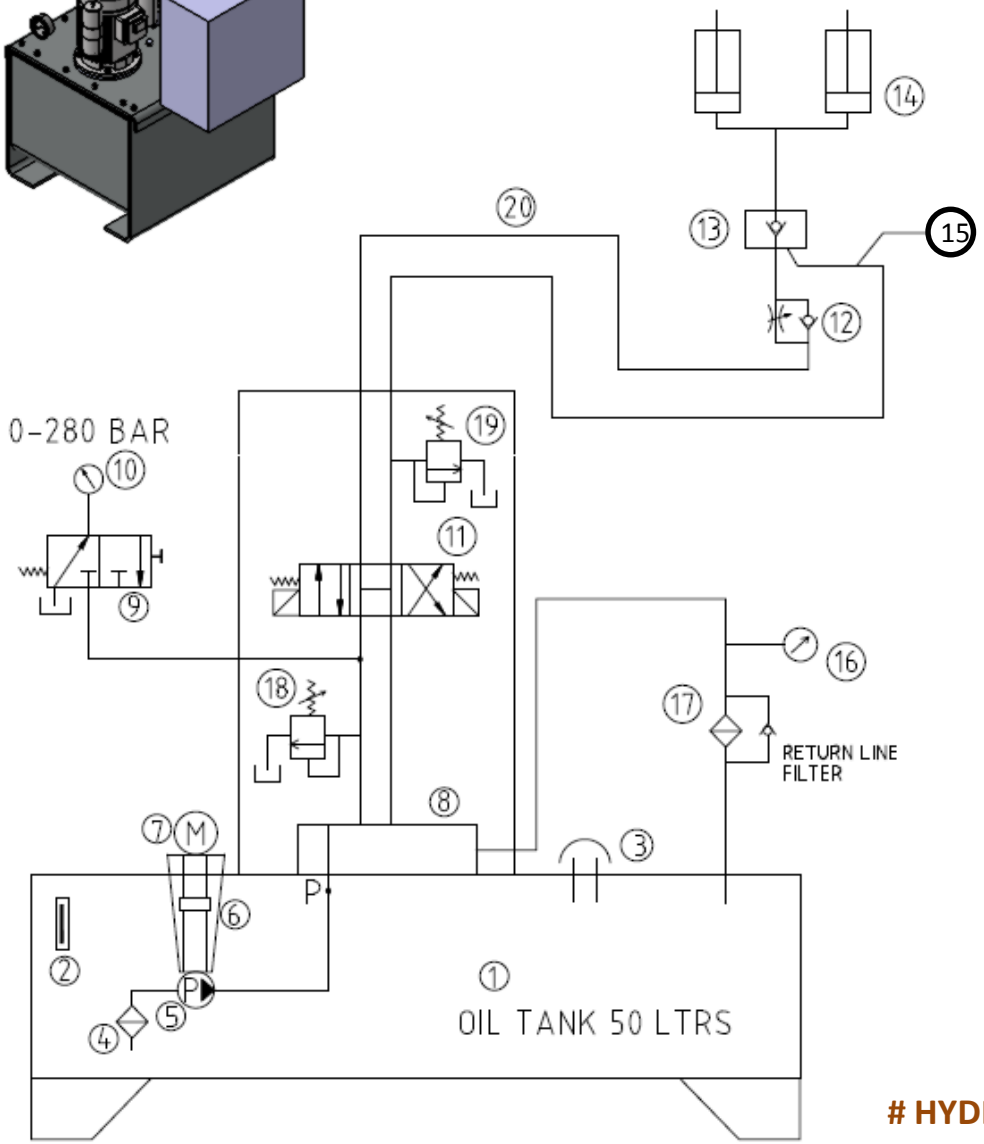


NO.	DESCRIPTION	MAKE	QTY.
20	FLEXIBLE HOSE 3/8" R1	PARKER	1
19	PRESSURE RELIEF VALVE MBA 01 C	YUKEN	1
18	PRESSURE RELIEF VALVE	REXROTH	1
17	RETURN LINE FILTER	HYDROLINE	1
16	RETURN LINE FILTER CLOGGING INDICATOR	HYDROLINE	1
15	FLEXIBLE HOSE 1/4", R1	PARKER	1
14	HYDRAULIC CYLINDER	NIHVA	2
13	PILOT OPERATED CHECK VALVE	REXROTH	1
12	FLOW CONTROL VALVE TCV12	TUCSON	1
11	DIRECTION CONTROL NG6 SIZE	REXROTH	1
10	PRESSURE GAUGE 63MM DIAL 0-280 BAR	WIKA	1
9	PRESSURE GAUGE ISOLATOR	FENNER	1
8	MANIFOLD BLOCK	NIHVA	1
7	ELECTRIC MOTOR 3HP/1440/FLANGE	SIEMENS	1
6	BELL HOUSING AND COUPLING	POLYHYDRN	1
5	GEAR PUMP 6 LPM	REXROTH	1
4	SUCTION STRAINER SC3007	HYDROLINE	1
3	FILLER BREATHER FSB25	HYDROLINE	1
2	OIL LEVEL GAUGE LG3	HYDROLINE	2
1	OIL RESRVIOR 50 LITERS	NIHVA	1

BILL OF MATERIAL


HYDRAULIC OIL "AW-68" GRADE TO BE USED

POWER & CONTROLS

METRO labE
COMPLETE ENGINEERING SOLUTION

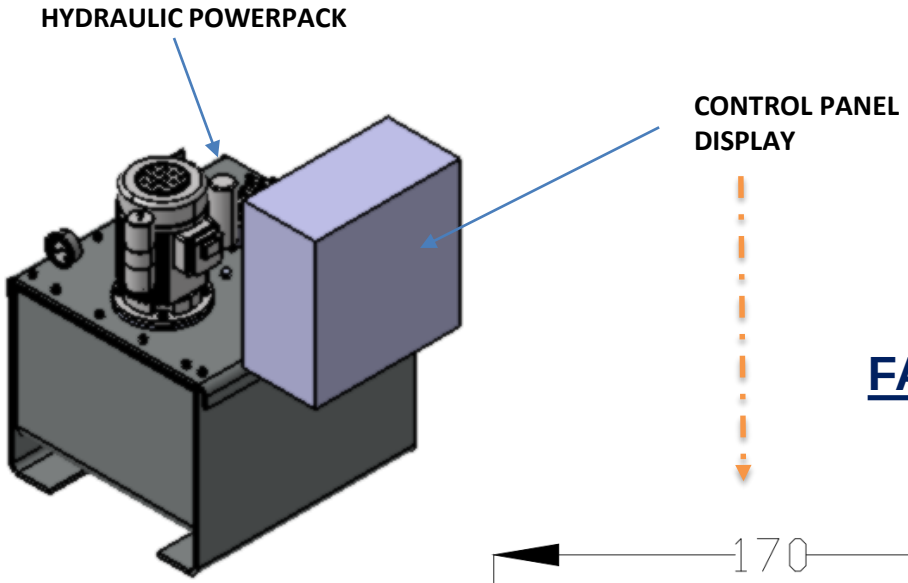

FAULT INDICATOR DISPLAY PANEL

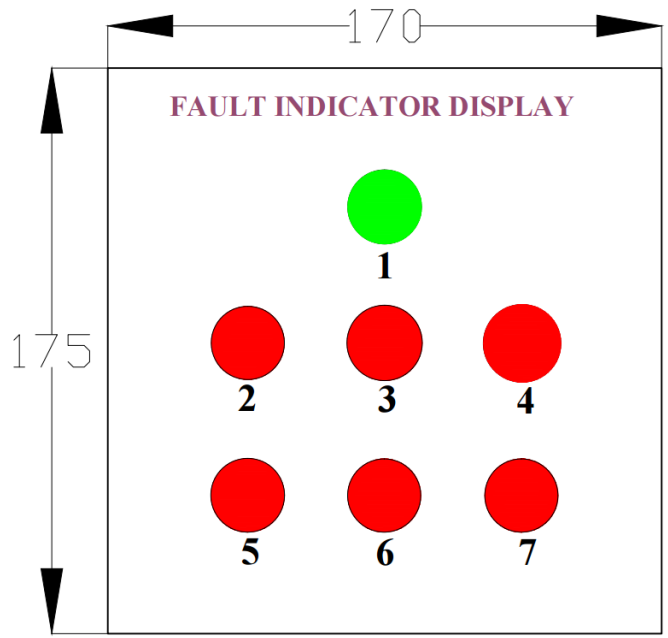

NAME OF FAULTS

1. LIFT AT HOME POSITION
2. EMERGENCY FAULT
3. SAFETY CURTAIN FAULT
4. OIL LEVEL LOW FAULT
5. OVER TRAVEL FAULT
6. OVER WEIGHT FAULT

TOWER LAMP

METRO labE
COMPLETE ENGINEERING SOLUTION

TOWER LAMP INDICATOR DISPLAY



STATUS OF TOWER LAMP

- RED LAMP : ANY FAULT
- YELLOW LAMP : WORK IN PROCESS
- GREEN LAMP : SAFE MODE OPERATION

BUZZER : LIFT IN MOTION

METRO labE
COMPLETE ENGINEERING SOLUTION

SAFETY EQUIPMENTS/MEASURES

SR.NO	SAFETY EQUIPMENT/MEASURES	IMAGE
1	EMERGENCY STOP	
2	SAFETY CURTAIN	
3	DOOR LIMIT SWITCH	

SR.NO	SAFETY EQUIPMENT/MEASURES	IMAGE
4	OVERLOAD RELAY	
5	OVER LOAD INDICATOR	
6	OIL LEVEL SENSOR	

METRO labE
COMPLETE ENGINEERING SOLUTION

QUERY :-

1) SHUT UP HEIGHT TO BE MAX. 300mm
2) POWERPACK & CONTROL PANEL KEEP AWAY UP TO 10-12 MTR FROM SCISSOR.
3) REQUIRED SCISSOR LIFT ASSEMBLY DRAWINGS BY SHOWING INTERNAL COMPONENTS & ITS BOM.
4) SHOW MECHANICAL STOPPER / SUPPORT ARRANGEMENT FOR MAINTANANCE.
5) ELECTRICAL CIRCUIT DIAGRAM & BOM.
6) CHEKKER PLATE THICKNESS, FABRICATED STRUCTURE SECTION TYPE & SIZES?
7) INDICATOR FOR FAULTS. OVER WEIGHT FAULT (MORE THAN 1.3 TON)
8) 02 EMERGENCY STOP ON EACH LIFT.
9) HOOTER LAMP ON EACH LIFT
10) 5G CERTIFIED WELDING FOR FABRICATED /WELMET PARTS.
11) ONSITE CONCRETE FLOOR IS 200mm THICK RCC SLAB WITH A-252 SINGLE LAYER BOTTOM.
12) ONSITE INPUT SUPPLY WILL BE 400V +-10% AC 3PHASE