

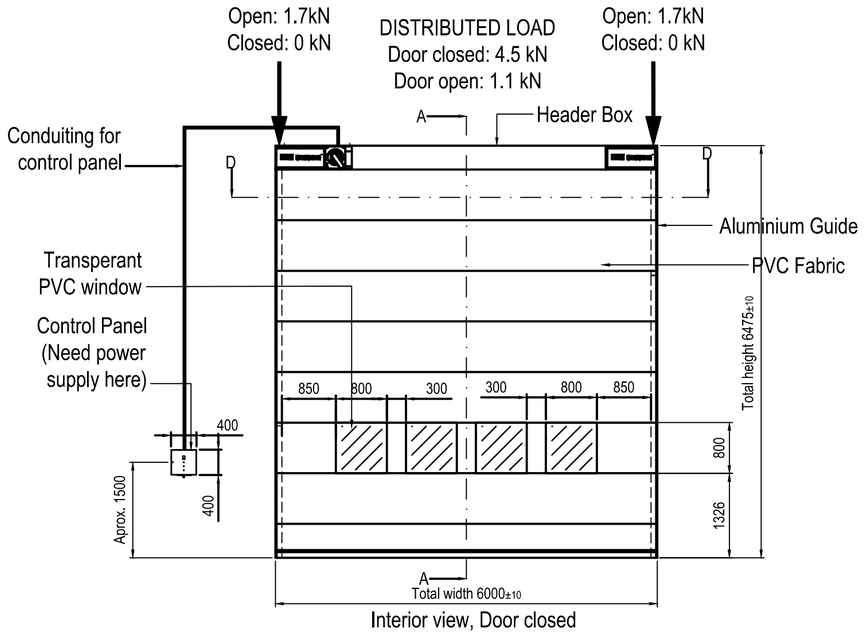




Interior view, Door closed

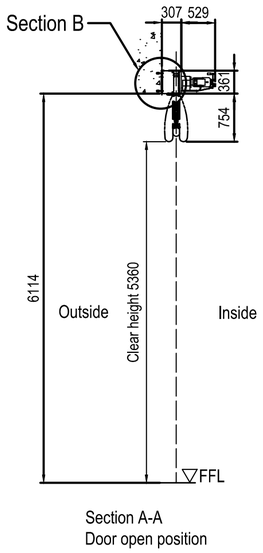



Section A-A
Door open position




Section D-D
Scale 1:1
Door leaf is not shown for clarification





Hole pattern for header box attachment





Force by differential pressure transferred to guide rail at each intermediate position.
F= 2.7 kN


Position of intermidiate beam with guide




Load on header box attachment (each screw), due to wind load and door weight

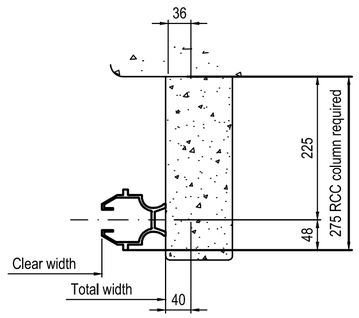


Section C
Guide Mounting Details
Scale 2:1




Section B
Header Mounting Details
Scale 2:1

NOT INCLUDED IN DOOR SUPPLY:

1. Design and supply of all door supporting structural components.
2. Design and supply of all closure between door and adjacent steel.
3. Door jambs adjustable for overall door width and true to plumb.
4. Paint job after completed door installation.
5. Any frameworks being provided by ASSA ABLOY will be clearly indicated as "by ASSA ABLOY".

REQUIREMENTS ON BUILDING:

6. Door head support must be straight within 1/600 of span in the in/out direction and free from protrusions of any kind.
7. For a single door leaf, door head support should be horizontal and straight within 1/600 of span at distributed full door load.
8. Door side jambs must be smooth, straight and parallel, out of plumb must not exceed 2mm/m (total deviation at full length 5 mm) in any direction.
9. Any footings at bottom of jamb columns must not interfere with installation of guide rails at floor level.
10. At time of installation, finished floor, free from obstructions, out to a distance of 2 m on each side of door centreline must be available.
11. Header box must be accessible from both sides during installation.

DOOR PROPERTIES:


12. The door is designed to withstand a differential pressure of 1.15kPa x 1.5 fos.
13. Metal trim: motor side
14. Side profiles
15. Fabric colour: Please specify

ELECTRICAL:

14. One main control panel provided of PLC type.
15. Audible and visual alarm
16. Safety edge
17. Back-up power switch
18. Approx. size of main control panel: WxHxD (500mm x 600mm x 250 mm),
19. Power: 1.4kW
20. Nom. current: 3.3A
21. (max. allowed voltage drop at start: 5%)

BELT HOIST UNITS:

Sk 773.1-90S/4 Z dual brake

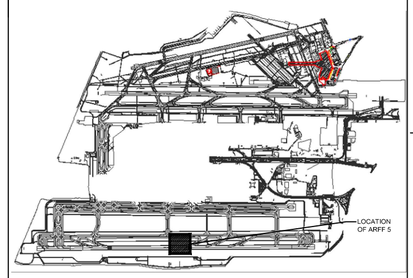


KEY PLAN (NOT TO SCALE)

NOTE:
1. 275 MM RCC COLUMN REQUIRED FOR GUIDE MOUNTING.
IF RCC COLUMN NOT AVAILABLE THEN WE WILL REQUIRE MS STRUCTURE FOR THE SAME.

REFERENCE DRAWINGS :

DIAL-LT-D-UTL-A-20-100 : ARFF4 FIRE STATION ELEVATIONS
DIAL-LT-D-UTL-A-20-101 : ARFF4 FIRE STATION ELEVATIONS
DIAL-LT-D-UTL-A-10-100 : ARFF4 FIRE STATION GROUND FLOOR PLAN

SHOP DRAWING

| REV.NO. | DESCRIPTION | DESIGNED | DRAWN | CHECKED | APPROVED |
|---|---|---|---|---|---|
| C | | | | | |

REVISIONS

| CHECKED BY | SIGN | DATE | CHECKED BY | SIGN | DATE | CHECKED BY | SIGN | DATE |
|---|---|---|---|---|---|---|---|---|
| ARCHITECTURE | | | HVAC | | | GIS | | |
| CIVIL & STRUCTURAL | | | FPS | | | GEOTECH. | | |
| ELECTRICAL | | | PIPING | | | AIRPORT SYSTEMS | | |
| ELV SYSTEM | | | PHE | | | INTERFACE | | |

DELHI INDIRA GANDHI INTERNATIONAL AIRPORT GMR L&T Construction

CLIENT : DELHI INTERNATIONAL AIRPORT LIMITED

PROJECT: INDIRA GANDHI INTERNATIONAL AIRPORT PHASE-3A DEVELOPMENT WORKS

CONCEPT : ASSA ABLOY

PROJECT CONSULTANT: Engineering Design and Research Center L&T Construction (EDRC),

INSTALLED AND SUPPLIED BY: NIMA TECHNOLOGIES PVT LTD

JOB No : JOBNO.

| | NAME | SIGN | DATE |
|---|---|---|---|
| DSGN | G.I.P | | 02.10.2021 |
| DRWN | G.I.P | | 02.10.2021 |
| CHKD | A.K. | | 02.10.2021 |
| APPD | V.T. | | 02.10.2021 |

TITLE: ARFF5 MEGADOOR 5800 X 5360 (RS6)

SCALE 1:1

DRAWING No. DIAL-LT-Q-PTB-A-HSRS-ARFF5-02

SHEET:

PROJECTION FIRST ANGLE

SIZE A3

REV 0

RELEASED FOR ☐ PRELIMINARY ☐ TENDER ☐ INFORMATION ☑ APPROVAL ☐ CONSTRUCTION