
BLOCK ID: SHAMSHABAD RESIDENCE
(L24----)

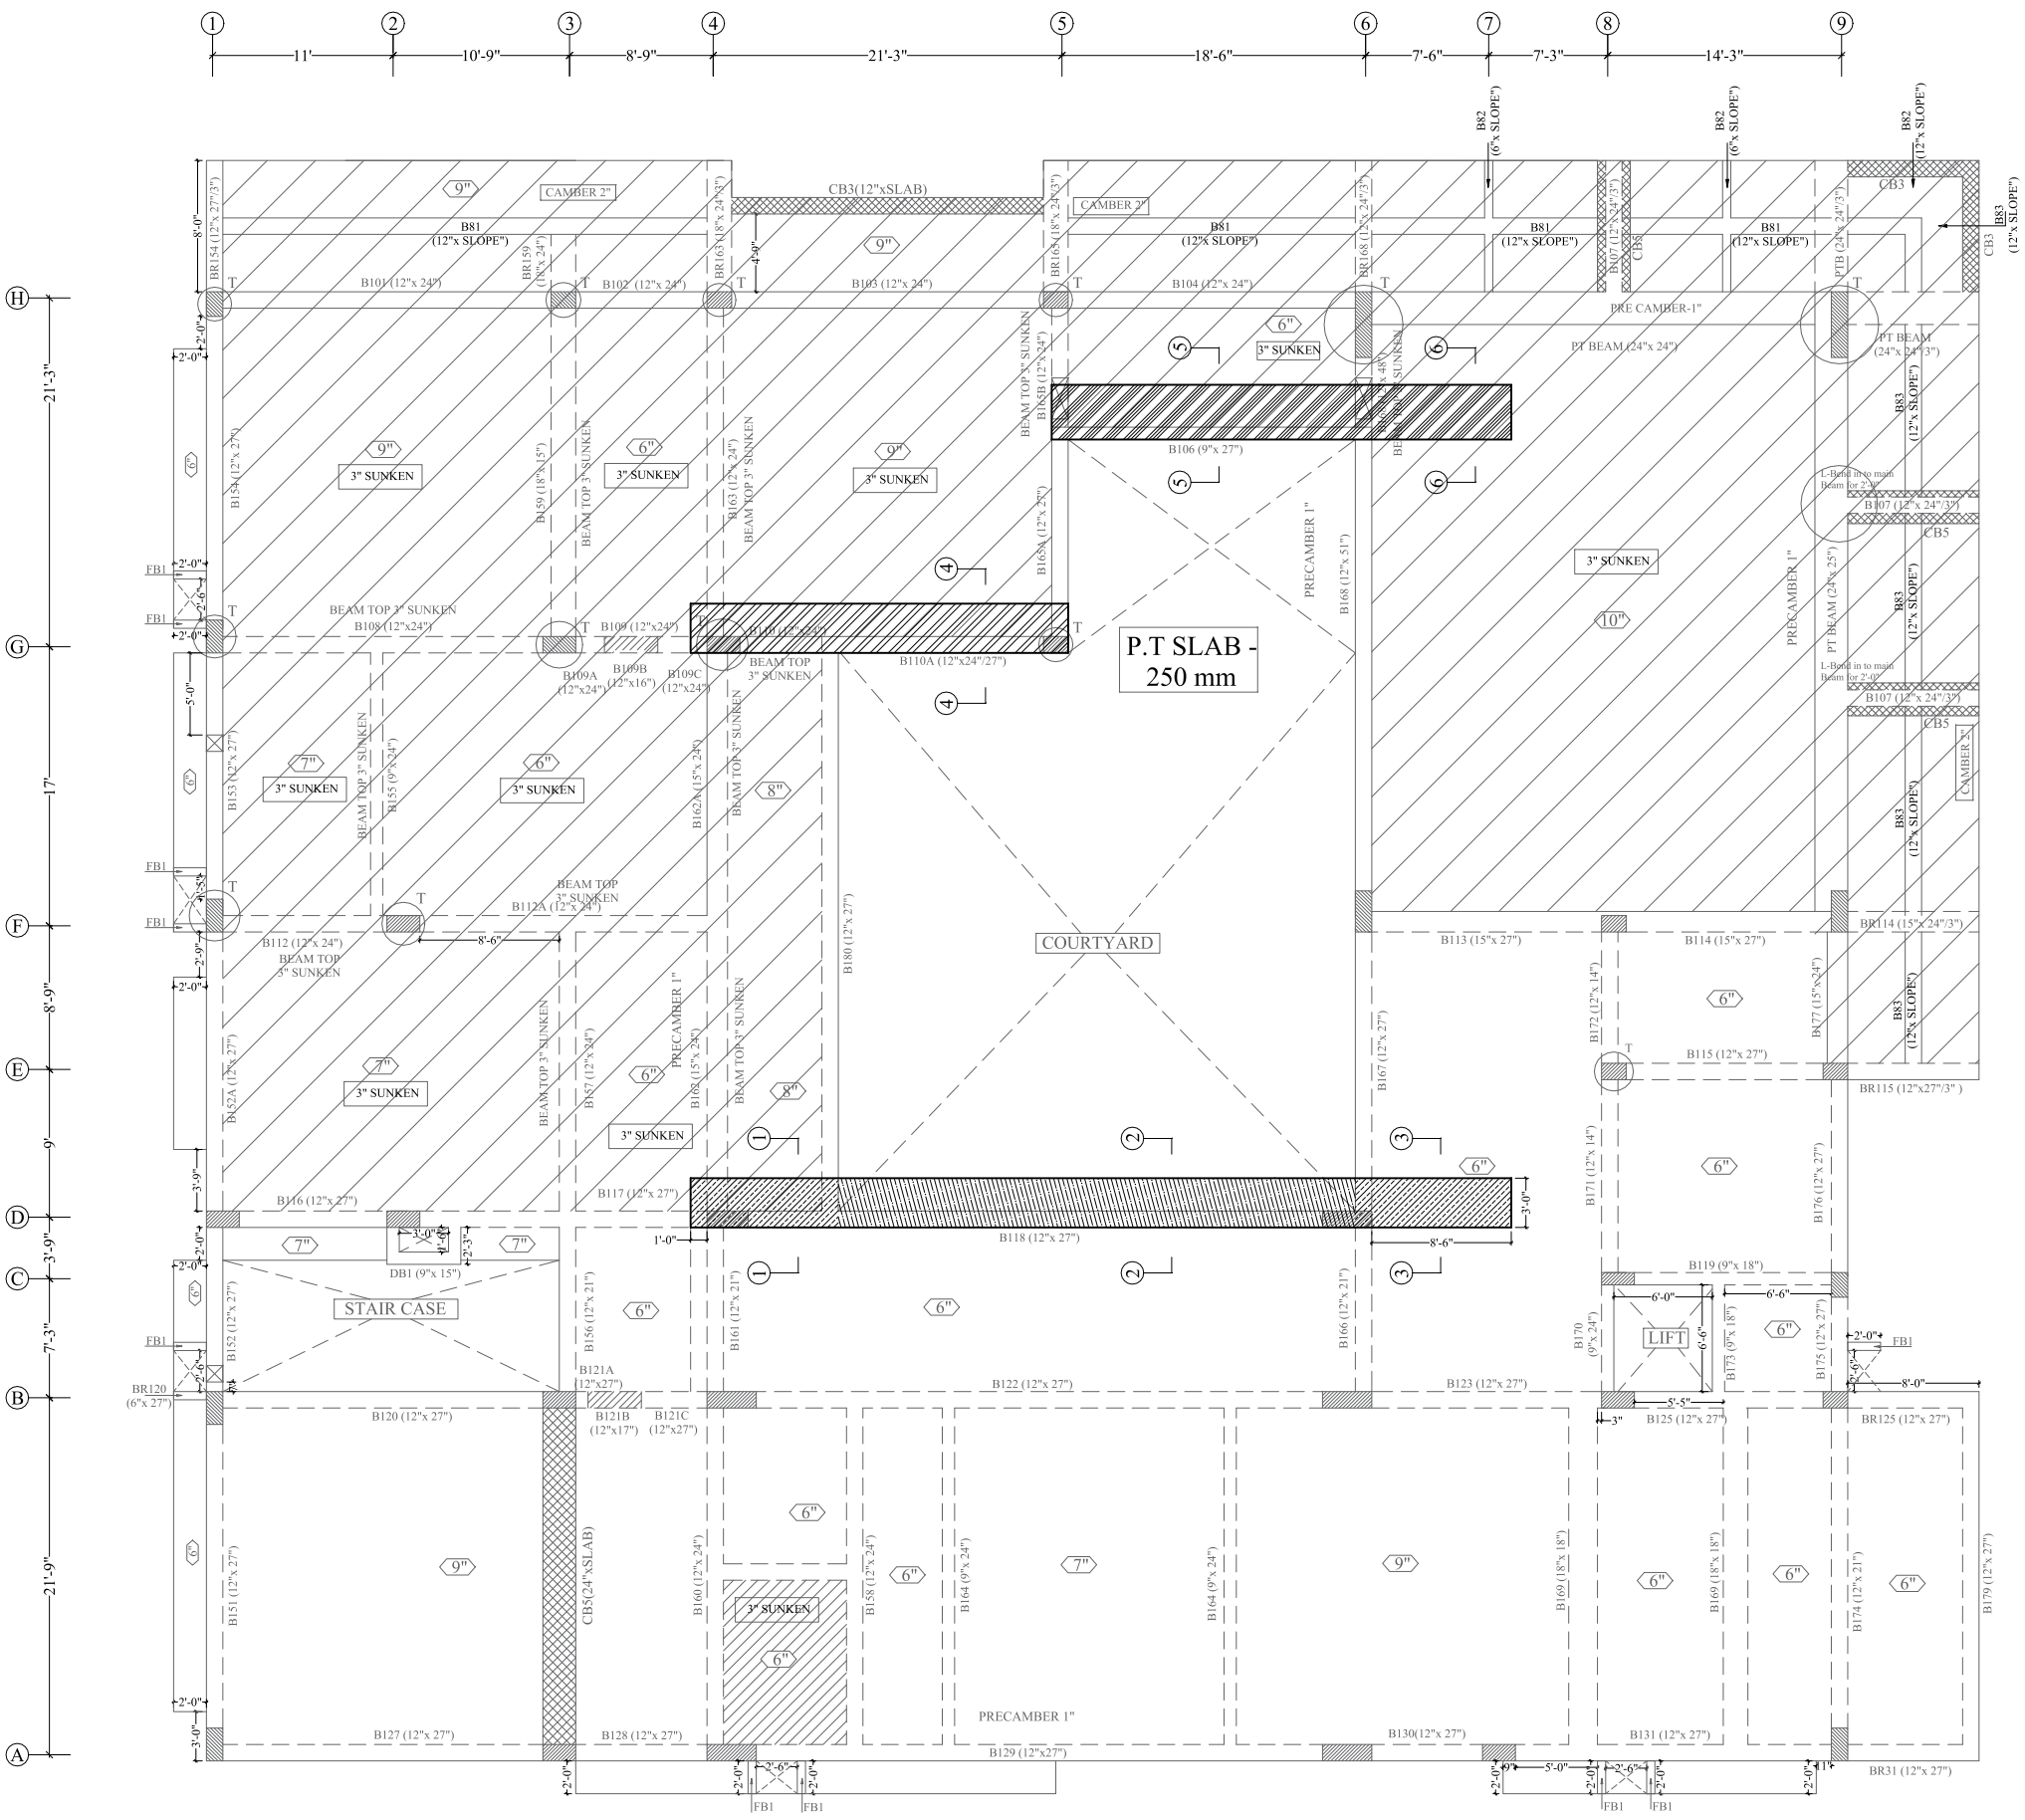

SPECIFIC NOTES	
CONC GRADE	ALL RCC WORKS M35
REINFORCEMENT	FE 500 GRADE
REFERENCES	(BEAM & SLAB DETAILS)
DRG.NO	SA/HR/RES/L24A/F.F -/-
PROJECT:	RESIDENCE AT SHAMSHABAD
CLIENT	Mr. HARISH
TITLE:	FIRST FLOOR -
ARCHITECTS:	SHILPALAYA ASSOCIATES
STRUCTURAL CONSULTANTS	NEEV CONSULTANTS #102,Amba Nivas, Prashant Nagar, Hyd- email : neev.structures@gmail.com mobile : 9849595673

DRAWING

DRAWN :IRSHAD	SCALE : NTS
CHECKED : G.K.C	UNITS : FEET
APPROVED : RAAJ	DATE :20-05-2026

GENERAL NOTES

- THIS DRAWING IS THE PROPERTY OF NEEV CONSULTANTS, HYD.
- THIS DRAWING SHALL NOT BE MEASURED.
- ALL DIMENSIONS SHALL BE CO-RELATED WITH ARCH. & SERVICE DRGS AND ANY AMBIGUITY SHALL BE BROUGHT TO THE NOTICE OF CONCERNED BEFORE THE COMMENCEMENT OF WORK.
- THIS DRAWING SHALL SUPERCEDE ITS PREVIOUS REVISIONS.

LEGEND

- 6" — SLAB THICKNESS
- LEAVE DOWELS FOR STAIRCASE
- CONCEALED BEAM
- T — COLUMN TERMINATION AT THIS LEVEL
- COLUMN REDUCTION (RE-3")

CONSTRUCTION

- PROVIDE 1" CLEAR COVER TO BEAM MAIN BARS ON ALL SIDES
- WHERE SLAB THICKNESS VARIES FOR WATER PROOFING ETC, THICKNESS OF SLAB SHALL BE ADJUSTED IN SLAB WHEREAS SHUTTERING IS MADE TO LEVEL
- CAMBER: FOR BEAMS/SLABS ABOVE 12'-0" SPAN, CAMBER @ L/250 OR 25MM WHICHEVER IS GREATER.
- FOR SUNKEN SLABS,WATER RETAINING AREAS PROVIDE SLOPE IN CONCRETE AT 1 IN 150
- FOR SUNKEN SLABS, PROVIDE 1" PVC DRAIN PIPE AT LOWEST END
- WHILE CASTING OF SLAB AT ANY LEVEL IMMEDIATE LOWER SLAB BE SUPPORTED UNTILL 24 HOURS AFTER CASTING
- NECESSARY OPENINGS IN BEAMS FOR SERVICE PIPES SHALL BE LEFT DURING CONCRETING ONLY

CURING


- 10 DAYS FROM THE DATE OF CASTING

DESHUTTERING

- FOR SLABS & BEAMS UP TO 14'-0" SPAN: SHUTTERING CAN BE REMOVED AFTER 7 DAYS AND PROPS KEPT UNTIL 14 DAYS
- FOR SLABS & BEAMS 14'-0" SPAN: SHUTTERING CAN BE REMOVED AFTER 10 DAYS AND PROPS KEPT UNTIL 14 DAYS


GENERAL

- **BEAM DEPTH IS INCLUSIVE OF SLAB THICKNESS**

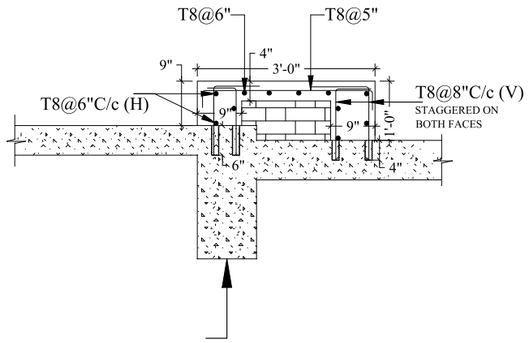


B118 (12"x 27")

DETAIL-1

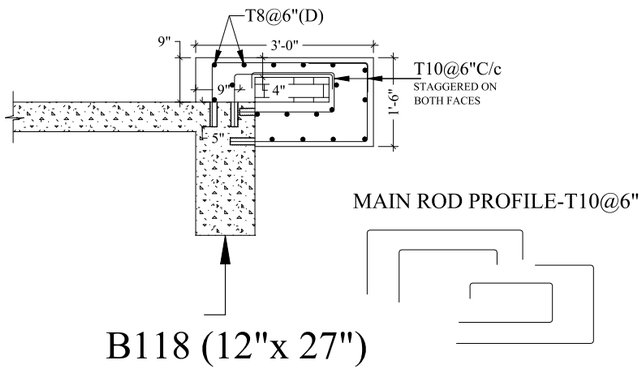


B118 (12"x 27")

DETAIL-2

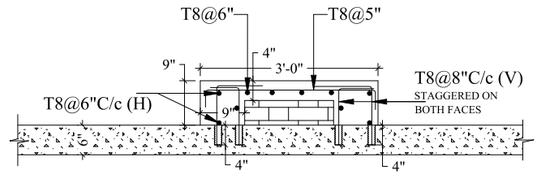


DETAIL-3

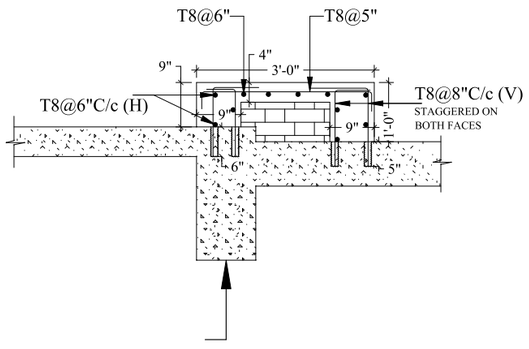


B110 (12"x 27")

DETAIL-4

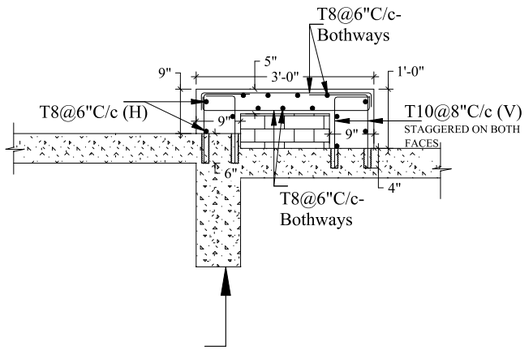

B106 (9"x 27")

DETAIL-5

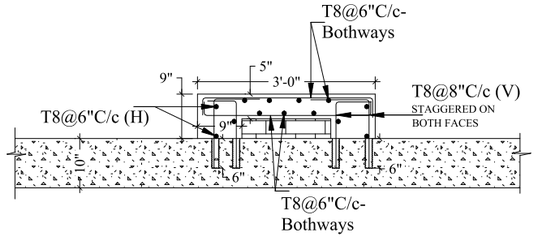

DETAIL-6

BLOCK ID: SHAMSHABAD RESIDENCE (L24----)

SPECIFIC NOTES

CONC GRADE	ALL RCC WORKS M25
REINFORCEMENT	FE 500 GRADE
REFERENCES	(BEAM & SLAB DETAILS)

CONSTRUCTION

- PROVIDE 1" CLEAR COVER TO BEAM MAIN BARS ON ALL SIDES
- WHERE SLAB THICKNESS VARIES FOR WATER PROOFING ETC, THICKNESS OF SLAB SHALL BE ADJUSTED IN SLAB WHEREAS SHUTTERING IS MADE TO LEVEL
- CAMBER: FOR BEAMS/SLABS ABOVE 12'-0" SPAN, CAMBER @ L/250 OR 25MM WHICHEVER IS GREATER.
- FOR SUNKEN SLABS,WATER RETAINING AREAS PROVIDE SLOPE IN CONCRETE AT 1 IN 150
- FOR SUNKEN SLABS, PROVIDE 1" PVC DRAIN PIPE AT LOWEST END
- WHILE CASTING OF SLAB AT ANY LEVEL IMMEDIATE LOWER SLAB BE SUPPORTED UNTILL 24 HOURS AFTER CASTING
- NECESSARY OPENINGS IN BEAMS FOR SERVICE PIPES SHALL BE LEFT DURING CONCRETING ONLY

CURING

- 10 DAYS FROM THE DATE OF CASTING

DESHUTTERING

- FOR SLABS & BEAMS UP TO 14'-0" SPAN: SHUTTERING CAN BE REMOVED AFTER 7 DAYS AND PROPS KEPT UNTIL 14 DAYS
- FOR SLABS & BEAMS 14'-0" SPAN: SHUTTERING CAN BE REMOVED AFTER 10 DAYS AND PROPS KEPT UNTIL 14 DAYS

GENERAL

- BEAM DEPTH IS INCLUSIVE OF SLAB THICKNESS

LEGEND

- 6" — SLAB THICKNESS
- LEAVE DOWELS FOR STAIRCASE
- CONCEALED BEAM
- INVERTED BEAM
- T — COLUMN TERMINATION AT THIS LEVEL
- EC — EXTENTION COLUMN
- Re-3" — COLUMN REDUCTION
- FC — FLOATING COLUMN

GENERAL NOTES

- THIS DRAWING IS THE PROPERTY OF NEEV CONSULTANTS, HYD.
- THIS DRAWING SHALL NOT BE MEASURED.
- ALL DIMENSIONS SHALL BE CO-RELATED WITH ARCH. & SERVICE DRGS AND ANY AMBIGUITY SHALL BE BROUGHT TO THE NOTICE OF CONCERNED BEFORE THE COMMENCEMENT OF WORK.
- THIS DRAWING SHALL SUPERCEDE ITS PREVIOUS REVISIONS.

DRAWING		
	DRAWN : IRSHAD	SCALE : NTS
	CHECKED : SHREE	UNITS :FEET
	APPROVED : RAAJ	DATE: 20-05-2026

DRG.NO	SA/HR/RES/L24A/F.F -/-
PROJECT:	RESIDENCE AT SHAMSHABAD
CLIENT	Mr. HARISH
TITLE:	FIRST FLOOR SECTIONS
ARCHITECTS:	**INTROSPECTIONS**
STRUCTURAL CONSULTANTS	NEEV CONSULTANTS #102,Amba Nivas, Prashant Nagar, Hyd-8 email : neev.structures@gmail.com mobile : 9849595673