


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2200	4500	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2280	4580	485	

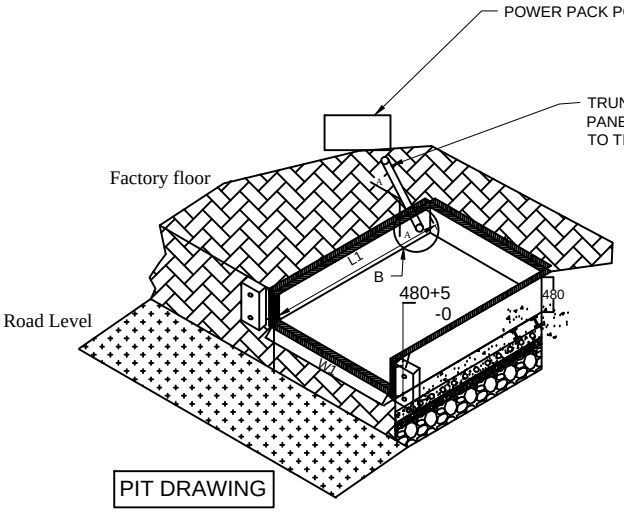


PIT DRAWING



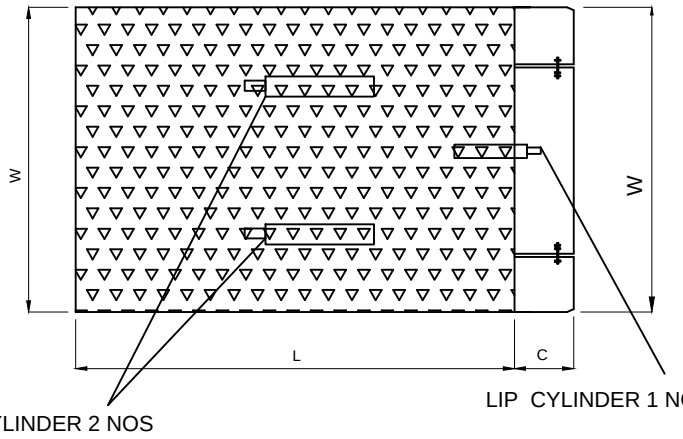



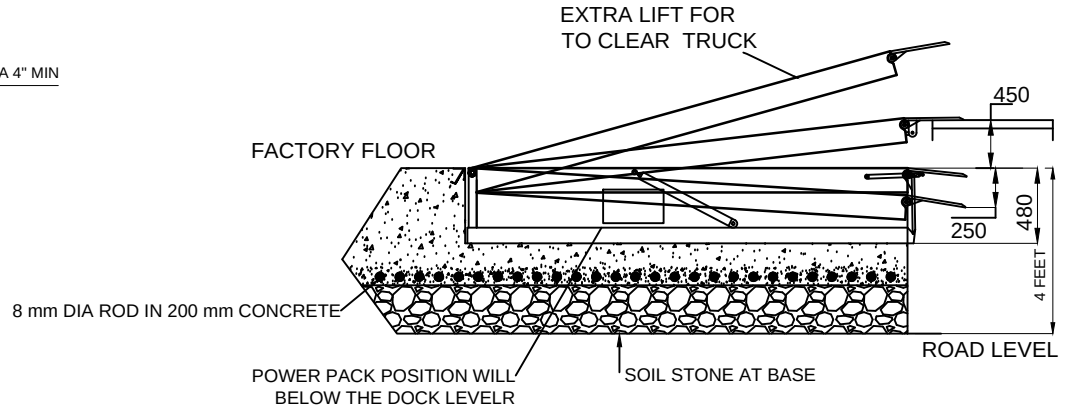

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ±15 MM

DOCK LEVELER- 09 TON CAPACITY -

CLIENT APPORVAL-			NIHVA TECHNOLOGIES PVT. LTD.
	DATE	SIGN.	
DRAWN :- OMKAR	23/02/2016		CLIENT - NHK
CHECKED :- ANIL	23/02/2016		PROJECT - NHK
ALL DIMENSION ARE IN mm			SITE -
If any queries contact : projects@nihva.com			DWG. NO. - NIHVA/15-16/199

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com