NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Egis India Consulting Engineers Pvt Ltd
Egis Tower | Plot No. 66, Sector - 32 ,
Gurugram, Haryana-122001, India

Date : 24.12.2020
Quote NO : SQT.20.21.2908
Kind Attn : Mr.Nikhil Mathew Mangalathu
Email Id : Nikhil.M@egis-india.com
Contact No: 8454879814

Subject : Quotation for 2 Hours Fire rated Rolling Shutter.

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**2 Hrs Fire Rated Rolling Shutter (100% Imported)**	6000	3500	1	334,000	334,000	20,000	20,000
2	**2 Hrs Fire Rated Rolling Shutter (100% Imported)**	5000	3500	1	313,000	313,000	20,000	20,000
3	**2 Hrs Fire Rated Rolling Shutter (100% Imported)**	4000	3500	1	292,000	292,000	20,000	20,000
4	**2 Hrs Fire Rated Rolling Shutter (100% Imported)**	3000	3000	1	267,000	267,000	20,000	20,000
5	**2 Hrs Fire Rated Rolling Shutter (100% Imported)**	2500	3500	1	250,000	250,000	20,000	20,000
6	**2 Hrs Fire Rated Rolling Shutter (100% Imported)**	3500	3500	1	281,000	281,000	20,000	20,000
			Total			**1,737,000**		**120,000**
4	P&F Charges			3%		52,110		
	Total Without Taxes					1,789,110		120,000
	GST Extra @ 18%			18%		322,039.80		21,600
	Total With Taxes					**2,111,150**		**141,600**
5	Transportation Charges					**Extra at actual**		
6	Unloading Charges @ Site					**In Client Scope**		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019


An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

2 Hour fire Rated Rolling Shutter



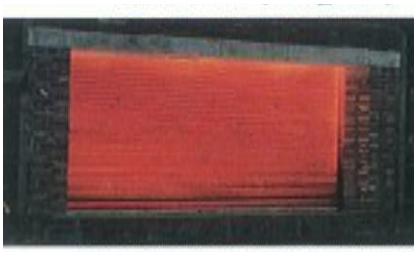

Sr .No.	Specification	2 Hour Fire Rated Rolling Shutter
1	Certification	• BS 476 Part 22 & MS 1073 Part 3 1988 • Tested in Warrington Fire Reasearch Centre UK & Sirim Malasiya
2	Test	UL - 10B Tested
3	Rolling Curtain Thickness	1mm Standred thickness
4	Shutter Slats	Zinc coated steel solid slats
5	Shutter Curtain	Roll formed from 1st grade BHP Zincalume steel SKB-A7 curve slat curtain
6	Guide Rail	Fabricated from hot-dipped galvanised steel of 3.0 mm with one piece design surface mounted type.
7	Bottom Bar	Assembled of 2 Pieces of 38 x 38 x 3 mm galvanised steel angle bolted 800 mm pitch with galvanised bolts and nuts or 2 pieces of 40 x 40 x 6 mm steel flat bar.
8	Shutter Enclosure Box	Pressed Galvanised steel sheet to suite box size comply to fire test approved thickness.
9	Operation Control	Gear motor with Thermal protector, limit switches, manual overide, c/w push button switch with keys lockable.
10	Motor Drive Unit	Power Source: 110v 60Hz 1 phase 220v 6OHz 1 phase 230v 50Hz 1 phase 400v 50Hz 3 phase Manual Chain Override One unit push button switch Gravity drop level Auto close by relay switch after receive of 24vdc fire signal
11	Fire Mode	Fire Shutter will auto close via upon receiving of 24VDC fire signal

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description
1	Secured and fully covered Store area to keep the material
2	Scaffolding/Hydra/Crane/Forklift Etc - Required for Installation at Site
3	Electrical Supply on the site single phase/three phase points at different places.
4	Any civil / masonry/structural work required
5	All structure support required
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.
7	Conduits, Cables required

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 9 - 10 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

Please feel free to Contact **Mr.Bhavin Jain on 8551092333** For any further Clarification /Information in this Concern.

With Best Regards
Pradeep Shinde
7219206333
For NIHVA Technologies Pvt Ltd