

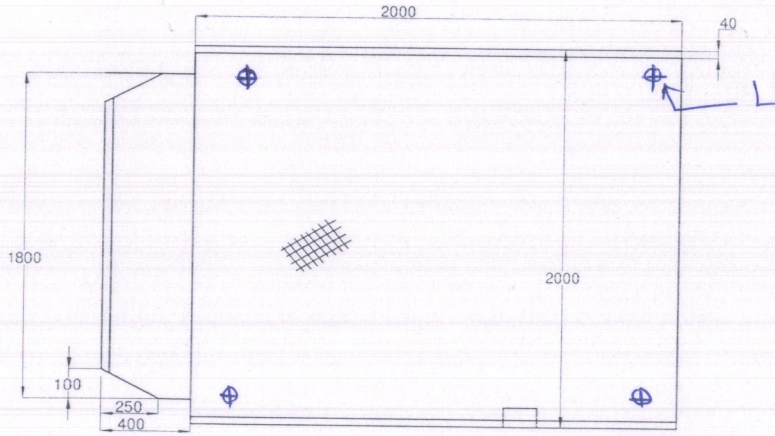


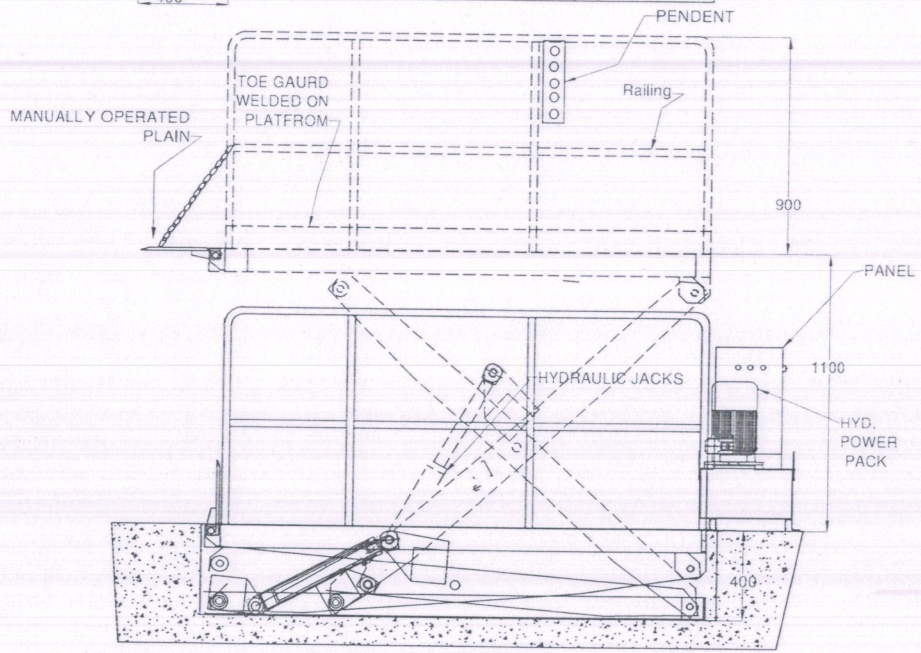

NOTE :
1. HYDRAULIC HOSE LENGTH FROM POWERPACK TO PIT OPENING : 5 MTR
2. ELECTRICAL CABLE FROM CONTROL PANEL TO PIT OPENING : 5 MTR
3. COLOR : GOLDEN YELLOW RAL 1004.
4. INPUT SUPPLY : 3 PHASE 400 VOLT WITH NEUTRAL NEAR POWER PACK LOCATION.
5. PAINTING - ALL PARTS IN GOLDEN YELLOW , ZEBRA MARKS FOR SIDE OF PLATFORM
6. GA DRAWING WITH ALL VIEWS IN SCALE 1:1 TO BE PROVIDED BEFORE MANUFACTURING.
7. OPERATION & MAINTENANCE MANUAL WITH SPARE PARTS LIST TO BE PROVIDED .
8. ALL RAW MATERIAL TEST CERTIFICATES TO BE PROVIDED .
9. INDIVIDUAL TEST CERTIFICATES OF HYDRAULIC CYLINDER & HYDRAULIC POWER-PACK TO BE PROVIDED BY SUPPLIER.
10. LOAD TEST TO BE PROVIDED BEFORE DISPATCH FOR RATED LOAD .

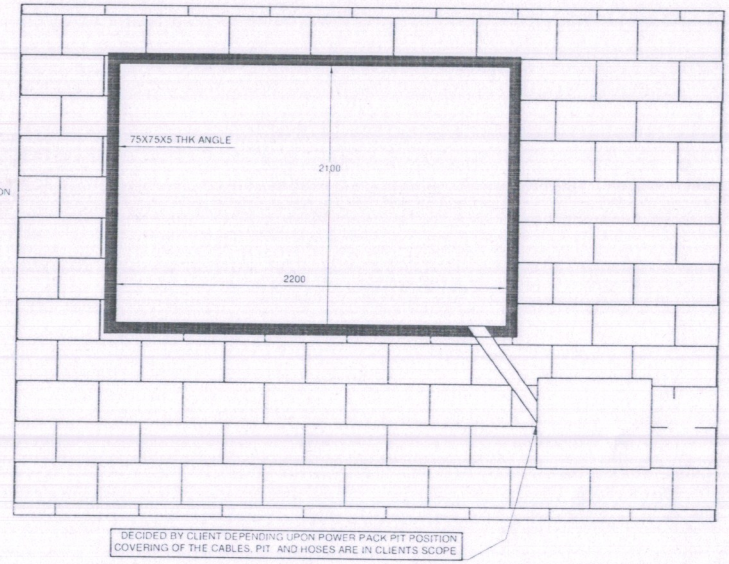

PIT DRAWING

NOTE :
1. PIT FOR SCISSORLIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
4. COVERING REQUIRED FOR HOSES AND CABLES AND RELATED CIVIL WORK IS IN CLIENTS SCOPE
5. WATER DRAINAGE AND PIT CLEANING NEEDS TO BE CONSIDERED AND DONE BY CLIENT

NIHVA TECHNOLOGIES PVT. LTD. * PUNE *


7/4/2021

Approved with vendor drawing no - NIHVA/20-21/VDR/0122


Specifications

	Equipment		Scissors Lift	
	Rated Capacity		W Kgs	3000
Dimensions	Platform	Length	mm	2000
		Width	mm	2000
	Overall	Length	mm	2150
		Width	mm	2000
	Lip One side		mm	400 x 1800
	Lip Operation			Manual
	Lip Type			Single
	Heights	Closed	mm	400
		Lifted	mm	1100
Drive	Lift Motor 3 Ph AC		H.P.	3
	Pendent			1 Nos
	Lift & Lower cut-off - Yes supply hose - 6 m/ Cable - 5m Colour - 1004			


EQUIPMENT - SCISSORS TABLE

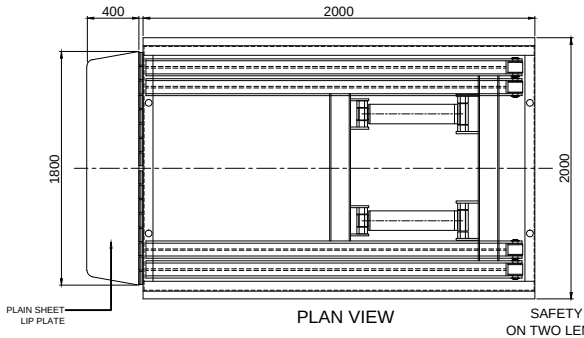


PLAN VIEW

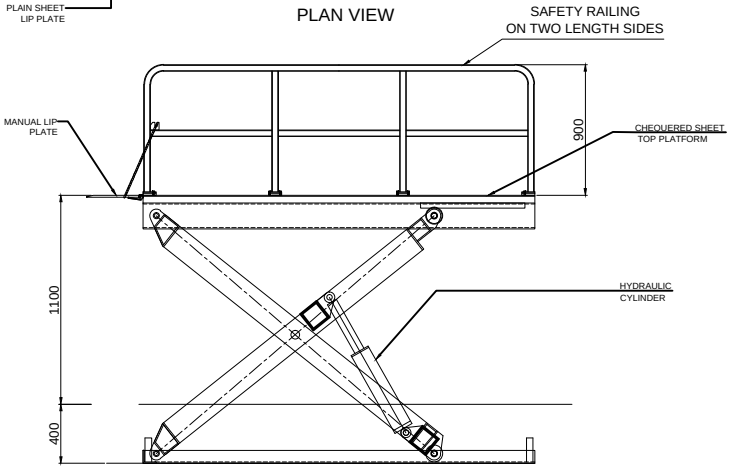


FRONT VIEW - OPEN POSITION OF SCISSOR LIFT

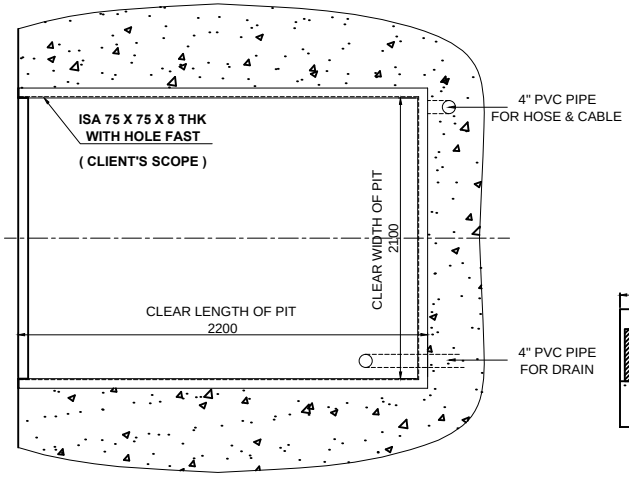


TOP VIEW OF PIT

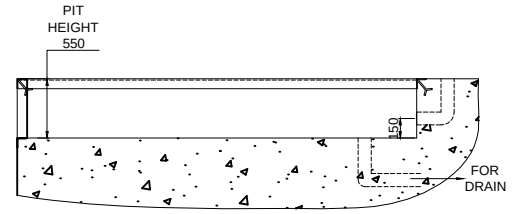

FRONT VIEW OF PIT

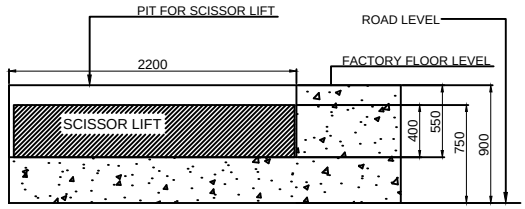

SCISSOR LIFT INSTALLATION LAYOUT

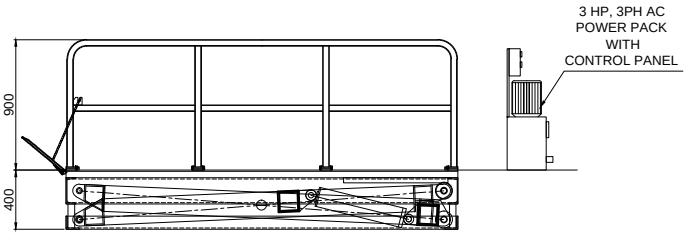

FRONT VIEW - SHUT POSITION OF SCISSOR LIFT

TOLERANCE - ±5mm

PAINT - RAL 1004 GOLDEN YELLOW

CAPACITY	3 TON
PLATFORM SIZE	2000 (L) X 2000(W)
POWER PACK	3 HP, 3 PH
SHUT HEIGHT	400 MM
LIFT HEIGHT FROM PLATFORM TOP	1100 MM
TOTAL HEIGHT FROM GROUND	1850 MM

NOTE :

1. HYDRAULIC HOSE LENGTH FROM POWERPACK TO PIT OPENING : 5 MTR
2. ELECTRICAL CABLE FROM CONTROL PANEL TO PIT OPENING : 5 MTR
3. COLOR : GOLDEN YELLOW RAL 1004.
4. INPUT SUPPLY : 3 PHASE 400 VOLT WITH NEUTRAL NEAR POWER PACK LOCATION.
5. PAINTING - ALL PARTS IN GOLDEN YELLOW , ZEBRA MARKS FOR SIDE OF PLATFORM
6. GA DRAWING WITH ALL VIEWS IN SCALE 1:1 TO BE PROVIDED BEFORE MANUFACTURING.
7. OPERATION & MAINTENANCE MANUAL WITH SPARE PARTS LIST TO BE PROVIDED .
8. ALL RAW MATERIAL TEST CERTIFICATES TO BE PROVIDED .
9. INDIVIDUAL TEST CERTIFICATES OF HYDRAULIC CYLINDER & HYDRAULIC POWER-PACK TO BE PROVIDED BY SUPPLIER.
10. LOAD TEST TO BE PROVIDED BEFORE DISPATCH FOR RATED LOAD .

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE
PIT MOUNTED ELECTRO-HYDRAULIC SCISSOR LIFT

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	SIGN	DATE
DRAWN	SIDDHESHWAR	6.4.2021
CHECK	SIDDHESHWAR	6.4.2021
REV.		
APPROVAL		

CLIENT -
PROJECT -
SITE -
DWG. NO. : NIHVA/20-21/VDR/0122

If any queries contact : nihvacare@nihva.com
SCALE: NTS | WT: | SHEET: 01 OF 01
ALL DIMENSION ARE IN mm