

DRAWING :

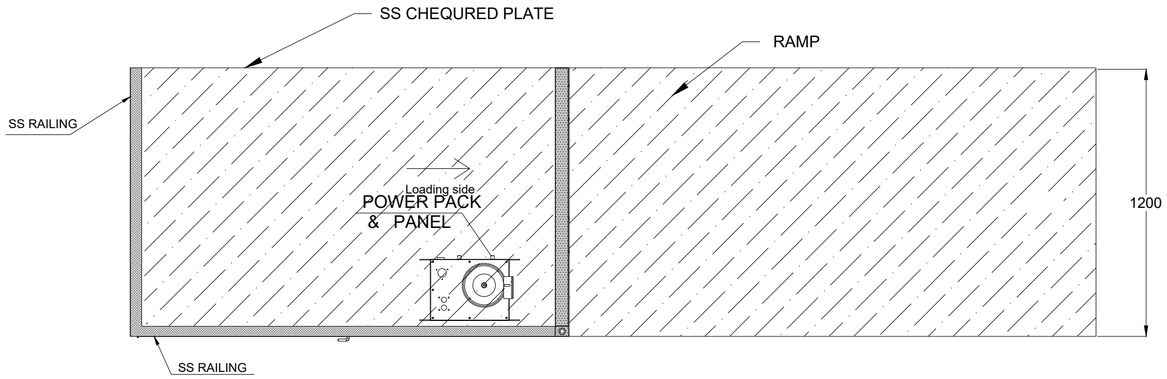

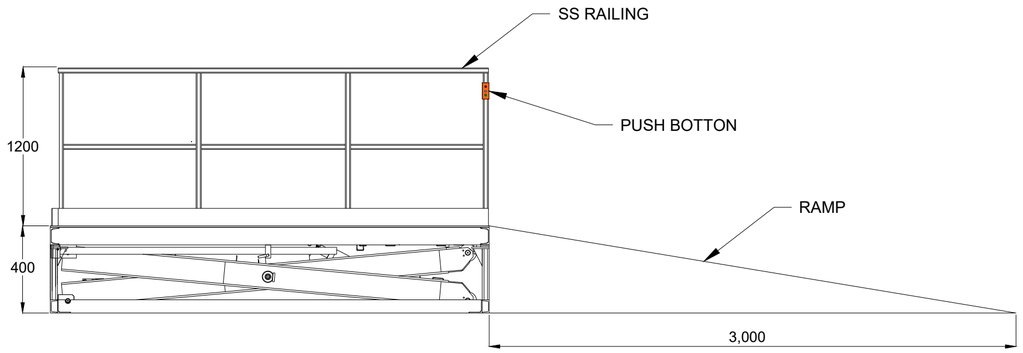

SR.			SR.		
1.	OVERALL LENGTH	2,000 MM	31.	MOUNTING	FLOOR
2.	OVERALL WIDTH	1,200 MM	32.	ACCESORIES	1.ALL SIDE BELLOW
3.	OVERALL HEIGHT	1,300 MM	33.		2.OVER LOAD PRO TECTION WITH SIRON
4.	PLATFORM LENGTH	2,000 MM	34.		
5.	PLATFROM WIDTH	1,200 MM	35.		3.INTERLOCKING - THREE POTENTIAL FREE CONTACT
6.	TOP CHEQURED PLATE	3 MM THK (SS304)	36.		
7.	CAPACITY	2000 KG	37.		
8.	LOADING TYPE	STANDARD	38.		
9.	MOC	MS	39.		
10.	CLOSED HEIGHT	400 MM	40.		
11.	LIFT HEIGHT	1250 MM			
12.	OVERALL LIFT	1650 MM			
13.	SCISSORS	SINGLE			
14.	RAILING TYPE	REMOVABLE Ø30			
15.	RAILING HEIGHT	900 MM			
16.	RAILING SIDE'S	TWO			
17.	TOE GAURD	YES			
18.	POWER PACK TYPE	STD			
19.	POWER PACK LOCATION	RH SIDE			
20.	HP	5 HP			
21.	PHASE	3 PHASE			
22.	PENDENT TYPE	LOOSE			
23.	PENDENT QTY	1 NOS			
24.	PENDENT LOCATION	ON RAILING			
25.	PANEL SPECS	5 HP			
26.	PANEL LOCATION	ON POWER PACK			
27.	PANEL TYPE	3 PHASE STD			
28.	SUPPLY HOUSE	3.5 M			
29.	CABLE	5 M			
30.	FINISH COLOR	YELLOW / BLACK			

REVISION:	DATE:
REV 01 - 1.RAILING HEIGHT CHANGES 900 MM TO 1200 MM 2.PUSH BUTTON POSITION 3.ADD RAMP SIDE RALING	12-03-2026

NOTE.:

CLOSE VIEW

1.MOTOR HEIGHT IS NOT CONFIRMED.
2.THE CLOSING HEIGHT OF THE SCISSOR LIFT VARY BETWEEN 400MM TO 600 MM.

This drawing & design is the property of NIHVA TECHNOLOGIES PVT. LTD. Not to be sold or copied to any other concern

TITLE - SPM				NIHVA TECHNOLOGIES PVT.LTD. PUNE WEBSITE - www.nihva.com	
DWG NO-NTPL-000-PM-01				PRODUCT :SCISSOR LIFT	
	NAME	SIGNATURE	DATE		
DRAWN	V.W.		09-03-2026	DWG: NTPL-000-PM-01	REVISION :
CHK'D	B.S.		10-03-2026	LOCATION : DUBAI	WEIGHT :
APPV'D	V.T.		10-03-2026	MATERIAL :	QTY : 01 NO'S
If any queries contact:design@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN MM		A2			SHEET 1 OF 1