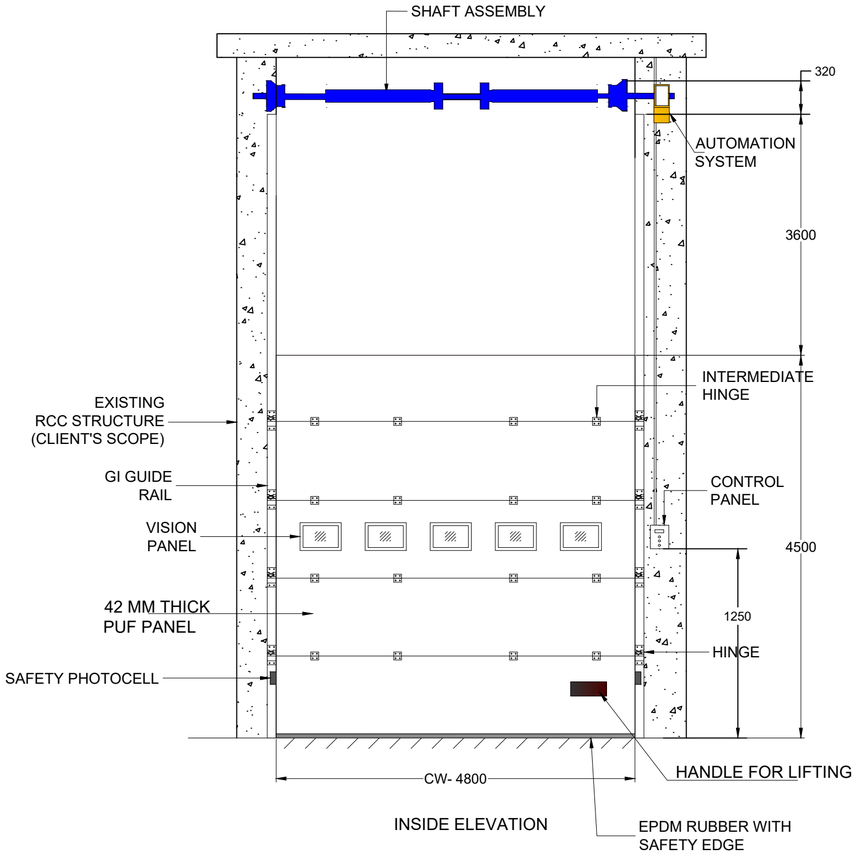
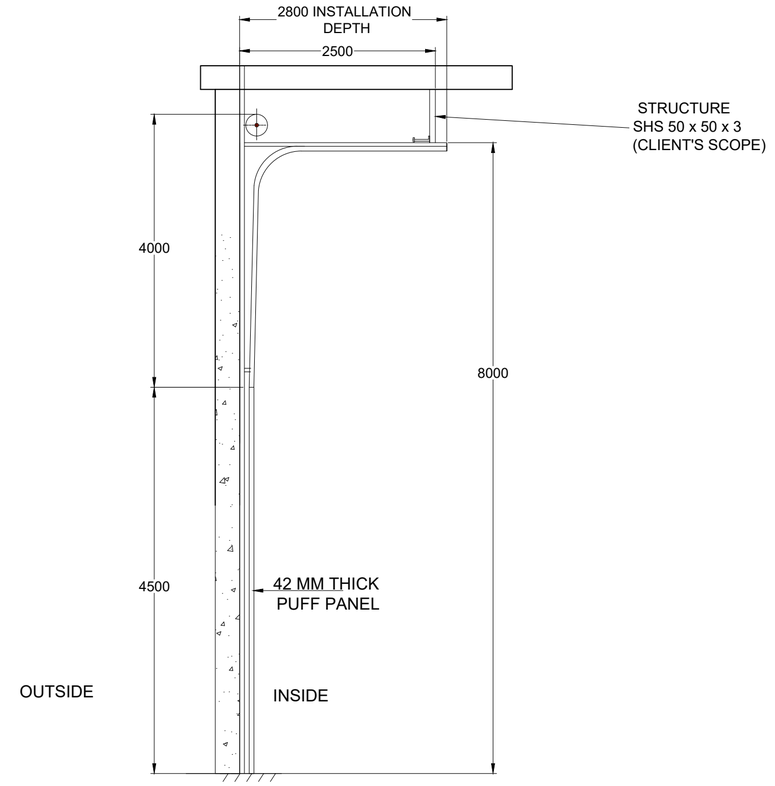
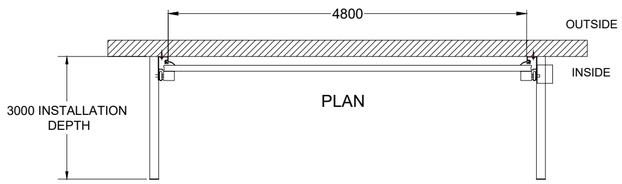


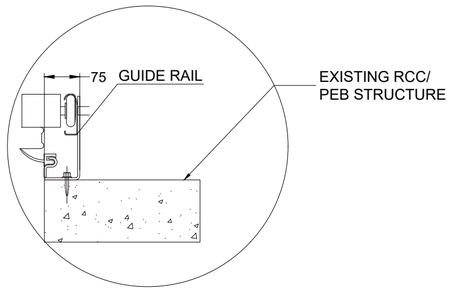

INSIDE ELEVATION




SIDE VIEW




PLAN




TRACK DETAILS

| Rev.no | Revision | Revised BY | Date |
|---|---|---|---|
| 2. | MODIFIED VERTICAL POSITION TO PARTIAL VERTICAL & HORIZONTAL | MAHESH S. | 28/11/2022 |
| 1. | Mentioned title name RS07 | Sujata | 28/12/2021 |

DIMENSION :

| CLEAR WIDTH (CW) | CLEAR HEIGHT (CH) | QUANTITY |
|---|---|---|
| 4800 mm | 4500 mm | 1 NOS |
| | | |
| | | |

TECHNICAL DATA :

| COMPONENTS | MATERIALS | SPECIFICATIONS |
|---|---|---|
| DOOR PANELS | GI & PUF | 42 mm CFC- FREE POLYURETHANE WITH 0.5mm THK, GI PRECOATED PANELS. |
| DOOR HINGE | ——— | HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS |
| SHAFT ASSEMBLY | STD. | TORSIONAL SPRING WITH SHAFT & BEARING PLATES |
| FINISH | | PANELS ARE IN STANDARD RAL 9002 GREY WHITE COLOR |

ACCESSORIES-

1. SAFETY EDGE SENSOR.

IMPORTANT NOTES:

1. REQUIRED STRUCTURE FOR DOOR IS IN CLIENT'S SCOPE.
2. SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
3. ALL CIVIL WORK IS IN CLIENT'S SCOPE.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

VERTICAL LIFTING SECTIONAL DOOR
RS07. North Side

CLIENT'S APPROVAL :

CLIENT - AJAY KALE AND ASSOSIATES

PROJECT -

SITE LOCATION - PIRANGUT

DWG. NO. : NIHVA/21-22/CLT/284 | REV- 00

SCALE: NTS | WT: | SHEET:01 OF 03

| | NAME | DATE | SIGN |
|---|---|---|---|
| DRAWN | G.I.P. | 23.12.2021 | |
| CHECK | A.K. | 23.12.2021 | |
| APPROVAL | | | |

If any queries contact : design@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.