

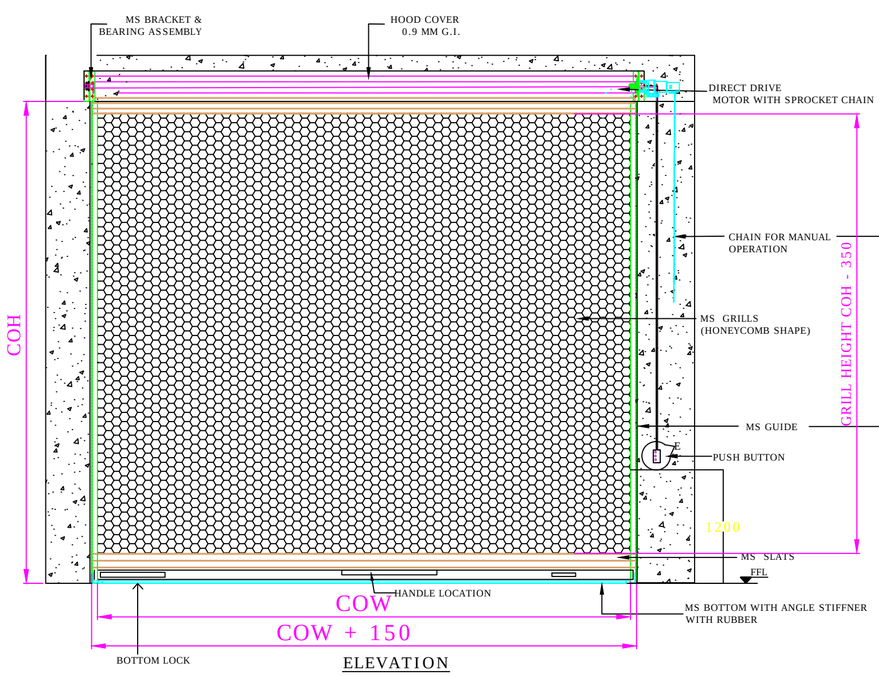


ELEVATION

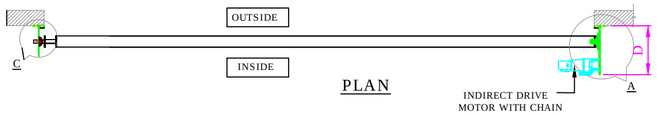


PLAN


INDIRECT DRIVE MOTOR WITH CHAIN FOR MANUAL OPERATION

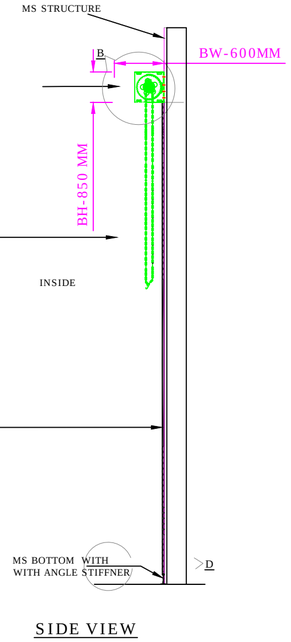


SIDE VIEW

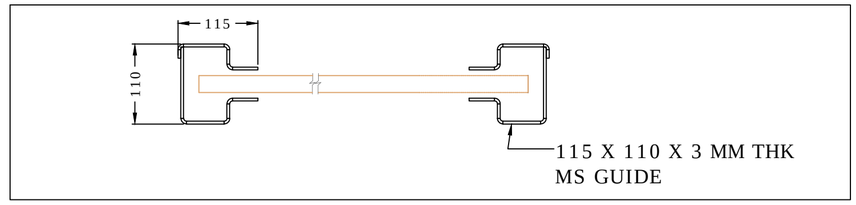


NOTES-
1. MS STRUCTURE & ITS FITTING IS IN CLIENT SCOPE .
2. SPACE OF 550 MM IS REQUIRED ABOVE CLEAR OPENING HEIGHT FOR INSTALLATION OF SHUTTER.
3. CLEAR OPENING HEIGHT AFTER SHUTTER INSTALLATION WILL BE 150 MM LESS THAN WALL OPENING HEIGHT .
4. MANUAL CHAIN IS ONLY USED FOR EMERGENCY OPERATION.
5. REFER RAL SHADE CHART & CONFIRM RAL SHADE FOR PAINTING . (IF ANY OTHER , KINDLY INFORM TO NIHVA).
PRIMER: EPOXY POLYAMIDE BASED ZINC PHOSPHATE PRIMER.

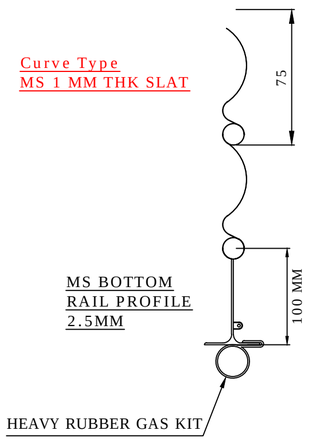

DETAILS : D

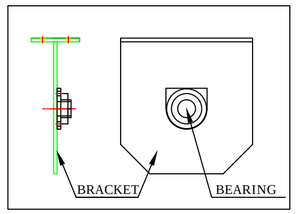

DETAILS : C

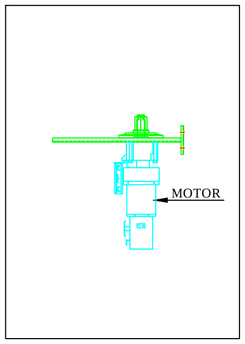

DETAILS : A & B

TECHNICAL SPECIFICATION:
1. MOTOR- DIRECT DRIVE WITH SPROCKET CHAIN, NICE MAKE, IP54 PROTECTION.
2. ACCESSORIES: ADVANCE ACCESS CONTROL, CARD READER ON BOTH SIDES OF DOOR AND PHOTOCELL.

REVISION- R01
1. FULL LENGTH GRILL ADDED.
2. MENTIONED RAL SHADE.
3. SPECIFIED THE MOUNTING OF ROLLING SHUTTER ON MS STRUCTURE.

RAL CODE	SHADE	COLOUR
RAL 9001	CREAM	
RAL 9002	GREY WHITE	
RAL 9010	PURE WHITE	
RAL 5002	ULTRAMARINE BLUE	
RAL 7035	LIGHT GREY	
RAL 7001	SILVER GREY	

SR NO	CLEAR OPENING WIDTH (COW)	CLEAR OPENING HEIGHT (COH)	QUANTITY	RAL COLOR FOR PAINTING
1	4000	4000	2 NOS	

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
MOTORIZED ROLLING SHUTTER WITH GRILL

	NAME	SIGN	DATE
DRAWN	G.I.P.		18.08.2021
CHECK	A.K.		18.08.2021
APPRD.	V.T.		18.08.2021

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - SCON PROJECTS
PROJECT -
SITE LOCATION - NASHIK
If any queries contact :design@nihva.com
DWG. NO. : NIHVA/21-22/0211
REV- 01
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: