


G.A. DRAWING OF SCISSOR LIFT 2000X2000 , 3 TON , LIFT HEIGHT - 1700 MM

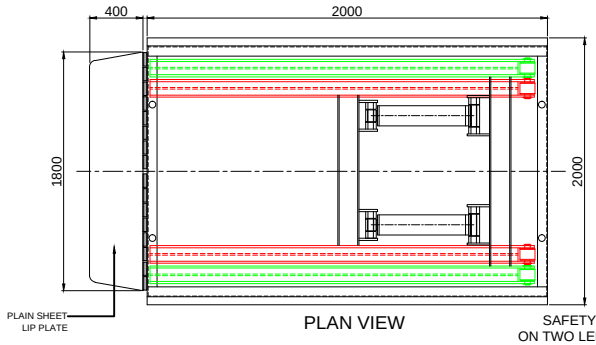


PLAN VIEW

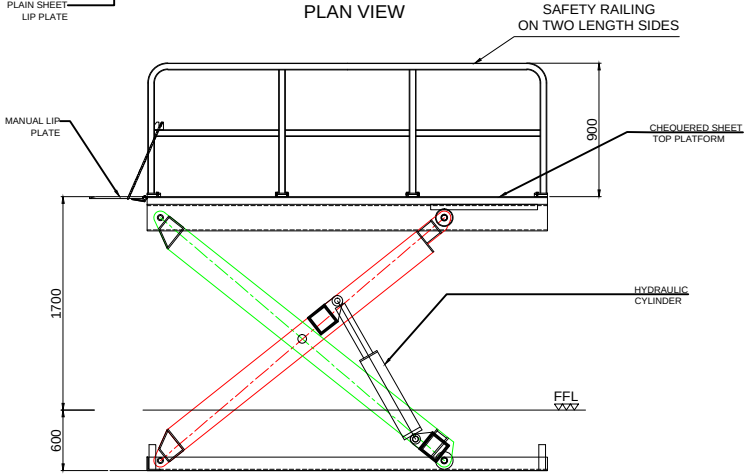


FRONT VIEW - OPEN POSITION OF SCISSOR LIFT

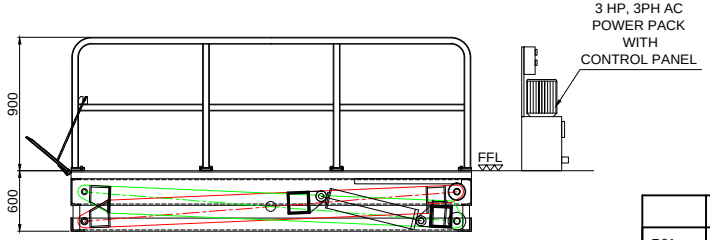

FRONT VIEW - SHUT POSITION OF SCISSOR LIFT

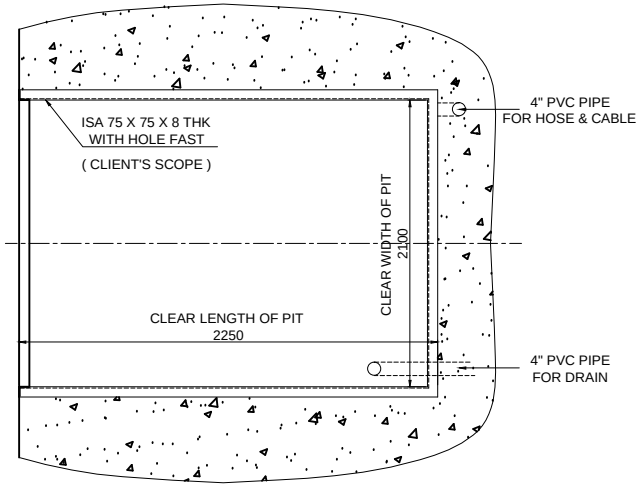

TOP VIEW OF PIT

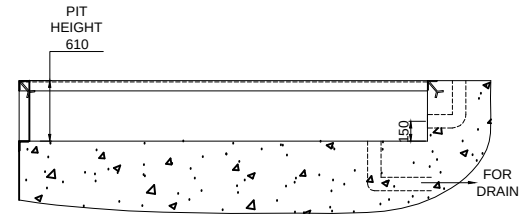

FRONT VIEW OF PIT

NOTES-

1. REQUIRED DUCT , PIT & ALL CIVIL WORK IS IN CLIENT SCOPE .
2. GAP IN PIT IS PROVIDED FOR INSTALLATION OF SCISSOR LIFT & THIS GAP NEED TO BE CLOSED AFTER INSTALLATION & TRIAL OF SCISSOR LIFT AT SITE . TUBE REQUIRED FOR CLOSING GAP IN PIT IS IN CLIENT SCOPE .
3. PIT SURFACE SHOULD BE PLAIN & TAKE UNIFORM DISTRIBUTED LOAD OF 3000 KG.
4. GOLDEN YELLOW PAINT IS NIHVA STANDARD RAL SHADE , IF ANY OTHER PLEASE INFORM .

TOLERANCE - ±10mm

PAINT - RAL 1004 GOLDEN YELLOW

CAPACITY	3 TON
PLATFORM SIZE	2000 (L) X 2000(W)
POWER PACK	3 HP, 3 PH
SHUT HEIGHT	600 MM
LIFT HEIGHT FROM FFL	1700 MM
TOTAL HEIGHT FROM PIT BOTTOM	2300 MM

R01	SMS	13.3.2021	PIT DETAILS CHANGED CAPACITY CHANGED TO 3 TON
REV NO	DRAWN	DATE	REMARK

ALL DIMENSIONS ARE TENTATIVE . DIMENSIONS MAY CHANGES AFTER DETAIL DESIGN.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE: ELECTRO-HYDRAULIC SCISSOR LIFT

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	SIGN	DATE
DRAWN	SIDDHESHWAR	25.1.2021
CHECK	SIDDHESHWAR	25.1.2021
REV.		
APPROVAL		

If any queries contact : nihvacare@nihva.com

ALL DIMENSION ARE IN mm

CLIENT - TOPBAND INDIA PVT LTD
PROJECT - TOPBAND INDIA PVT LTD
SITE - PUNE
DWG. NO. : NIHVA/20-21/0142/R01
SCALE: NTS | WT: | SHEET: 01 OF 01