



DWG.NO: SALT_1729_STR_04_R0

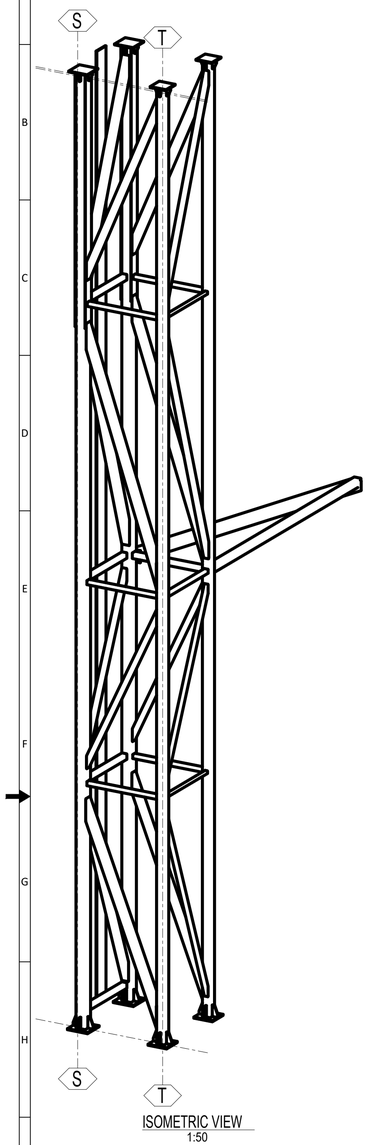



ISOMETRIC VIEW
1:50
















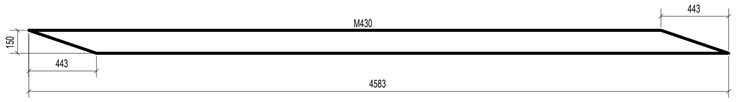













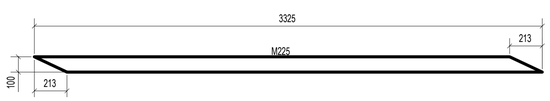




































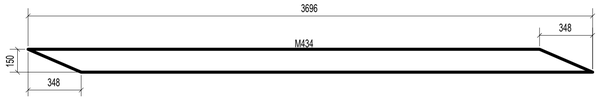








LENGTH AND CONNECTION SHOULD BE CONFIRM AT SITE





LENGTH AND CONNECTION SHOULD BE CONFIRM AT SITE




















CUTTING DETAIL BETWEEN GRID S & GRID T						
PartPos	Profile	No.	Material	Length	Net Weight(kg	Gross Weight(kg)
M1	SHS72.0X72.0X3.2	1	IS2062	3905	24.9	24.9
M2	SHS72.0X72.0X3.2	1	IS2062	3336	21.3	21.3
M6	SHS72.0X72.0X3.2	1	IS2062	1350	9.05	9.05
M19	SHS72.0X72.0X3.2	2	IS2062	1327	8.9	17.8
M20	SHS72.0X72.0X3.2	3	IS2062	1335	8.95	26.85
M117	SHS50*3.6	2	IS2062	1350	7.08	14.16
M137	SHS150*8	1	IS2062	4583	147.65	147.65
M164	SHS180.0X180.0X6.0	1	IS2062	5024	160.11	160.11
M180	SHS180.0X180.0X6.0	2	IS2062	16659	533.95	1067.9
M222	SHS100.0X100.0X6.0	4	IS2062	1320	22.41	89.64
M223	SHS100.0X100.0X6.0	1	IS2062	1335	22.67	22.67
M225	SHS100.0X100.0X6.0	1	IS2062	3325	52.68	52.68
M226	SHS100.0X100.0X6.0	1	IS2062	4613	72.96	72.96
M227	SHS100.0X100.0X6.0	1	IS2062	3907	61.88	61.88
M231	SHS100.0X100.0X6.0	2	IS2062	3325	52.73	105.46
M299	SHS132.0X132.0X4.8	1	IS2062	4800	89.79	89.79
M311	SHS132.0X132.0X4.8	1	IS2062	3940	67.28	67.28
M317	SHS132.0X132.0X4.8	1	IS2062	3680	62.93	62.93
M319	SHS132.0X132.0X4.8	1	IS2062	3948	67.48	67.48
M407	SHS150.0X150.0X5.0	2	IS2062	16659	370.87	741.74
M425	SHS150.0X150.0X5.0	1	IS2062	4669	93.59	93.59
M426	SHS150.0X150.0X5.0	1	IS2062	3924	78.83	78.83
M429	SHS150.0X150.0X5.0	1	IS2062	3993	80.3	80.3
M430	SHS150.0X150.0X5.0	1	IS2062	4583	91.93	91.93
M434	SHS150.0X150.0X5.0	1	IS2062	3696	74.38	74.38
PLT1	PLT8*200	4	IS2062	4442	55.79	223.16
PLT11	PL16*300	2	IS2062	300	11.3	22.6
PLT13	PL16*350	2	IS2062	350	15.39	30.78
PLT17	PL20*350	2	IS2062	350	19.23	38.46
PLT18	PL20*380	2	IS2062	380	22.67	45.34
PLT76	PL10*210	1	IS2062	250	4.12	4.12
PLT121	PL10*100	16	IS2062	200	1.21	19.36
PLT122	PL10*75	12	IS2062	150	0.66	7.92
PLT123	PL10*85	4	IS2062	150	0.77	3.08
PLT124	PLT16*300	1	IS2062	16561	624.02	624.02
	TOTAL					4362.1

NOTES :-

1. ALL DIMENSIONS ARE IN MM & LEVEL ARE IN METER.
2. ALL STRUCTURAL STEEL AS PER IS:2062.
3. PROVIDE WELDING AS PER IS:816.
4. PROVIDE MIN. 6MM WELD WITH MIN. WELD LENGTH OF 150MM.
5. USE ELECTRODS AS PER IS:814 (PT.–I).
6. FILLET/ BUTT WELD SHALL BE OF 6MM SIZE AND SHALL BE CONTINUOUS.
7. FABRICATION AND ERECTION SHALL BE AS PER IS:800 AND IS:803.
8. WELD SHALL BE GROUND SMOOTH.
9. ALL GUSSET PLATES SHALL BE MIN. 10 THK.
10. ALL M.S. BLACK BOLTS AND NUTS SHALL CONFORM TO IS:1363(PT. 1 TO 3).
11. STRUCTURE SHALL BE APPLIED WITH ONE COAT OF RED OXIDE ZINC CROMATE PRIMER AFTER FABRICATION FOLLOWED ONE MORE COAT BEFORE ERECTION. FINALLY APPLY 2 COATS OF SYNTHETIC ENAMAL OF APPROVED QUALITY.

REV.NO.	DESCRIPTION.	REV.DATE	DRAWN.	CHKD.	APPD.
0	DRAWING FOR APPROVAL	27.12.22	AAK	HAB	HAB

DWG.TITLE :- CUTTING DETAIL BETWEEN GRID S & T
DRAWING FOR DOOR FRAME

PROJECT	MEGADOOR INSTALLATION AT HYDRABAD AIRPORT
CLIENT	GMR

SALT Design Services
NIHVA NIHVA TECHNOLOGIES PVT. LTD.

SALT DESIGN SERVICES
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

DRAWN :AAK	CHECKED : HAB	SCALE: 1:100
APPROVED : HAB	JOB CODE. : 1729	DATE: 27.12.2022
DWG.NO: SALT_1729_STR_04_R0	(SH-1OF1)	REV. - R0
		SIZE. - A0

A1 [841 x 594]