NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

HARMAN FINOCHEM LTD
AURANGABAD

Date : 01.01.2021
Quote NO : SQT.20.21.2883R2
Kind Attn : Mr Deepak Ghongane
Email Id : deepakg@harmanfinochem.com
Contact No: 9766124866 / 7045464762

Subject : Revised Quotation for Nihva Make High Speed Door & Insulated Rolling Shutter .

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**Nihva Make High Speed Door**	2500	3000	5	358,000	1,790,000	20,000	100,000
2	**Nihva Make High Speed Door**	2500	5200	2	428,000	856,000	20,000	40,000
3	**Nihva Make High Speed Door**	3000	3000	1	366,000	366,000	20,000	20,000
4	**Insulated MS Motorized Rolling Shutter**	3000	3000	1	256,000	256,000	20,000	20,000
				Total		**3,268,000**		**180,000**
	P&F Charges			3%		**98,040**		
	Total Without Taxes					**3,366,040**		**180,000**
	GST Extra @ 18%			18%		605,887		32,400
	Total With Taxes					**3,971,927**		**212,400**
	Transportation Charges					**Extra at actual**		
	Unloading Charges @ Site					**In Client Scope**		

A-1) Optional Door Accessories (If Required)

Sr No	Product	Qty	Price in INR
1	**Infra red Radar Sensor**	1	35,000


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Nihva Make High Speed Door

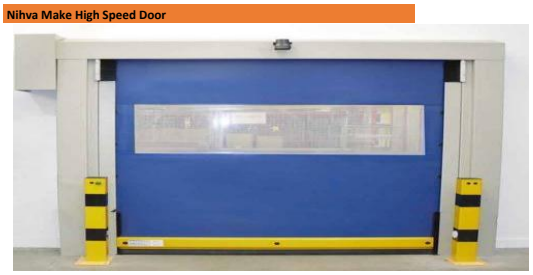

- Light Grey like RAL 7038
- Dark Blue like RAL 5002
- Light Blue like RAL 5005, Blue like RAL 5010
- Green like RAL 6026
- Red like RAL 3020
- Orange like RAL 2008
- Yello like RAL 1003
- Ivory like RAL 1014
- White like RAL 9016

Sr. No	Description	Specifications
1	Application Area	Suitable for Interior door
2	Opening Direction	Vertical
3	Structure	Galvanized steel
4	Colours	9 standard colors - white, yellow, green, orange, red, Light gray, Lvory, Dark blue , Light Blue ,
5	Rolling Up Tube	Made of Aluminium and Self Lubricate Vertical guides
6	Safety	• door Line Photocell on the top • Self-repair function
7	Operation	Operator + control unit
8	Operating speed	Open / Close speed up to max -0.9 m/s
9	Curtain	High resistance polyester , Self-extinguish M2 fire class,with a zipper system and a high wind resistance.
10	Motor Power/ kW	0,45kW
11	Protection	IP 55
12	Drive Unit & Control System	Electrical - TS-970 GFA

Insulated Rolling Shutter (NIHVA Make)



Double Wall Puf Insulated Rolling Shutter
• Thermal Insulation : Shutter infill of 20 mm PU rigid foam ensuring excellent thermal insulation
• Side guide Protection : Black plastic strips on the edge of the side guides protect against abrasion and ensure longevity of shutters
• Closing edge Safety device (only for Motorized) : Sensor controlled safety devices to monitor the bottom edge of the door. Instant stoppage and reversing on encountering any obstruction while closing .
• Sealing : Rubber seals are provided to reduce friction and sound, thereby ensuring a smooth door travel
• Accessories (Optional) : Vision panels for better visibility and light can be provided at extra cost
• Door Curtain : Aluminium curved slats
• Support Brackets : Galvanized steel
• Space Requirement (in mm) : Head room (S) = 675, minimum fitting depth for operator and support brackets (ET) = 450 (Space reqd for removal of cover is 2 times of cover) , Side space requirment (PS) = 210
• Minimum requirement for Building Structure : Concrete = 140 mm (Min strength M10) , Steel = 5 mm, Brick work = 240 mm (Min strength 100 kg/cm^2
• Side Guides : FS 160 A - moulded aluminium guide rails with guide channel, black plastic runner
• Bottom Profile : Extruded aluminium, Double skinned
• Seals : Lintel seal, Bottom seal made of EPDM profile
• Fixing Material : Tested and approved for steel, concrete, brickwork
• Operator : Shaft operator, Ready to fit shaft operator, Power Input - 1 phase current 0.25 kW, Protection category IP65 (jet water protected)
• Control : Integrated microprocessor control along with operator, Adjustable force limit and connection cable with CEE male plug in protection category IP 44, Push button on both side.
• Standard accessories : Chain Hoist and Shoot Bolt - for manual door
• Push Button : For Automatic Door

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price	: Ex Works Pune
Delivery	: 12-13 Weeks for High Speed Door & 8-9 Weeks for Insulated Rolling Shutter from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.
Payment	: 80% Advance along with Confirmed Purchase Order & Balance before dispatch.
Validity	: Validity of Offer is 15 days from the date of quotation
Warranty	: 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Ravindra Kharat -7410169333**

With Best Regards
Pradeep Shinde
7219206333
For NIHVA Technologies Pvt Ltd