

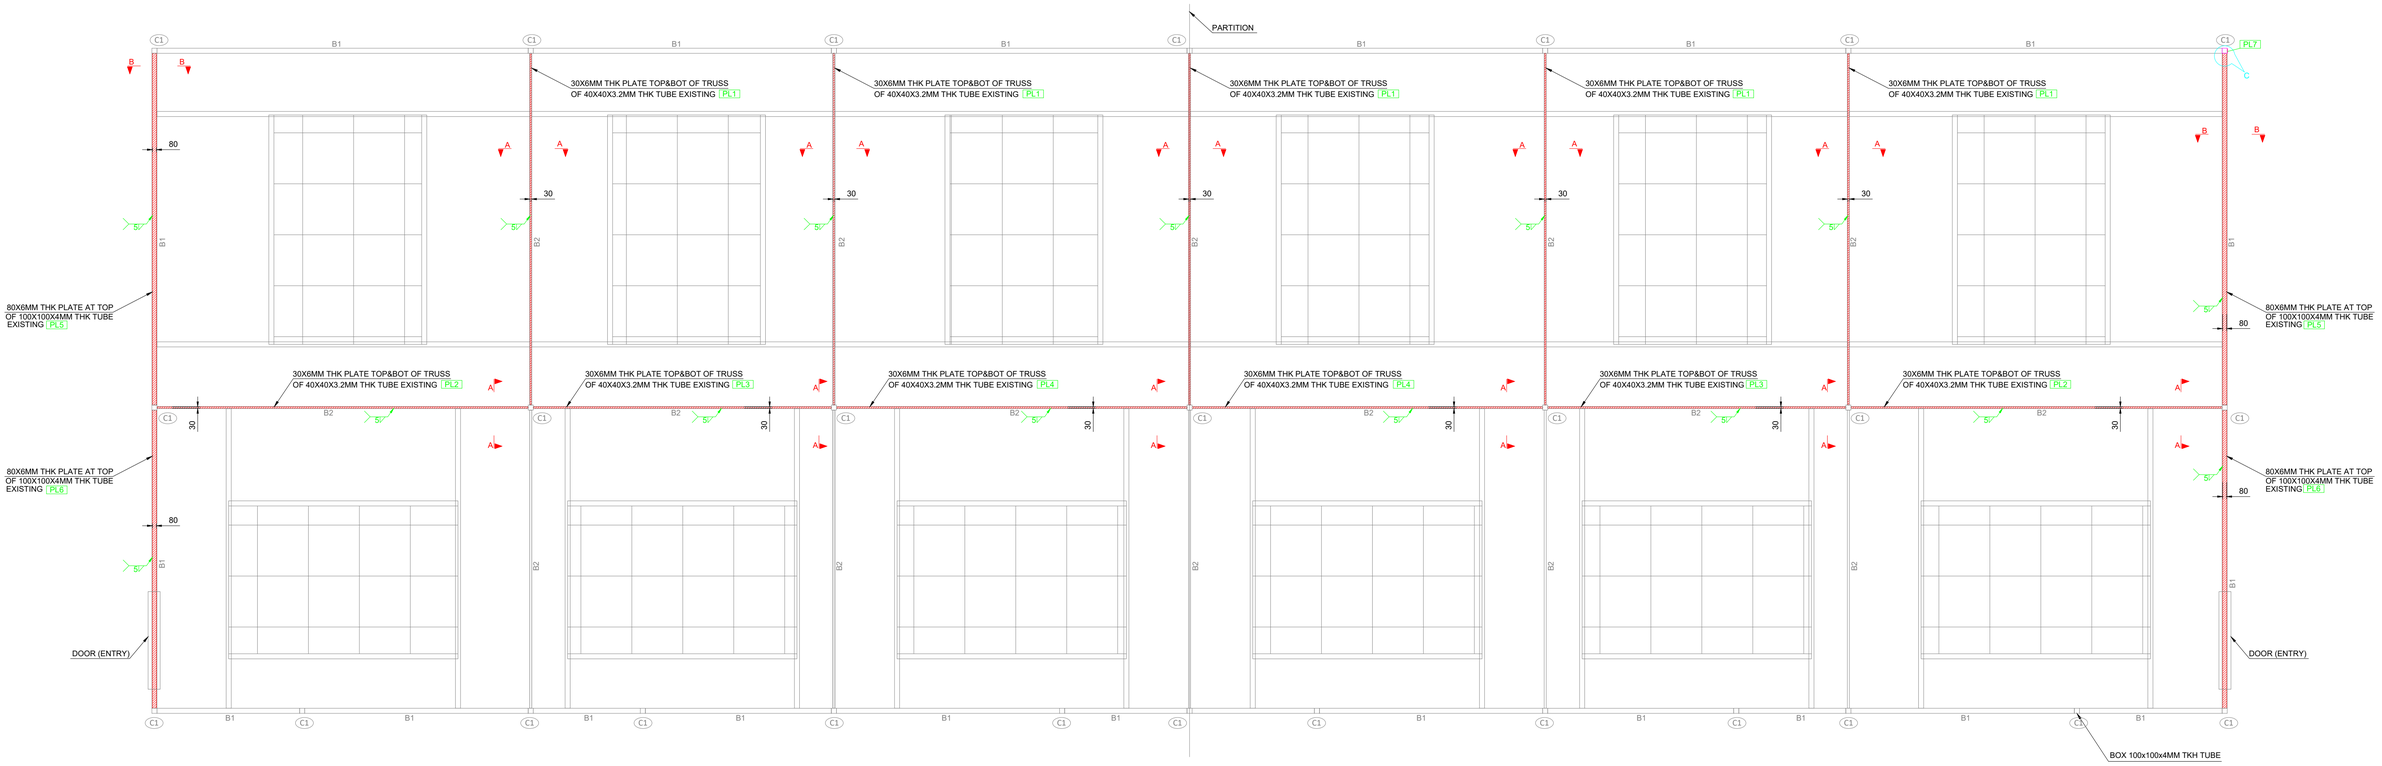



ROOF PLAN

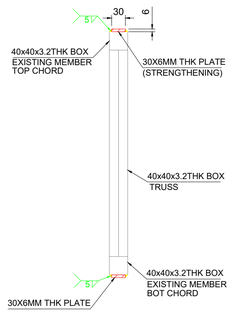

SECTION A-A

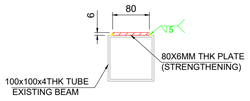

SECTION B-B

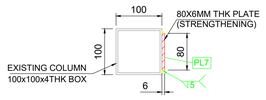

DETAIL - C

QUANTITY FOR HORIZONTAL WINDING MACHINE ROOF								
ITEM No.	DESCRIPTION	WD. mm	LG. mm	UNIT WT. (kg/m)	QTY.	WEIGHT IN kg.		REMARKS
						UNIT	TOTAL	
PL-1	6 thk pl.	30	6900.00	47.10	10	9.75	97.50	PLATE
PL-2	6 thk pl.	30	7285.00	47.10	4	10.29	41.17	PLATE
PL-3	6 thk pl.	30	5850.00	47.10	4	8.27	33.06	PLATE
PL-4	6 thk pl.	30	6880.00	47.10	4	9.72	38.89	PLATE
PL-5	6 thk pl.	80	6900.00	47.10	2	26.00	52.00	PLATE
PL-6	6 thk pl.	80	5850.00	47.10	2	22.04	44.09	PLATE
PL-7	6 thk pl.	80	5050.00	47.10	1	19.03	19.03	PLATE
						Total =	325.73	

GENERAL NOTES :-

1. ALL DIMENSIONS ARE IN MM AND LEVELS ARE IN METERS
2. ALL STRUCTURAL STEEL AS PER IS:2062.
3. PROVIDE WELDING AS PER IS:816.
4. PROVIDE MIN. 5MM WELD.
5. USE ELECTRODS AS PER IS:814 (PT.-I).
6. FILLET/ BUTT WELD SHALL BE OF 5MM SIZE AND SHALL BE CONTINUOUS.
7. FABRICATION AND ERECTION SHALL BE AS PER IS:800 AND IS:803.
8. WELD SHALL BE GROUND SMOOTH.
9. ALL GUSSET PLATES SHALL BE MIN. 5 THK.
10. ALL M.S. BLACK BOLTS AND NUTS SHALL CONFORM TO IS:1363(PT. 1 TO 3).
11. STRUCTURE SHALL BE APPLIED WITH ONE COAT OF RED OXIDE ZINC CROMATE PRIMER AFTER FABRICATION FOLLOWED ONE MORE COAT BEFORE ERECTION. FINALLY APPLY 2 COATS OF SYNTHETIC ENAMAL OF APPROVED QUALITY.

CLIENT - T&R (INDIA) LTD GUJARAT

transformers & rectifiers (india) ltd

NIHVA Technologies Pvt. Ltd.

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

SALT Design Services

SALT DESIGN SERVICES
(ASSOCIATE TO NIHVA TECHNOLOGIES PVT.LTD)

	NAME	SIGNATURE	DATE
DRAWN	S.S.B		24.09.2024
CHK'D	Y.M.J.		04.09.2024
APPV'D	H.A.B		04.09.2024

if any queries contact - supportautomation@nihva.com

ALL DIMENSION ARE IN mm | A1

TITLE - HORIZONTAL WINDING MACHINE STRENGTHENING DETAILS DWG

PRODUCT - TANKING PIT ROOF

SITE LOCATION - GUJARAT

REVISION - REV_00

SCALE - 1.1

SHEET 1 OF 1