NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Ratilal Bhagwandas Construction Company
Pune.

Date : 21.12.2020
Quote NO : SQT.20.21.2894
Kind Attn : Sanjay Mulay
Email Id : rbcc.office1@gmail.com
Contact No: 9881196056

Project Name & Location: Kurkumbh MIDC

Subject : Quotation for Motorised Rolling Shutter, Fire rated Rolling Shutter ,NIHVA make High Speed Door , Sliding Gate

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2,3
C.	General Conditions	4
D.	Terms & Condtions	4

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	GI Motorised Rolling Shutter- Internal	3000	4000	1	145,000	145,000	20,000	20,000
2	GI Motorised Rolling Shutter- Internal	3000	3500	1	138,000	138,000	20,000	20,000
3	GI Motorised Rolling Shutter- Internal	3000	3000	1	130,000	130,000	20,000	20,000
4	GI Motorised Rolling Shutter- Internal	2500	3000	1	123,000	123,000	20,000	20,000
5	GI Motorised Rolling Shutter- Internal	2500	4000	1	135,000	135,000	20,000	20,000
6	GI Motorised Rolling Shutter- Internal	1800	3000	1	112,000	112,000	20,000	20,000
7	GI Motorised Rolling Shutter- External	3000	4000	1	155,000	155,000	20,000	20,000
8	GI Motorised Rolling Shutter- External	3000	3500	1	147,000	147,000	20,000	20,000
9	GI Motorised Rolling Shutter- External	3000	3000	1	140,000	140,000	20,000	20,000
10	GI Motorised Rolling Shutter- External	2500	3000	1	132,000	132,000	20,000	20,000
11	Fire rated Rolling shutter	3000	4000	1	261,000	261,000	20,000	20,000
12	Fire rated Rolling shutter	3000	3500	1	255,000	255,000	20,000	20,000
13	Fire rated Rolling shutter	3000	3000	1	249,000	249,000	20,000	20,000
14	Fire rated Rolling shutter	2500	3000	1	243,000	243,000	20,000	20,000
15	Fire rated Rolling shutter	1800	1800	1	238,000	238,000	20,000	20,000
16	Single Leaf Motorised Sliding Gate	10000	1500	1	413,000	413,000	20,000	20,000
17	Wicket Gate	1500	1500	1	40,000	40,000	10,000	10,000
18	NIHVA Make High Speed Door	3000	4000	1	328,000	328,000	20,000	20,000
19	Additional accessories for High Speed Door	Radar Sensor		1	35,000	35,000		
		Loop Detector		1	35,000	35,000		
		Additional Push Button		1	5,500	5,500		
		Flashing Light		1	7,500	7,500		
		Interlocking Pull Switch		1	20,000	20,000		
		Remote		1	9,500	9,500		
20	Additional accessories for Fire Rated Rolling Shutter	Key Switch		1	5,500	5,500		
		Smoke Detector		1	24,000	24,000		
				Total		**3,526,000**		**350,000**
21	P&F Charges			3%		**105,780**		
	Total Without Taxes					**3,631,780**		**350,000**
	GST Extra @ 18%			18%		653,720		63,000
	Total With Taxes					**4,285,500**		**413,000**
22	Transportation Charges					**Extra at Actual**		
23	Unloading Charges @ Site					**In Client Scope**		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Motorized Rolling Shutter






Sr .No.	Specification	GI Motorized Rolling Shutter
1	**Description:**	Motorised Rolling Shutter with GI Laths with thickness of 1 mm.
2	**Mounting Location area**	Inside area / Outside area
3	**Mounting Surface**	On Concrete /Steel
4	**Curtain Panel**	The panel made of 1.0mm thick GI.
5	**Curtain panel size**	75mm wide
6	**Curtain Profile**	Curved
7	**Bottom Profile**	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	**Side Guide Profile**	M.S." U" Shaped profile
9	**Roller Shaft**	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	**Side Brackets**	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
11	**Hood Cover**	Made of GI Sheet Thickness 0.9 mm
12	**Surface finish**	Powder Coating
13	**Drive Unit & Mounting Type**	Electric Motor - Indirect Mounting - Sprocket chain arrangement – IP54 Protection

NIHVA Make High Speed Door

- Safe & for continous operations
- Self Supporting Construction with anti crash protection system for bottom profile
- Smooth & silent opening & closing
- Can be equipped with full vision PVC curtain
- Modular Interchaegable panels permit to replace worn & damged panels

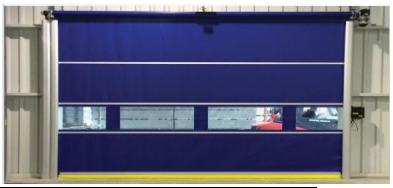

Sr. No	Description	NIHVA Make High Speed Door
1	Use	Internal Door
2	Control Panel	4 Push Button operated
3	Security Features	EN 13241-1 Standard
4	Resistance to wind load	EN12424 upto class 1
5	Curtain	Fabric Transparent PVC section
6	Guide Material	Aluminum
7	Hood Cover	GI
8	Motor Cover	GI
9	Operator & Control	German Make Motor
10	Connecting Voltage	220V , 1Ph , N
11	Open-Stop-Close Button	Standard
12	Protection Category	IP 54 / IP 65
13	Power Consumption	0.75 kw Motor
14	Emergency Off Button	Standard
15	Closing Zone Monitoring	Optical Safety edge
16	External Route Monitoring	Photocell
17	Emergency Opening	Crank Handle

Motorised Single Leaf Sliding Gate

Sr .No.	Specification	Motorized Single Leaf Sliding Gate
1	**Door type**	Motorized Single Leaf Sliding Gate
2	**Opening Direction**	Horizontal - from left to right or reverse
3	**Mounting Location area**	Inside area
4	**Design Pattern**	Standard Tubular Design Pattern
5	**Outer Tube**	100 x 100 x 3.6 mm THK SQ. TUBE
6	**For Post**	100 x 100 x 3.6 mm THK SQ. TUBE
7	**Innear Tube**	50 x 50 x 2.6 mm THK SQ. TUBE
8	**Gap Between Tubes**	125mm
9	**Bottom Rail on ground**	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
10	**Bottom Rollers**	Heavy Duty Bottom Wheel With both side Bearings (chorme plated)
11	**Guide Rollers supporter during Gate**	Nylon Rollers with Bearings both side mounted on column for support smooth
12	**Painting**	2 Coats of EPOXY polyamide based enamel finish of approved colour
13	**El motor make**	BFT – Italy (100% imported)
14	**Emergency Operation**	Manual after turn the switch
15	**Operating Switch**	Push Button from inside , Remote
16	**Safety**	Photocells, Flashing Light

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

Wicket Gate

Sr .No.	Specification	Wicket Gate
1	**Door type**	Manual Single Leaf Wicket Gate
2	**Size considered**	Clear opening - (W)1200 mm x (H)1800 mm
3	**Mounting Location area**	Inside area
4	**Design Pattern**	Standard Tubular Design Pattern
5	**Outer Frame Tube Sizes**	100 x 100 x 3.6 mm THK SQ. TUBE
6	**Internal Vertical Tube Sizes**	50 x 50 x 2.6 mm THK SQ. TUBE
7	**Gap Between Tubes**	100 mm C/C
8	**Painting**	2 Coats of EPOXY polyamide based enamel finish of approved Colour
9	**Operation**	Manually Opening

2 Hrs. Fire Rated Rolling Shutters

Sr .No.	Specification	2 Hour Fire Rated Rolling Shutter
1	Certification	BS 476 Part 22 & MS 1073 Part 3 1988 Tested in Warrington Fire Reasearch Centre UK & Sirim Malasiya
2	Test	UL - 10B Tested
3	Shutter Slats	Zinc coated steel solid slats
4	Shutter Curtain	Roll formed from 1st grade BHP Zincalume steel SKB-A7 curve slat curtain
5	Guide Rail	Fabricated from hot-dipped galvanised steel of 3.0 mm with one piece design surface mounted type.
6	Bottom Bar	Assembled of 2 Pieces of 38 x 38 x 3 mm galvanised steel angle bolted 800 mm pitch with galvanised bolts and nuts or 2 pieces of 40 x 40 x 6 mm steel flat bar.
7	Shutter Enclosure Box	Pressed Galvanised steel sheet to suite box size comply to fire test approved thickness.
8	Operation Control	Gear motor with Thermal protector, limit switches, manual overide, c/w push button switch with keys lockable.
9	Motor Drive Unit	Power Source: 110v 60Hz 1 phase 220v 6OHz 1 phase 230v 50Hz 1 phase 400v 50Hz 3 phase Manual Chain Override One unit push button switch Gravity drop level Auto close by relay switch after receive of 24vdc fire signal
10	Fire Mode	Fire Shutter will auto close via upon receiving of 24VDC fire signal

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	
1	Secured and fully covered Store area to keep the material	
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	
3	Electrical Supply on the site single phase/three phase points at different places.	
4	Any civil / masonry/structural work required	
5	All structure support required	
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	
7	Conduits, Cables required	

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 9-10 Weeks for High Speed door , Fire Rated Rolling Shutter & 5-6 weeks for Rolling Shutter and Sliding Gate from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% along with confirmed purchase order & Balance before dispatch

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Bhavin Jain on 8551092333**

With Best Regards
Pradeep Shinde
7219206333
For NIHVA Technologies Pvt Ltd