
DOCK LEVELER

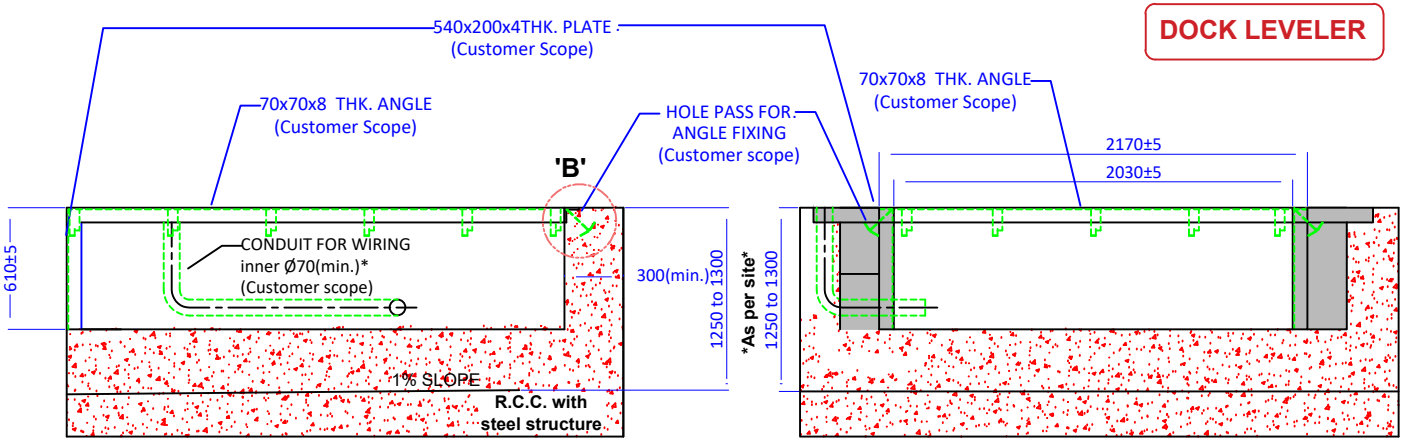

SECTION VIEW A,A

ELEVATION

WORK TO BE CARRIED OUT BY CUSTOMER...

UNLESS IN ADVANCE OTHERWISE IS AGREED IN WRITING.


1. Supply and fix pit edge angles (∠70x70x8) and steel plate 4mm.
2. Provide suitable mounting sources for bumpers , dimensions BE X BH.

- Electrical supply required to be : (For electro-hydarulic operated dock levelers)


3. 70mm dia duct into pit for electrical connections between dock leveler and control panel.
4. 400v 3-phase neutral and earth terminating in isolator fixed in position swown.
5. Provide suitable mounting surface for control panel, dimensions CPWxCPH.

OTHER :


6. Place yellow/Black diagonally striped pit marking.
7. Hydra & welding in customer scope.

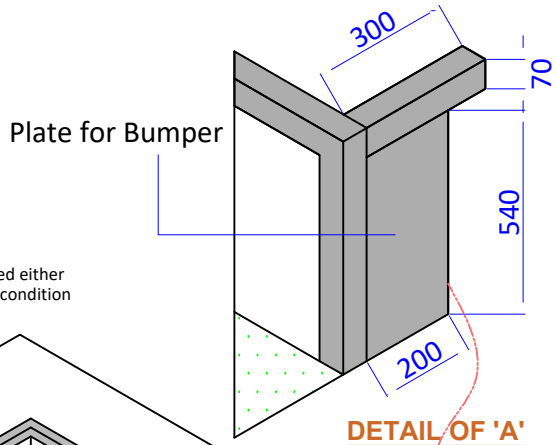

DETAIL OF 'A'
Plate for Bumper

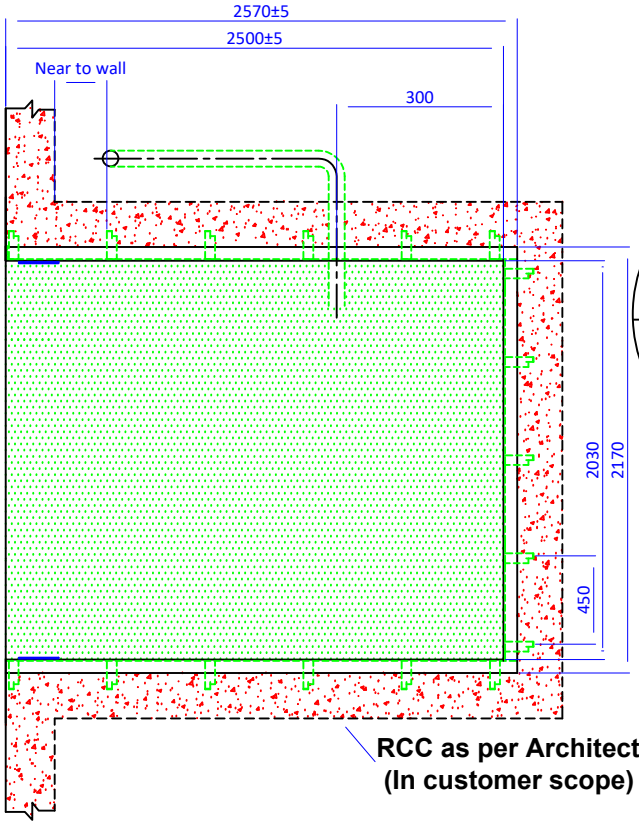


PLAN

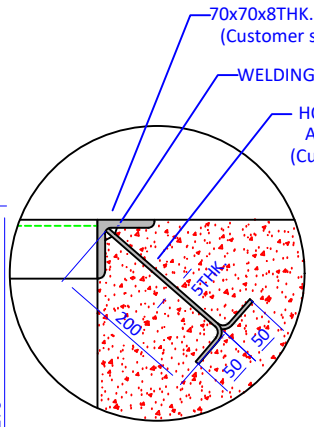

DETAIL OF 'B'

Conduiting for power supply can be placed either side of the wall depending upon the site condition

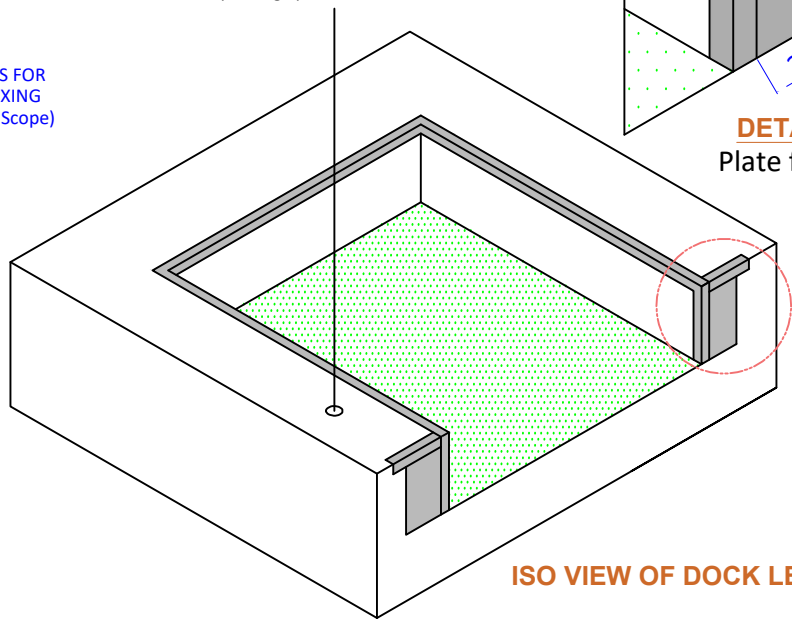

ISO VIEW OF DOCK LEVELER PIT

*** Platform height depends upon Vehicle fleet sizes.**

- Required mains supply: 3/N/PE AC 50 Hz 400V/ CEE 16A for 1.8 kW motor

NIHVA

187, G-Block,
Thermax chowk,
MIDC Chinchwad,
Pune - 411019
+91 8551091333
sales@nihva.com

Projection	Drawn J.P	Chkd S.B	Project	STANDARD SITE FINISH REQD DWG. OF DOCK LEVELER
	Date 10/11/2025	Ch.date 10/11/2025		
	Scale NTS	Tol. ± 2 mm		
	Dim. mm	Config XXXXX		Sheet 1 of 1

This drawing contains confidential information and is the property of NIHVA.
Without whose permission it may not be copied, shown or handed to a third party or otherwise used

Description	SITE FINISH REQUIRED FOR DOCK LEVELER INSTALLATION		Format: A4
Title	DOCK LEVELER PIT	Drawing no. DLP-2000X2500	Rev. 00