


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2500	3000	560	400	200X300X100

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2550	3025	565	

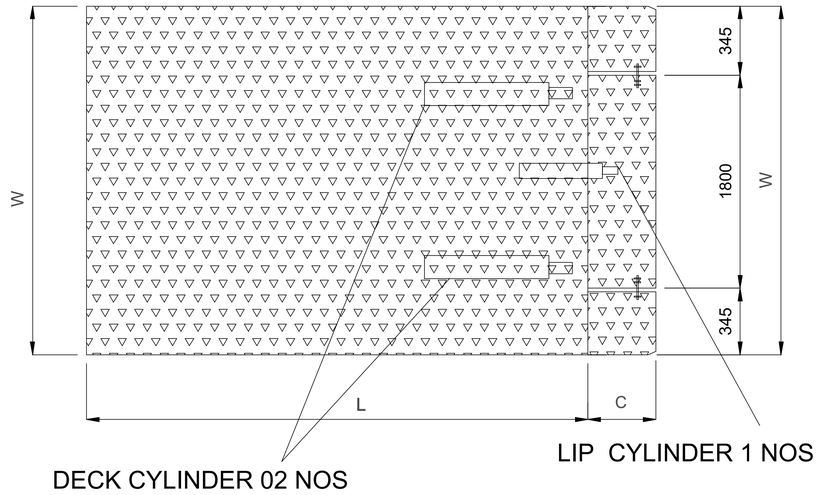


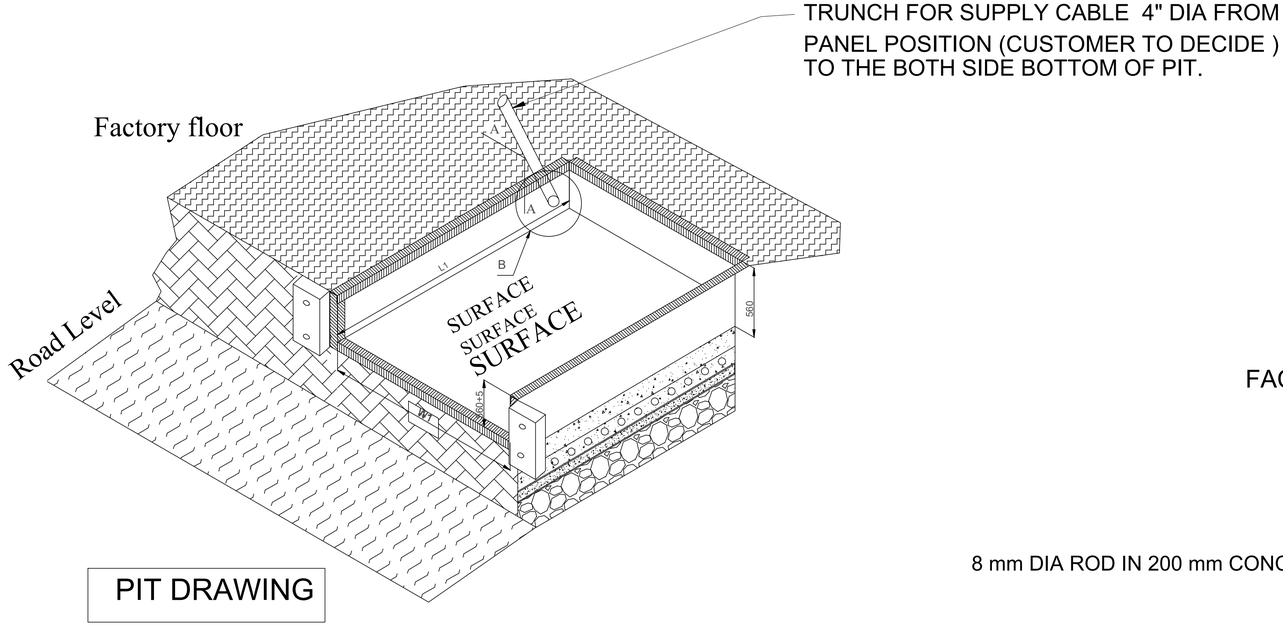


PIT DRAWING

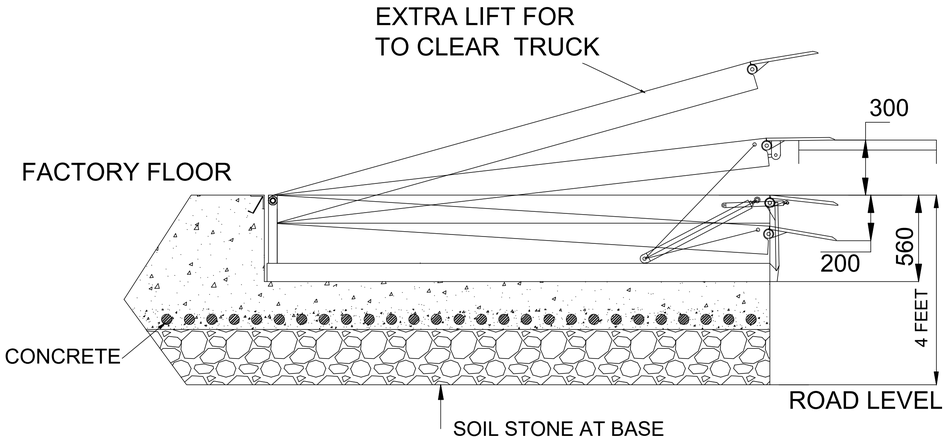

Motor - 1 H.P & Control Panel should be flame proof.

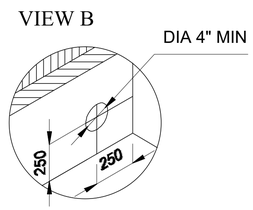

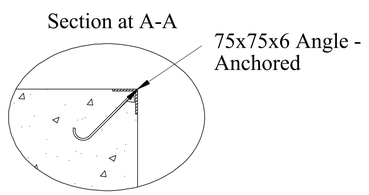

01	20.08.22	M.S.	PIT SIZE CHANGE.
REV NO	DATE	DRAWN	REMARK

NOTE:
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM
5. 1 HP POWER-PACK AND PANEL SHOULD BE MOUNTED SEPERATELY WITH HOSES - 5 MTRS. AND CABLES - 5 MTRS.

DOCK LEVELER- 09 TON CAPACITY - 01 NO

IMP NOTE: -
1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

72/(5$1&(PP

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
DOCK LEVELER - 9MT

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES
PVT. LTD. PUNE
Tel : 020 66304033
Website:- www.nihva.com
Email:- info@nihva.com

	NAME	SIGN	DATE
DRAWN	MAHESH S.		20.08.2022
CHECK	MAHESH S.		20.08.2022
APPRD.	AMIT K.		20.08.2022

CLIENT -Aegis Infra Solutions
PROJECT -
SITE LOCATION -
If any queries contact : design@nihva.com
DWG. NO. - NIHVA/22-23/CLT/0112
REV- R01
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: 01 OF 01