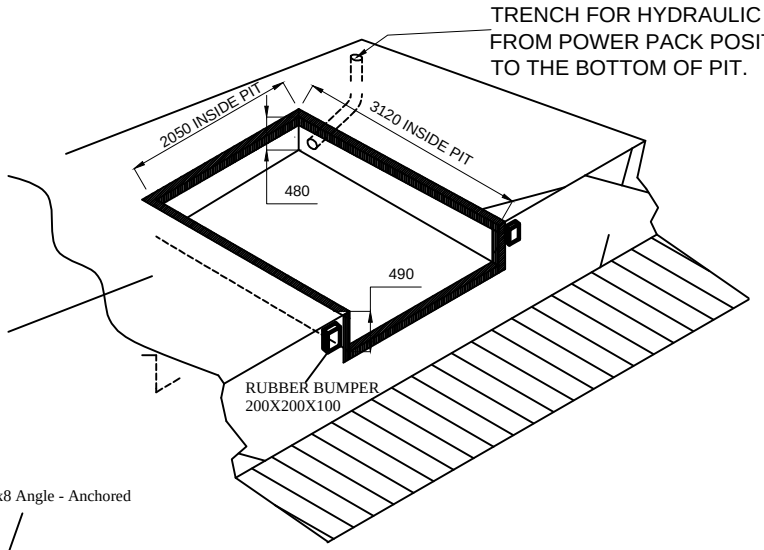

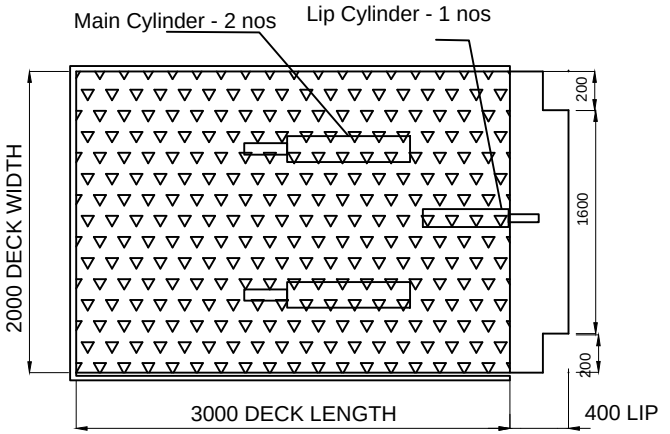

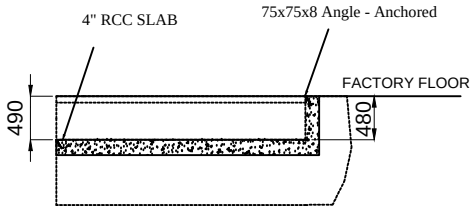

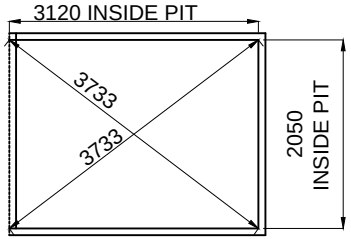

VIEW B

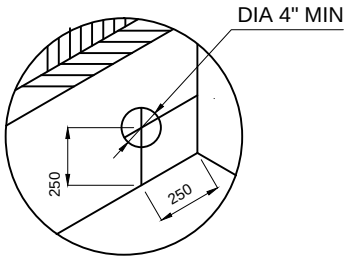

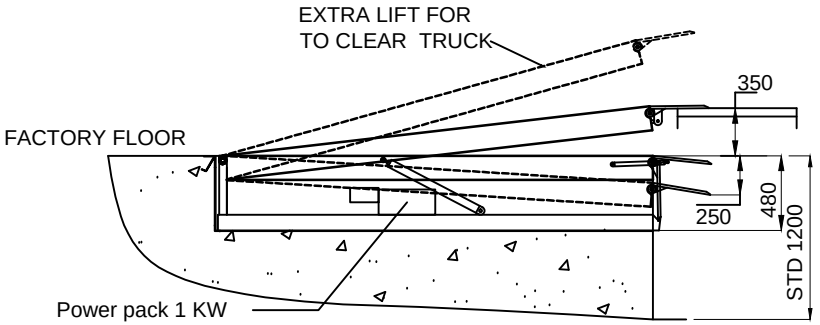

NOTE:
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY HOSE LENGTH STD 3000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 18000 KGB FLOOR LOADING
4. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE +- 10 MM
5. PIT DUCT FOR HOSES & ALL CIVIL WORK IS IN CLIENT SCOPE.

SPECIFICATION OF DOCK LEVELER:
1. PLATFORM SIZE- 2000W X 3000L
2. LIFT ABOVE- 350 MM
3. LIFT DOWN- 250 MM
4. PIT SIZE- 2050W X 3120L X 480D
5. CAPACITY 6 TON POINT LOAD 15 TON UDL
6. FINISH- HOT DEEP GALVANISING
7. QTY- TOTAL 4 NOS OF DOCK LEVELER (2NOS FOR PHASE 1 & 2 NOS FOR PHASE 2)
8. HYDRAULIC POWER PACK- 1 KW, 3 PHASE AC, 50 HZ

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE: PIT MOUNTED ELECTRO-HYDRAULIC DOCK LEVELER			NIHVA TECHNOLOGY PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	SIGN	DATE	NIHVA TECHNOLOGIES PVT. LTD.
DRAWN	S.S.	17.7.2021	CLIENT - SHUBHSHREE ENGINEERING
CHECK	A.K.	17.7.2021	PROJECT - E+H
APPROVAL	V.T.	17.7.2021	SITE - AURANGABAD
REV.	01	03.9.2021	DWG. NO. : NIHVA/21-22/044/DL
If any queries contact : design@nihva.com			SCALE: NTS | WT: | SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			