



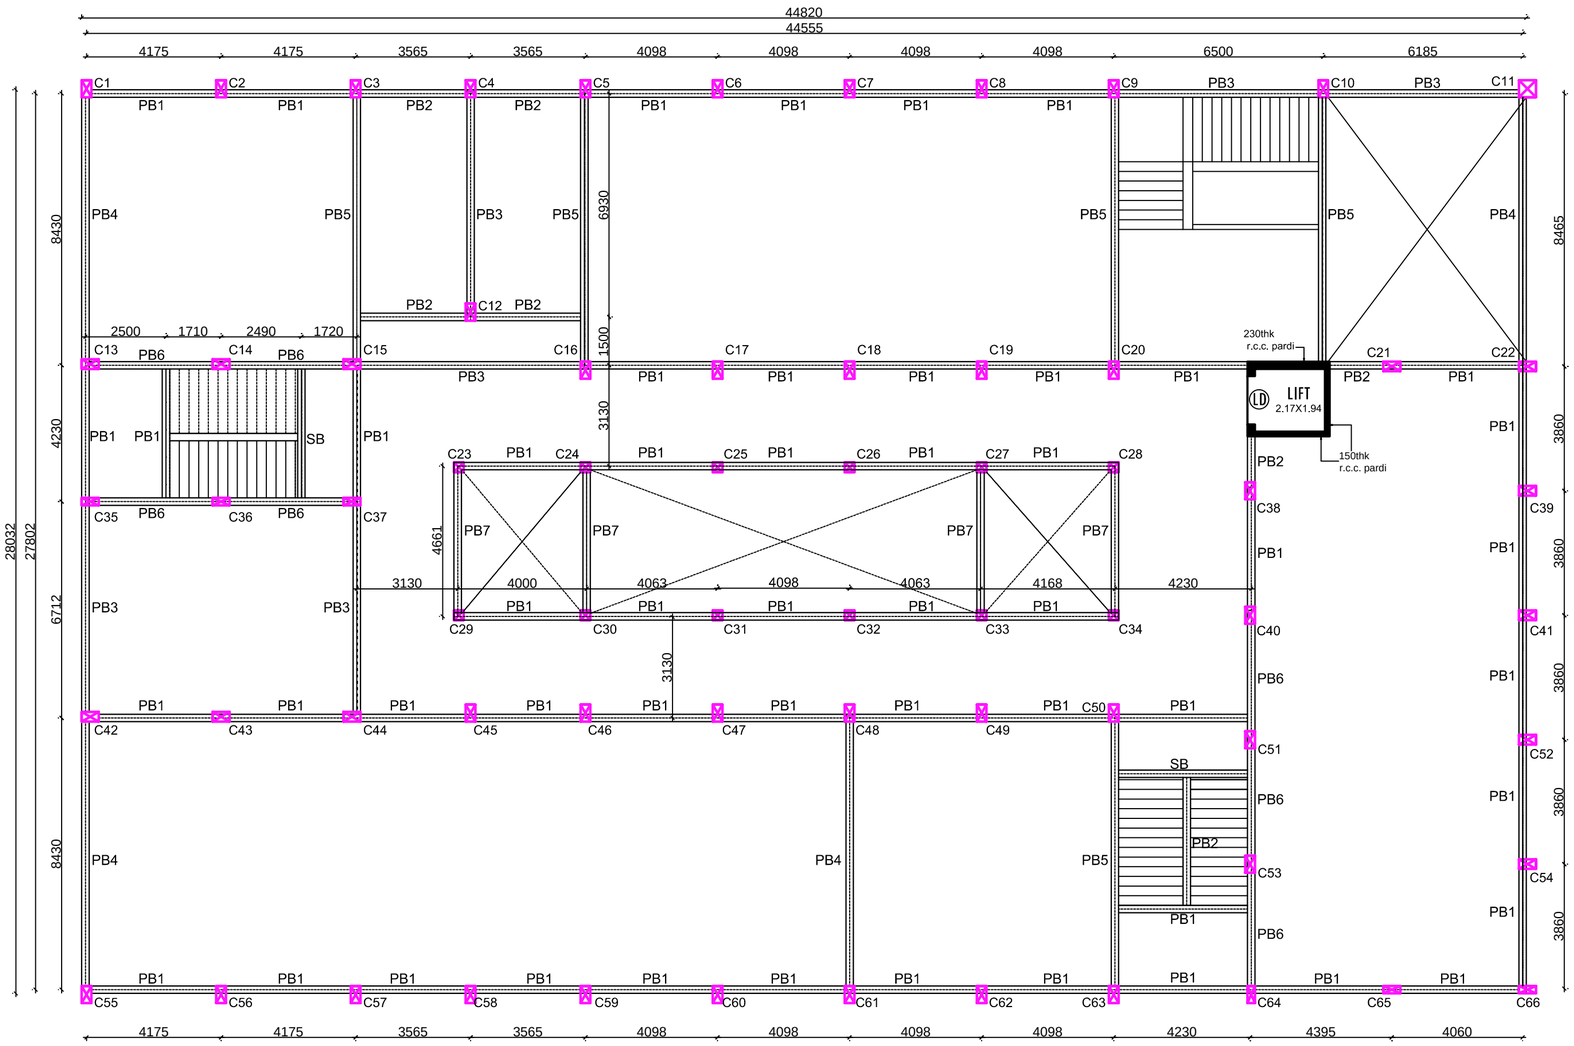


CENTER LINE PLAN OF PLINTH BEAMS

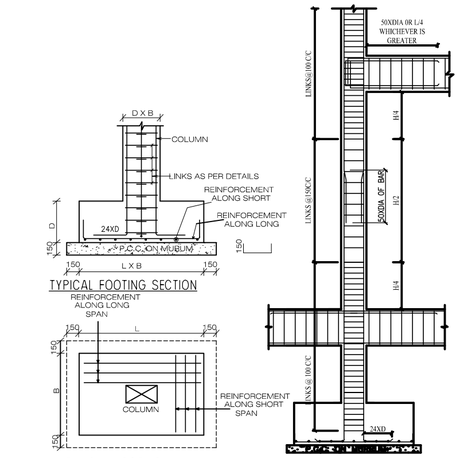

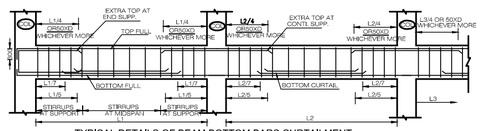



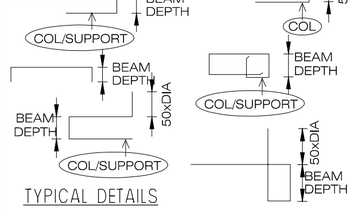

SCHEDULE OF R.C.C. COLUMNS AND FOOTINGS(G+2)

COLUMN MKD.	C1,2,3,4,5,6,7,8,12,13,14,15,16,17,18,19,20,21,22,38,39,40,41,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,60,61,62,63 (a+b) THROUGHOUT	C9,10,42,43,44 (a+b) THROUGHOUT		C23 TO C34 (a+b) THROUGHOUT	C35,36,37 C64,65,66, (a+b) THROUGHOUT
LINKS (REF. DETAIL)	8-HT @ 100/ 150 /100	8-HT @ 100/ 150 /100		8-HT @ 100/ 150 /100	8-HT @ 100/ 150 /100
REINFORCEMENT	4 - 16HT+4 - 12HT	8 - 16HT		6 - 12HT	8 - 12HT
SIZE 2ND TO THIRD SLAB	300 X 530	300 X 530		300 X 300	300 X 530
COLUMN MKD.	C1,2,3,4,5,6,7,8,12,13,14,15,16,17,18,19,20,21,22,38,39,40,41,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,60,61,62,63 (a+b) THROUGHOUT	C9,10,42,43,44 (a+b) THROUGHOUT		C23 TO C34 (a+b) THROUGHOUT	C35,36,37 C64,65,66, (a+b) THROUGHOUT
LINKS (REF. DETAIL)	8-HT @ 100/ 150 /100	8-HT @ 100/ 150 /100		8-HT @ 100/ 150 /100	8-HT @ 100/ 150 /100
REINFORCEMENT	4 - 16HT+4 - 12HT	10 - 16HT		6 - 12HT	4 - 16HT+4 - 12HT
SIZE 1ST TO 2ND SLAB	300 X 530	300 X 530		300 X 300	230 X 530
COLUMN MKD.	C1,2,3,4,5,6,7,8,12,13,14,15,16,17,18,19,20,21,22,38,39,40,41,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,60,61,62,63 (a+b) THROUGHOUT	C9,10,42,43,44 (a+b) THROUGHOUT	C11 (a+b+c) THROUGHOUT	C23 TO C34 (a+b) THROUGHOUT	C35,36,37 C64,65,66, (a+b) THROUGHOUT
LINKS (REF. DETAIL)	8-HT @ 100/ 150 /100	8-HT @ 100/ 150 /100	8-HT @ 100/ 150 /100	8-HT @ 100/ 150 /100	8-HT @ 100/ 150 /100
REINFORCEMENT	8 - 16HT	12 - 16HT	12 - 16HT	8 - 12HT	8 - 16HT
SIZE FOOTING TO 1ST SLAB	300 X 530	300 X 530	530 X 530	300 X 300	230 X 530
FOOTING REINFORCEMENT ALONG SHORT	15 - 10HT	17 - 10HT	15 - 10HT	10 - 10HT	14 - 10HT
FOOTING REINFORCEMENT ALONG LONG	13 - 10HT	15 - 10HT	15 - 10HT	10 - 10HT	12 - 10HT
FOOTING SIZE (L X B X D)	1800 X1600 X 700	1950X1850 X 750	1800 X1800 X 700	1300 X1300 X 450	1650 X1450 X 550
COLUMN NO.	C1,2,3,4,5,6,7,8,12,13,14,15,16,17,18,19,20,21,22,38,39,40,41,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,60,61,62,63	C9,10,42,43,44	C11	C23 TO C34	C35,36,37 C64,65,66,
FOOTING GROUP	A	B	C	D	E

SCHEDULE OF R.C.C. PLINTH BEAMS

BEAM N0.	SIZE		BOTTOM REINFORCEMENT		TOP REINFORCEMENT			SHEAR LINKS			REMARKS
	B	D	BOTT. FULL	BOTT. CURT. L/7	TOP FULL	EXTRA TOP AT CONT. SUPP.	EXTRA TOP AT END SUPP.	END ONE	END TWO	AT MID SPAN (NOMINAL STIRRUPS)	
PB1	230	450	2-12	1-12	2-10	2-12	-	Ø 6 @150 C/C	Ø 6 @150 C/C	Ø 6 @175 C/C	
PB2	230	375	2-12	1-12	2-10	2-12	-	Ø 6 @150 C/C	Ø 6 @150 C/C	Ø 6 @175 C/C	
PB3	230	600	3-16	2-16	2-12	2-16	2-16	8HT @ 150C/C	8HT @ 150C/C	8HT @ 200C/C	
PB4	230	750	3-16	2-16	2-12	2-16	2-16	8HT @ 150C/C	8HT @ 150C/C	8HT @ 200C/C	PROVIDE SKIN BAR 1-10 ON EACH FACE OF BEAM AT- MID DEPTH
PB5	230	750	4-16	2-16	2-12	2-16	2-16	8HT @ 150C/C	8HT @ 150C/C	8HT @ 175C/C	PROVIDE SKIN BAR 1-10 ON EACH FACE OF BEAM AT- MID DEPTH
PB6	230	500	3-16	2-16	2-12	2-16	-	8HT @ 150C/C	8HT @ 150C/C	8HT @ 175C/C	
PB7	230	450	3-12	2-12	2-10	-	2-12	8HT @ 150C/C	8HT @ 150C/C	8HT @ 200C/C	
SB	230	500	3-16	1-16	2-12	-	2-12	8HT @ 150C/C	8HT @ 150C/C	8HT @ 200C/C	STAIR CASE BEAM

PROJECT:-

PROPOSED INSTITUTIONAL BUILDING FOR SHRI BALESHWAR SHIKSHANIK & KRUSHI VIKAS FOUNDATION AT VILLAGE MALWADI TAL-SANGAMNER DIST- AHMEDNAGAR

LAST MODIFICATION DATE :
LAST REVISION MARKED : R1

NOTES

1. CONCRETE GRADE TO BE M20(UNLESS NOTED)
2. CONCRETE COVER TO MAIN BARS. SLAB..15, BEAM..25, COLUMN..40, FOOTING..50.

2(a) BEARING CAPACITY ASSUMED 35MT / M2.

3. LEGEND
   HT - TOR STEEL, Ø - MILD STEEL,
   A.B.BENT- ALTERNATE BARS BENT UP,
   S.S. - SHORT SPAN, L.S.-LONG SPAN
4. EXTRA TOP BAR OVER SUPPORT FOR CANTILEVER LENGTH SHALL BE DOUBLE THE LENGTH OF CANTILEVER PLUS 230 OR CANTILEVER LENGTH + 50XD + 230 WHICHEVER IS GREATER
5. FOR BEAM TOP & BOTTOM BAR TO BE ANCHORED IN END SUPPORT, MINIMUM 300
6. LEAVE DOWELS FROM BEAM BOTTOM FOR LOFT & CHAJJA, IF ANY.
7. WE SHALL NOT REMAIN RESPONSIBLE FOR QUALITY OF CONCRETE, SHUTTERING AND FAULTY WORKMAN SHIP

ARCHITECTURAL CONSULTANT :

DRAWING TITLE : COLUMN FOOTING & PLINTH BEAM DETAILS,

OWNER'S SIGN.

ENGINEER'S SIGN.

ASHWATTHA
DESIGN STUDIO
NAVI MUMBAI | PUNE | AHMEDNAGAR
Registered Office : Office no.19, 2nd floor, Bhosale Shinde arcade, J M Road, Deccan, Pune 411005
Email: rohit3022salunke@gmail.com
Cont.no : 7620603634

SCALE - N.T.S	DATE - 08 Jan 2022
DRN BY - ASAD	CKD. BY. - A.B.S