


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPER SIZE (OPTIONAL)
	2000	3000	600	500	200X300X100


PIT DIMENSION (NIHVA FAB.) OPTIONAL	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2030	3100	605	
PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	3100	605	




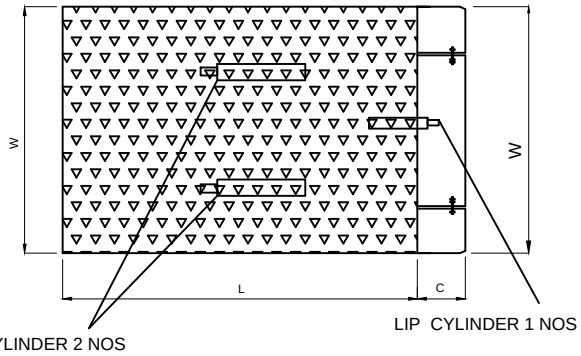

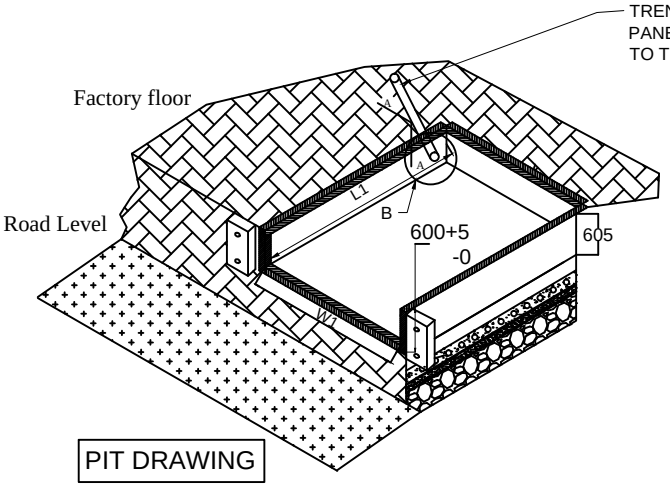

PIT DRAWING



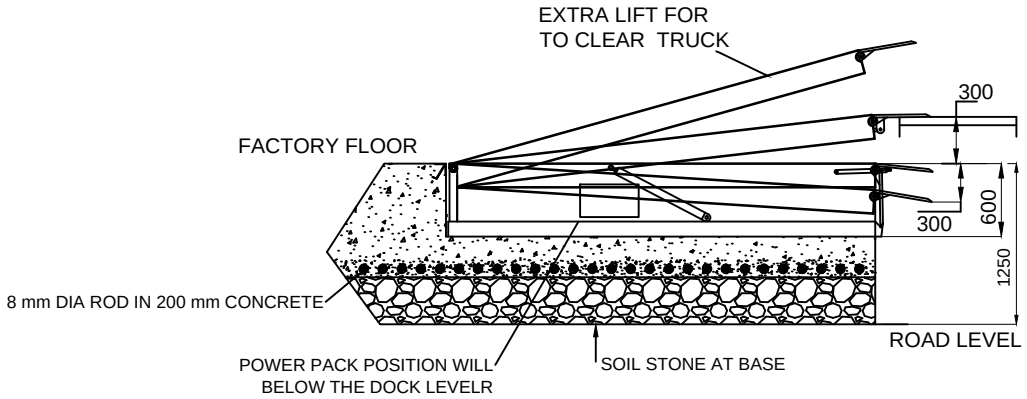

DOCK LEVELER- 10 TON CAPACITY

SIZE:

WIDTH	HEIGHT	QUANTITY

CAPACITY : 10 TON

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

DOCK LEVELER

CLIENT'S APPROVAL :

CLIENT - MW HIGH TECH PROJECTS INDIA PVT.LTD.

PROJECT -

SITE LOCATION -

DWG. NO. : NIHVA/16-17/141

SCALE: NTS	WT:	SHEET:1 OF 1
DRAWN BY: OMKAR		DATE: 15-02-2017
CHECKED BY : SAGAR P.		DATE: 15-02-2017
APRROVED BY: R.K.		DATE: 15-02-2017

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGN IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.