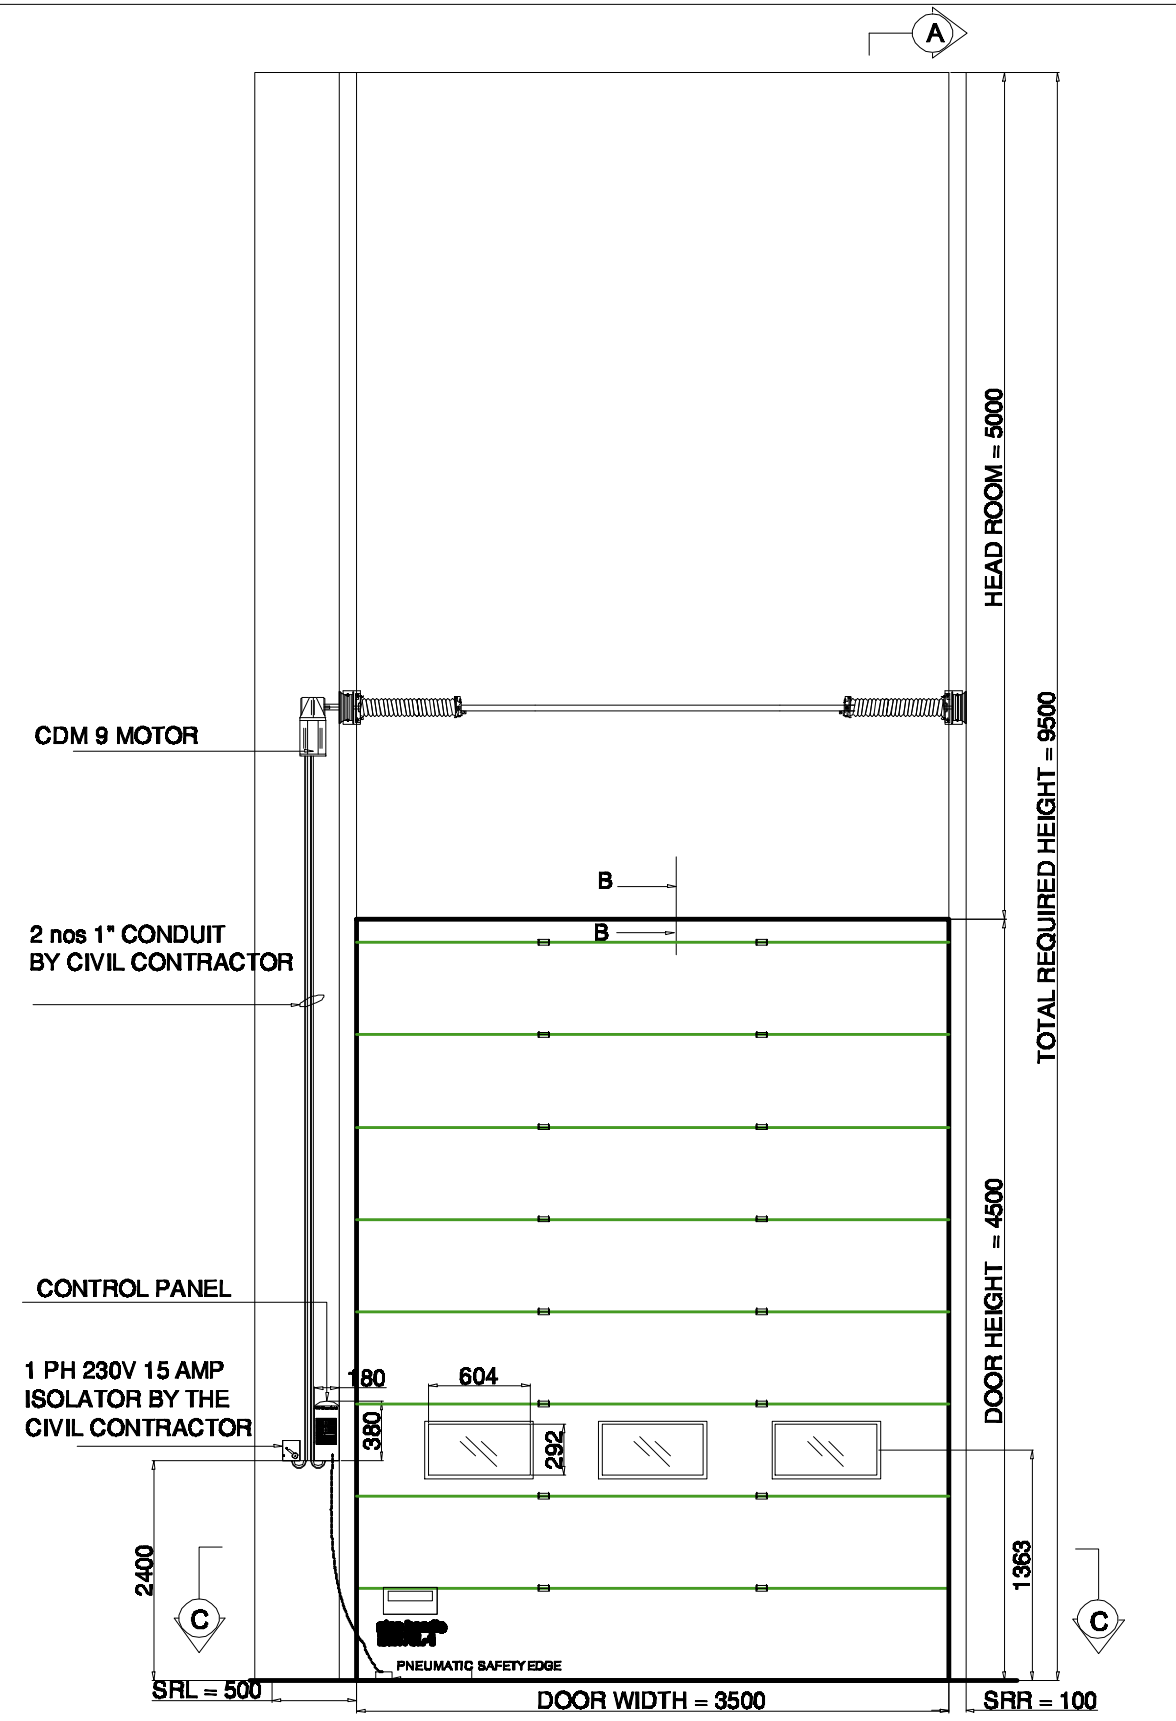
A
CDM 9 MOTOR
2 nos 1" CONDUIT
BY CIVIL CONTRACTOR
CONTROL PANEL
1 PH 230V 15 AMP
ISOLATOR BY THE
CIVIL CONTRACTOR
B
B
180
604
380
292
2400
C
C
PNEUMATIC SAFETY EDGE
1363
HEAD ROOM = 5000
TOTAL REQUIRED HEIGHT = 9500
DOOR HEIGHT = 4500
SRL = 500
DOOR WIDTH = 3500
SRR = 100

INTERNAL ELEVATION


A
OUTSIDE
SRL = 500
DOOR WIDTH = 3500
SRR = 100
INSIDE
DETAIL-2

PLAN AT C-C

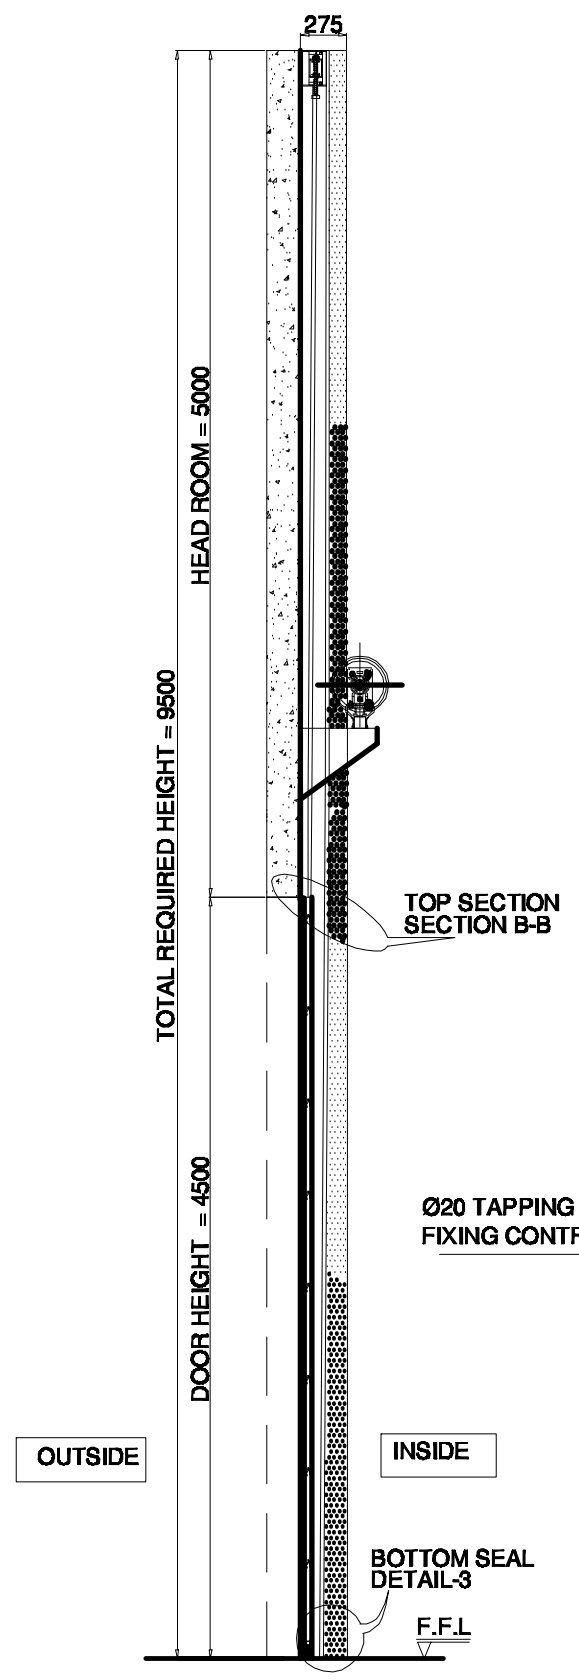
275
HEAD ROOM = 5000
TOTAL REQUIRED HEIGHT = 9500
DOOR HEIGHT = 4500
TOP SECTION
SECTION B-B
OUTSIDE
INSIDE
BOTTOM SEAL
DETAIL-3
F.F.L

SECTION A-A

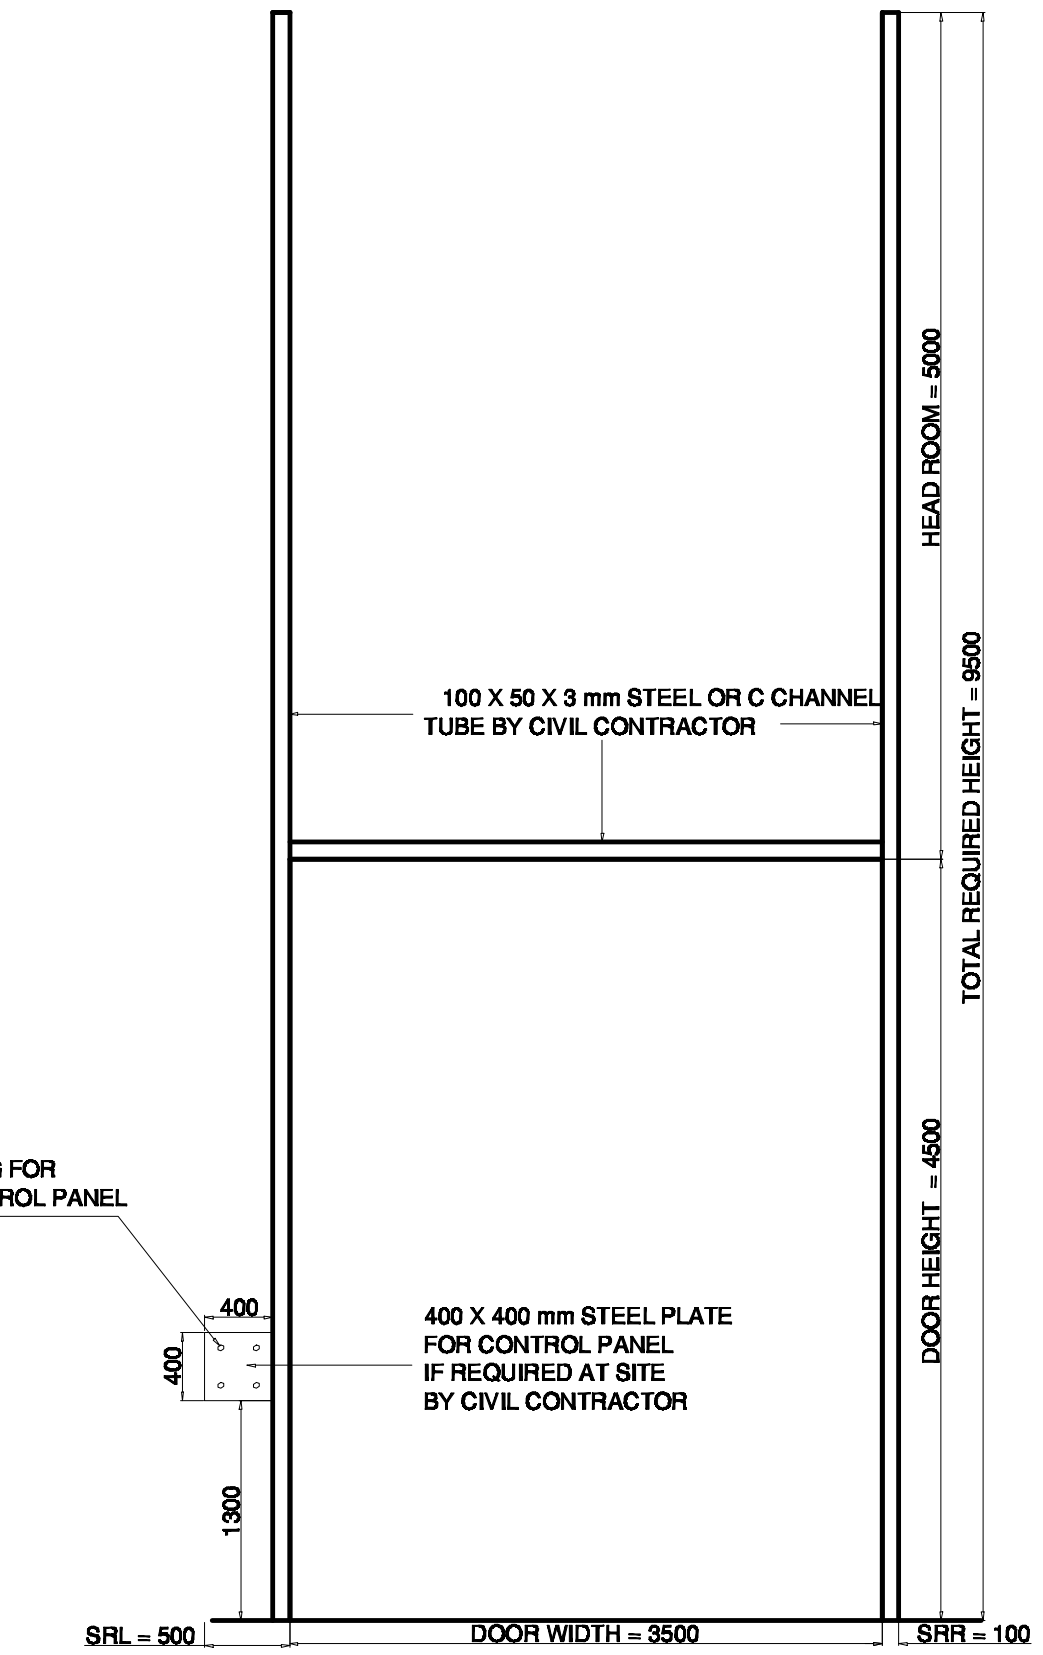
100 X 50 X 3 mm STEEL OR C CHANNEL
TUBE BY CIVIL CONTRACTOR
Ø20 TAPPING FOR
FIXING CONTROL PANEL
400
400
400 X 400 mm STEEL PLATE
FOR CONTROL PANEL
IF REQUIRED AT SITE
BY CIVIL CONTRACTOR
1300
HEAD ROOM = 5000
TOTAL REQUIRED HEIGHT = 9500
DOOR HEIGHT = 4500
SRL = 500
DOOR WIDTH = 3500
SRR = 100

PROPOSED FRAME IF CONCRETE IS NOT AVAILABLE AT SITE BY CIVIL CONTRACTOR

QTY	DOOR WIDTH DW	DOOR HEIGHT DH	HEAD ROOM (HR)	SIDE ROOM LEFT (SRL)	SIDE ROOM RIGHT (SRR)	DEPTH D
02	3500	4500	4000	500	100	550



STEP HANDLE (DETAIL-1)

FINGER PROTECTION


2mmTHK.
25mm
42 mm
DOOR
SECTION

TOP SEAL EPDM

SECTION B-B


Crawford
380
180

CONTROL UNIT



BOTTOM SEAL

EPDM RUBBER


100
SIDE SEAL
WALL
42 25
CONC. EXP. BOLT/STEEL SCREWS
C/C 800 MM (DEPENDING ON
THE SURFACE FOR FIXATION)
DOOR TRACK
GALVANISED STEEL
ADJUSTABLE
ROLLER BRACKET

ADJUSTABLE ROLLER BRACKET
(DETAIL-2)


1.
2.
3.
4.
5.
6.
7.
8.
9.
10.
OUTSIDE
COLOUR
RAL 9010
INSIDE COLOUR
NATURAL ALUMINUM

DOOR DESIGN

1. TOP SEAL
2. SECTION JOINT WITH FINGERPINCH PROTECTION AND SEALING
3. INNER AND OUTER SHEET
4. INTERNAL STEEL REINFORCEMENT, TO PROVIDE POSITIVE FIXING POINTS
5. WINDOW
6. HIGH IMPACT POLYSTYRENE FRAME
7. WIND REINFORCEMENT (IF NECESSARY)
8. STEP / LIFT HANDLE
9. INSULATION (CFC - FREE)
10. BOTTOM SEAL

DOOR DESIGN

NOTES

TO BE PROVIDED BY MAIN CONTRACTOR

1) SURFACE FOR FIXATION
a) SURFACE TO BE FLUSH AND IN ONE LEVEL
b) ANY OF THE FOLLOWING MATERIALS ARE SUITABLE FOR FIXATION (CONCRETE,HOLLOW BLOCKS IN FILLED WITH CONCRETE,STEEL,WOOD)
2) STRUCTURE TO CARRY THE ENTIRE WEIGHT OF THE DOOR

ELECTRICAL REQUIREMENTS

3) 1 PHASE 230V 15AMP INCOMING POWER SUPPLY NEAR THE CONTROL PANEL WITH ISOLATED SWITCH 15-A
4) 1"CONDUIT 1no FROM THE CONTROL UNIT TO OPERATOR TO BE PROVIDED BY MAIN CONTRACTOR
5) 1"CONDUIT 1no FROM THE ISOLATOR TO OPERATOR TO BE PROVIDED BY MAIN CONTRACTOR

MODEL NUMBER	1042 ALUMINUM
COLOUR	OUT SIDE -9010 IN SIDE - Natural aluminum
HARDWARE	VL

OPERATOR: CDM9 MOTOR TECHNICAL SPECIFICATION	
OPERATION	CDM-9
SUPPLY VOLTAGE VOLTAGE ELECTRICAL (INTERNAL) MOTOR IP CLASS	230 V 1-PHASE 50/60HZ 230V AC
DOOR WEIGHT(MAX)	400 Kg
DOOR SPEED OPENING m/s	0.25 m/s INCREASING SPEED AT START
DOOR SPEED CLOSING m/s	0.25 m/s DECREASING SPEED BEFORE STOP
OPERATOR WEIGHT Kg	13.5 Kg
CLASSIFICATION	IP55 (excl adaptor which is IP44)

CLIENT:
INGERSOL RAND INDIA
PRVT LTD

PROJECT:
INGERSOL RAND FACTORY
EXPANSION @ HMADABAD,
INDIA

TITLE:
CRAWFORD SECTIONAL DOOR

SUBCONTRACTOR/SUPPLIER

Crawford
ASSA ABLOY

DUBAI
P.O. BOX: 80983
TEL: 04-8852888
FAX: 04-8854919

ABU DHABI
P.O. BOX: 32996
TEL: 02-6318200
FAX: 02-6210607

DESIGNED BY:-	DATE: Oct-14-14
DRAWN BY:RTA	ALL DIMENTIONS ARE IN MM
CHECKED BY: VARG	SCALE:- N.T.S
APPROVED BY:-	
DRAWING NUMBER ME-11271	REV:- 01