NIHVA TECHNOLOGIES PVT. LTD.

Sales Quotation

Quotation No - SQT/17-18/0072R **Date : 28-11-2017**

Hettich India Pvt. Ltd.
302,Durolite House
Opp SAB TV, New Link Road,
Mumbai-400053 Maharashtra

Kind Attn : Mr. R K Singh
Email : RK_Singh@in.hettich.com
Contact No : 8160472030

Subject : Quotation for Base Support Automation

Dear Sir

Thank you for your opportunity and trust shown on "NIHVA." your preferred partner for innovative solutions.
This has reference to your above mentioned requirement as well as our subsequent communication; please find below our best offer.


Nihva Scope Of Supply

1.Vibrator Drive 500 Dia with CUH Controller Qty- 02
2.Optical Sensor with mechanical arrangement to sense the Base Support Qty- 04
3.Main Stand – Qy 02
4.Digital Counter – Qty 04
5.Escapement to ensure only programed quantity is filled = Qty 02
6.Linear Gravity Guide Dispenser to ensure base supports are directly filled into the bin which is kept adjacent to the existing system
7.Control Panel with AUTO ON/OF & Emergency Stop features Qty 02

Sequence Of Operation

1.The parts will be poured in bowl as per the drawings.
2.The oriented part will be feed through bowl feeder
3.The part will be released at a time, on to the final position on to the bin kept adjacent on the system
4.The bowl feeder will have a counting facility visible on small LCD screen
5.The bowl feeder will stop automatically after programed quantity is filled with help of ESCAPEMENT.
6.With help of Linear gravity Chute Dispenser parts will automatically go to bin
7.Hooter arrangement will raise a sound & visual alarm as filling is complete
8.Electrical Power:- Single Phase, 220 Volts, 3 Ampere

LAYOUT :

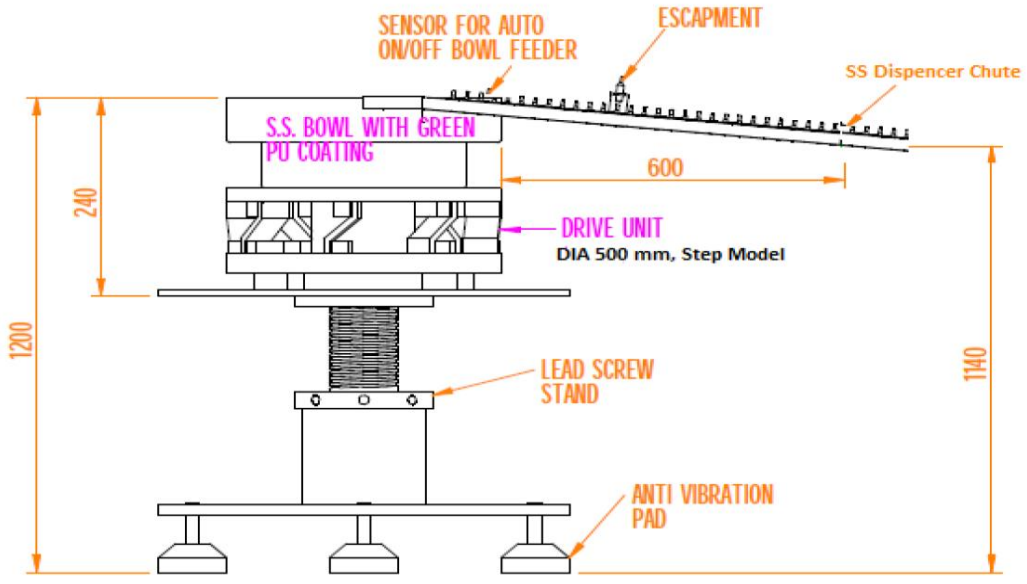

Techo-Commercial Offer

Sr.No	Description	Qty	Unit	Rate In INR	Net Amount INR
1	**VIBRATORY BOWL FEEDER**	2	2 Sets	5,08,000	5,08,000
	• Bowl Type : 500 Dia –Step Model				
	• Bowl Material : SS, 2.5mm thickness, Non Magnetic				
	• Vibrator Drive : Base Plate - CI Casting & Top Plate - Al Casting				
	• Vib./Bowl Direction: Clockwise				
	• No. Of Outlet Track : Double Track				
	• Inclination Degree of Outlet Track : 30 Degree				
	• Outlet track Material : SS				
	• End Treatment of Bowl Feeder : Matt/Mirror Finish				
	• Magnetic Coil : 170 VA , 50 Hz				
2	**NIHVA ESCAPEMENT**	2			
	• Pneumatic Cylinder & Accessories : FESTO/SMC Make				
	• Mechanical Setup : Base Plate : MS , Machined Parts Blackodising End Treatment				
3	**COUNTING SYSTEM**	4			
	• Digital Counter with LCD Display : FESTO/SMC Make				
	• Mechanical Setup & Optical Sensor for counting : Base Plate - MS , Machined Parts , Blackodising End Treatment				
5	**Main Stand with Anti Vibration Pads**	2			
6	**Dispenser Linear Chute**	2			
7	**Hooter**	2			
8	**Control Panel With Auto On/Off**	2			

GST PUNE:	**27AAECN0437H1ZM**

Amount in Words	**Total Project Cost**	**5,08,000**
	Rupees Five Lacs Eight Thousand Only	

Note : 1.The total cost of the system is calculated by considering per day production rate of 5,76,000 components/ day (400componets/min Approximately)
2. If installation required for above system it will charge extra.

The supply included only those mentioned in the quote & does not include

1 Unloading from truck placement on site

Terms and Conditions :

1	Price	:	Ex. Works Pune
2	P & F Charges	:	3% Extra
3	Freight Notes	:	Extra as applicable
4	Delivery	:	6-7 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing approval.
5	Payment	:	80% advance along with confirm Purchase Order & balance before dispatch
6	Insurance	:	Extra if applicable
7	Tax	:	GST: Extra as Applicable as per government standard
8	Validity	:	Validity of Offer is 15 days from the of quotation
9	Warranty	:	12 Months from the date of supply

Please feel free to Contact Mr. Mayur Derle on 7709209333 For any further Clarification /Information in this Concern.

With Best Regards

Pooja Badre

7709586333

For Nihva Technologies Pvt Ltd