



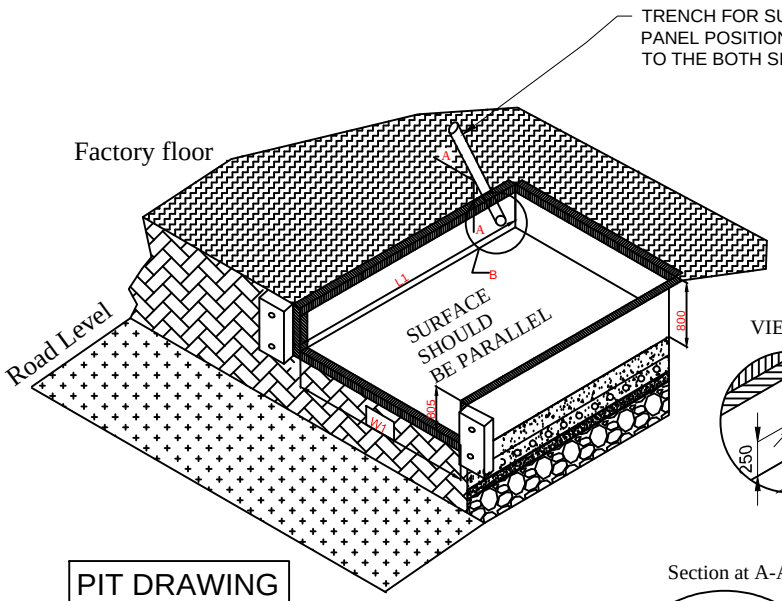



PIT DRAWING




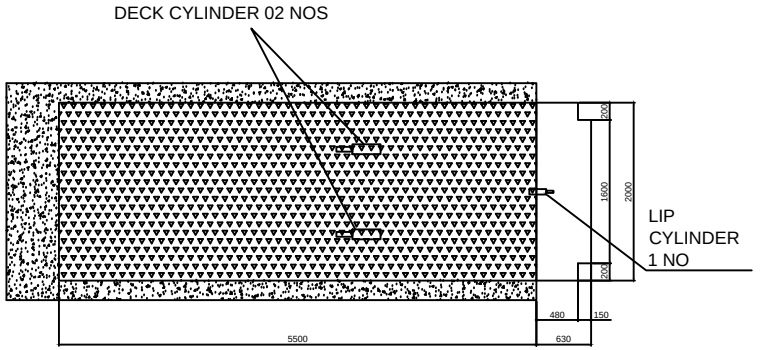

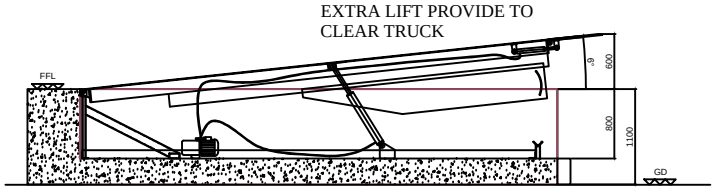



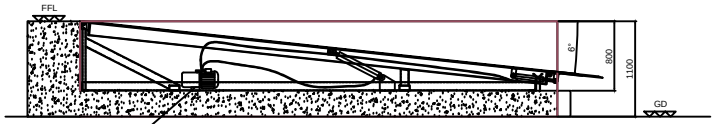



1 HP,3 Phase HYDRAULIC POWER PACK (ANCHORED ON PCC FLOOR)

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 9000 KGS FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING.
5. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE + 10 MM.
6. PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER (6 TON) CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
7. CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2000	5500	800	630	200X300X100

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	5500	805	

REV NO	DATE	DRAWN	REMARK
R01	12.02.20	P.A	1. BUMPER DETAILS ADD

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER - 6 TON

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Website:- www.nihva.com
Email:- info@nihva.com

	NAME	SIGN	DATE
DRAWN	P.A		15.01.2020
CHECK	G.J		15.01.2020
APPRD.			

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

CLIENT - L & T HYDRO CARBON
PROJECT - IOCL
SITE LOCATION - ODISHA
DWG. NO. : NIHVA/19-20/0197/R01
REV- R01
SCALE: NTS
WT:
SHEET: 01 OF 01