NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

M/s. Synergy Pharmaceuticals Corporation Pvt Ltd.
No. 282/1, 4th floor CBS building,
Galle Road, Colombo 3, Sri Lanka.

Date : 02.05.2020
Quote NO : SQT.19.20.2538
Kind Attn : Ms Priya Dissanayake
Email Id : priya@fujilpl.com
Contact No: **+94 77865993**

Project Name & Location:

Subject : Quotation for High Speed Door, Insulated Rolling Shutter, Manual Rolling Shutter, Dock Leveller, Dock Shelter, Dock Bumper and wheel Guides

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2,3,4
C.	General Conditions	5
D.	Terms & Condtions	5

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in USD		Installation Charges in USD	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	High Speed Door ((ASSA ABLOY) HS9020G)	2400	4000	12	8,700	1,04,400	715	8,580
2	High Speed Door ((ASSA ABLOY) HS9020G)	1850	4000	1	8,986	8,986	715	715
3	Insulated Rolling Shutter	2400	2700	4	3,600	14,400	715	2,860
4	Insulated Rolling Shutter	2400	4000	2	4,143	8,286	715	1,430
5	Manual Single Skin Rolling Shutter	2000	2300	1	829	829	715	715
6	Manual Single Skin Rolling Shutter	3000	3000	0	1,129	-	715	-
7	Manual Single Skin Rolling Shutter	3500	3500	6	1,429	8,574	715	4,290
8	Dock leveller	2200	3000	4	3,357	13,428	715	2,860
9	Dock Shelter	3450	3600	4	1,900	7,600	715	2,860
10	Dock bumper - 250 x 450 x 350 mm			4 Pair	114	456	50	200
11	Wheel Guide - 2 Mtr			4 Pair	215	860	100	400
				Total		**1,67,819**		**24,910**
	P&F Charges			3%		**5,035**		
	Total Without Taxes					**1,72,854**		**24,910**
	GST Extra @ 18%			18%		31,114		4,484
	Total With Taxes					**2,03,967**		**29,394**
12	Transportation Charges					**In Client Scope**		
13	Unloading Charges @ Site					**In Client Scope**		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

ASSA ABLOY Make Rapid Roll Up Door HS9020G




HS9020G



SIDE GUIDES



Safety Facilities



Sr. No	Description	Specification
1	Area of Use	Interior applications.
2	Drive System	Gravity Driven System
3	Opening Speed	up to 2.0 m/s depending on size of door.
4	Closing Speed	up to 0.5 m/s depending on size of door.
5	Photocells	Inside Columns
6	Safety	• Flexible soft bottom edge including wireless edge activator. • Break-away and self-repair function.
6	Wind Load Resistance	(EN 12424) Class 1 (300 Pa (N/m^2)). Maximum wind load while closing 50 Pa (N/m^2)
7	Water Penetration	(EN 12425) Class 2 (50 Pa (N/m^2)) 20 minutes water spray
8	Air Permeability	(EN 12426) Class 1 (24 $m^3/m^2/h$ at 50 Pa)
9	Thermal Resistance	(EN 12428) 6,02 $W/(m^2K)$
10	Temperature Working Range	5 °C to +40 °C
11	Door Curtain	900 g/m^2 colored PVC, Flexible door curtain without ridged parts
12	Various Window	400 mm height single row
13	Operator	220V - 240V 1-phase 0,75 kW 16A
14	Operator Protection	IP65. Soft start/stop significantly prolongs motor lifespan.
15	Control Unit Protection	IP54
16	Lifetime Expectations	1,000,000 cycles
15	Side Column	Unique side column technology provides excellent seal on all 4 sides thereby reducing heat loss
16	Lifetime Expectations	1,000,000 cycles
15	Control Unit Protection	IP54
16	Motor	The motor with frequency converter guarantees smooth and reliable operation.
15	Control Unit Protection	Control unit with display, impulse Up and Down buttons, an emergency stop mushroom button and a mechanical main switch.
16	Lifetime Expectations	1,000,000 cycles

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

Double Wall Motorised Rolling Shutter (NIHVA Make)





Sr. No.	Description	Specification
1	**Curtain**	Made of double skinned galvanised steel laths with PUF Insulation
2	**Hood Cover**	Pressed galvanised steel hood & motor cover with two coats of Polyurethane
3	**Drive Type**	Direct DRIVE
4	**GI Slat**	19mm Thick
5	**Profile**	Curved Type Profile with heavy duty Shaft
6	**Guide**	2.5 mm Thick MS Guide
7	**Hood Cover & Motor Cover**	0.9 mm Thick GI material

Manual Single Skin Rolling Shutter


Sr .No.	Specification	MS Gear Operated Rolling Shutter
1	Description:	Gear Operated Rolling Shutter with MS Laths with thickness of 1 mm.
2	Mounting Location area	Inside area / Outside area
3	Mounting Surface	Side Brackets: Optional = On Concrete
4	Curtain Panel	The panel made of 1.0mm thick MS.
5	Curtain panel size	75mm wide
6	Curtain Profile	Curved
7	Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	Side Guide Profile	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
9	Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	Hood Cover	Made of GI Sheet Thickness 1 mm
11	Surface finish	Two Coats of Primer and two coast of Synthetic Enamel
12	Operation	Gear Assembly.


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

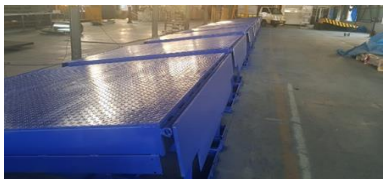



Description	Specifications
Capacity	6 Ton Point Load
Dock operation mode	AC power pack hydraulically operated
Lip operation mode	Hydraulic
Operation control	Through panel
Loading platform height from road	1250mm
Travel above & below dock level	(+) 300 / (-) 250 mm
Platform Size (W x L)	2200 mm x 3000 mm
Lip size (W x L)	2200 x 400 mm
Shut Height	480 mm
Overall length	2200 mm x 3000mm + Lip Length (400mm)
Maximum slope can be achieved	10%
Clear Pit dimensions (W x L x D)	(W) 2240mm x (L) 3000 mm x (D)480 mm
Hydraulic power pack	Standard
Driver type	Direct by electric Motor
Motor Ratings	1 H.P
Pump design flow	2.5 LPM
Pump pressure	120 bar Operating 200 bar Max.
Safety valve set pressure	120 Kg/cm²
Pump Type	Gear
Volume of oil receiver	7 Lit
No Of Deck cylinder	2 No
Lip Cylinder	1 No
Dock Bumper	Pair of Dock Bumper

ASSA ABLOY Retractable Dock Shelter (DS6060A)




Sr. No.	Description	Specification
1	Size (W X H)mm	3450 x 3600
2	Nominal depth	600, 900 mm
3	Top curtain	1000mm
4	Side Curtain	600mm
5	Curtain Color	Black
6	Parking Guide	White, Yellow
7	Wall fixings	Concrete, sandwich, light concrete, load house, cavity, insulated pannel
8	Top & Side curtains	Double layer high quality polyster
9	Thickness	3mm
10	Continous Roof Cover	one layer high quality polyester
11	Thickness	0.5mm
12	Flammibility all curtains	DIN 75200

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex Works Pune

Frieght : Excluded

Delivery : 13-14 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Taxes : Import/Export - taxes/duties excluded.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Arjun Patil on 8551096333**

With Best Regards
Varsha
8350570333
For NIHVA Technologies Pvt Ltd