


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2130	4000	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2180	4080	485	




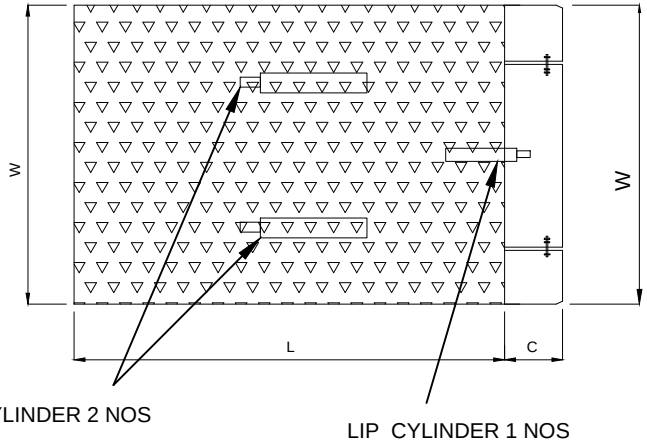

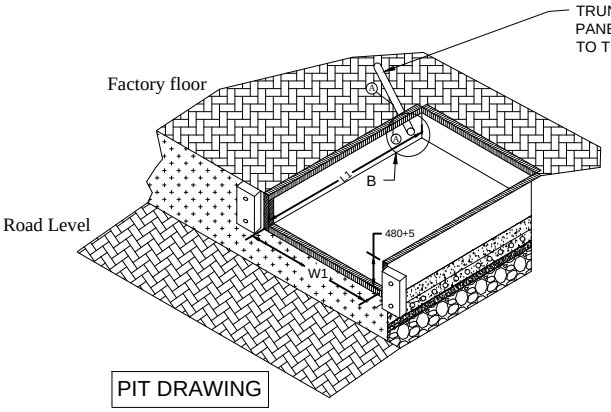

PIT DRAWING



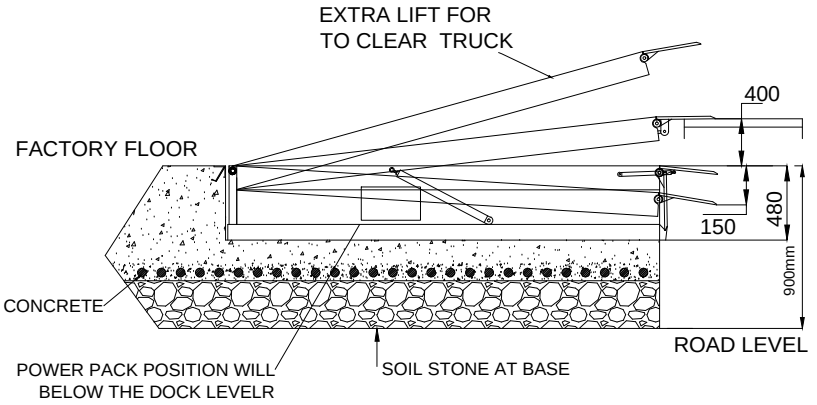

NOTE:-

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

REVISION 1- DOCK LEVELER WIDTH & LENGTH ARE REVISED DUE TO LESS FACTORY FLOOR HEIGHT FROM ROAD LEVEL 900mm.

DOCK LEVELER- 09 TON CAPACITY - 05NOS.

CLIENT APPORVAL-	DATE	SIGN.
DRAWN :- SURAJ	04/10/2017	
CHECKED :- SHEKHAR	04/10/2017	
APPROVED :- SHEKHAR	04/10/2017	
ALL DIMENSION ARE IN mm		
If any queries contact : projects@nihva.com		

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - S.W.MONE & ASSOCIATES.

PROJECT -BERICAP INDIA PVT. LTD.

SITE LOCATION -TALEGAON MIDC,PUNE

DWG. NO. - NIHVA/17-18/0220/R01