
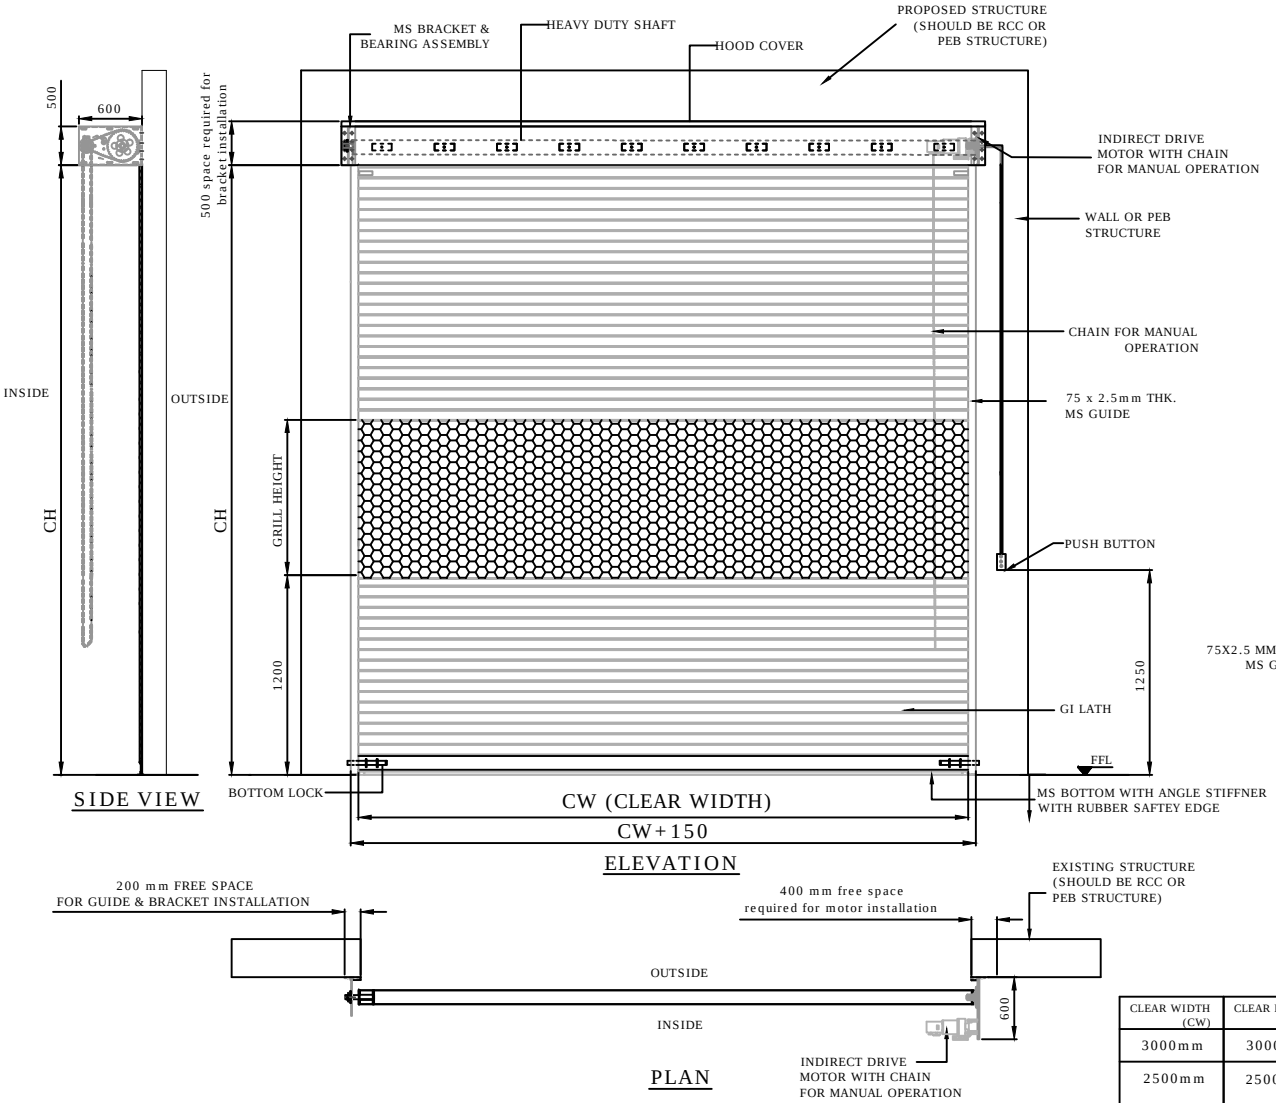


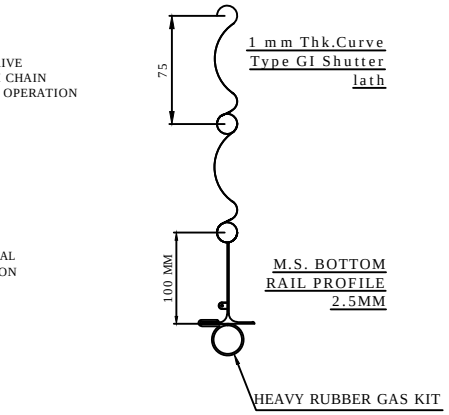

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY	GRILL HEIGHT	LOCATION
3000mm	3000mm	01 NOS	750mm	FACILITIES & DTZ CONTROL ROOM
2500mm	2500mm	02 NOS	625mm	TESTING BUILDING 1.COMPRESSOR ROOM 2.WASTER WATER NEUTRALIZATION ROOM

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
3000	3000	01 NOS
2500	2500	02 NOS

MATERIAL:

THICKNESS :

NOTE:
1. REQUIRED STRUCTURE FOR ROLLING SHUTTER WILL BE CLIENT'S SCOPE.
2. ONE COAT OF RED OXIDE PRIMER WILL BE GIVEN TO THE SHUTTER.
3. SINGLE PHASE. 3 CORE 1.5 SQ. CABLE REQUIRE AT SITE(CLIENT'S SCOPE)
4. FINAL FINISH WILL BE AS SUPPLIED EARLIER.

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

MOTORIZED ROLLING SHUTTER

CLIENT'S APPROVAL :

CLIENT - TATA PROJECT LTD.

PROJECT -ALSTOM.

SITE LOCATION - HYDERABAD

DWG. NO. : NIHVA/17-18/0207

SCALE: NTS	WT:	SHEET:1 OF 1

DRAWN BY: SURAJ	DATE: 19-09-2017
CHECK BY : SAGAR P.	DATE: 19-09-2017
APPROVED BY :SHEKHAR	DATE: 19-09-2017

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGN IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.