

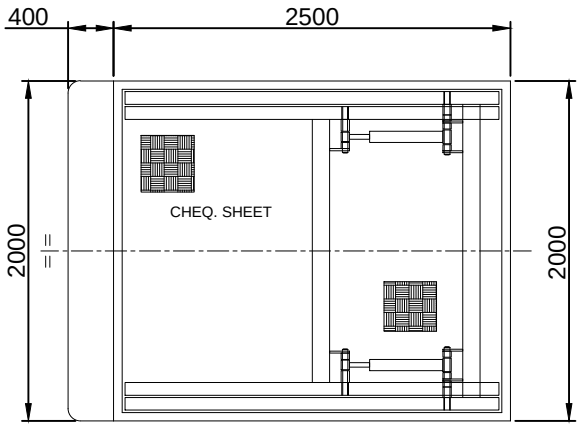



TOP VIEW

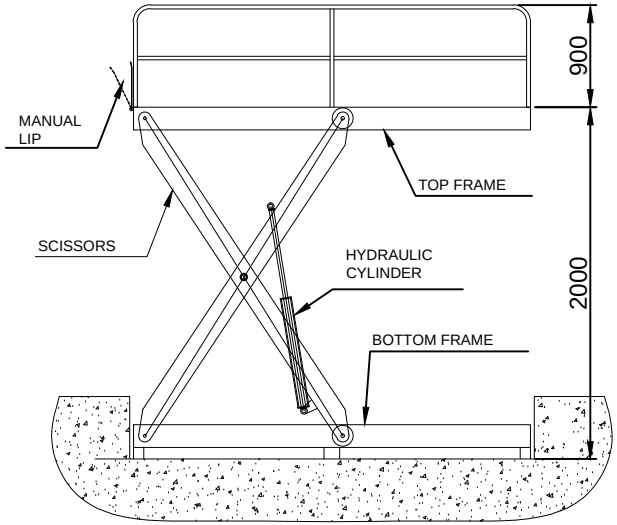

OPEN HEIGHT FRONT VIEW

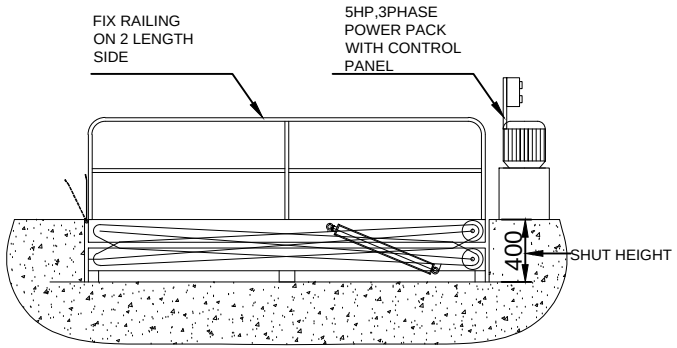

CLOSED HEIGHT FRONT VIEW

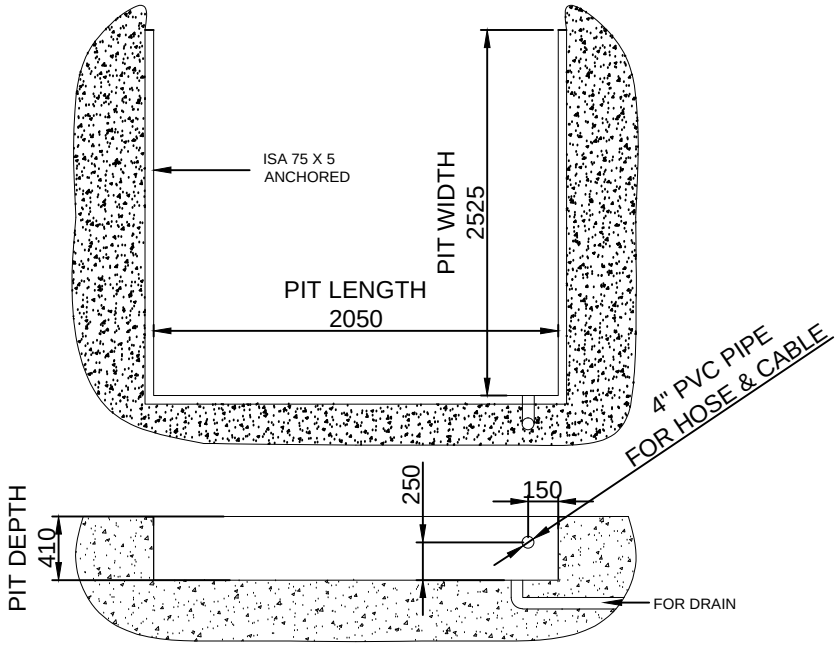

PIT DRAWING

NOTE :

1. PIT FOR SCISSORLIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
4. COVERING REQUIRED FOR CABLES AND RELATED CIVIL WORK IS IN CLIENTS SCOPE
5. WATER DRAINAGE AND PIT CLEANING NEEDS TO BE CONSIDERED AND DONE BY CLIENT
6. PIT & ALL CIVIL WORK IS IN CLIENT SCOPE.
7. TOLERANCE ± 10 MM.

SAFETY RAILING	900 MM HT
POWER PACK	5HP,3PHASE
MAX HT	2000MM
LIFT HT	1600 MM
SHUT HT	400 MM
PLATFORM SIZE	2000W x 2500L
CAPACITY	1.5 TON

Rev No.	Revision 01	Date: 24-11-2021	Revised By : GIP

Revision 01: 1) Shut height changed from 500mm to 400 mm.
2) Pit height reduced from 500mm to 400 mm.
3) Railing height changed from 800mm to 900mm.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE:- PIT MOUNTED SCISSOR LIFT

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	SIGN
DRAWN	SUJATA.B	25/10/2021	
CHECK	G.PATIL	25/10/2021	
APPRD.	A.KURHADE	25/10/2021	

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

CLIENT -

LOCATION -

PRODUCT - SCISSOR LIFT

DWG NO:-NIHVA\21-22\VDR\0114 REV- 01

SCALE: NTS SCALE:-- 1:1 SHEET: 01 OF 01