

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2200	2450	540	400


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)
DL1	2240	2500	540
DL2	2240	2510	550
DL4	2250	2500	550
DL5	2250	2500	555
DL7	2244	2500	555


NOTE : ALL DIMENSIONS ARE IN mm

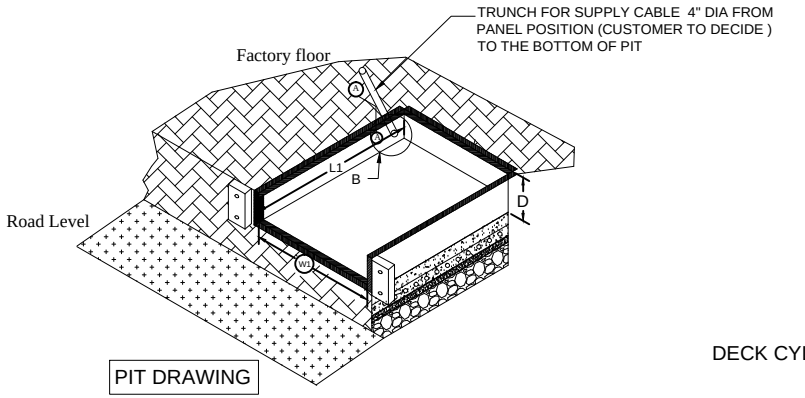


PIT DRAWING

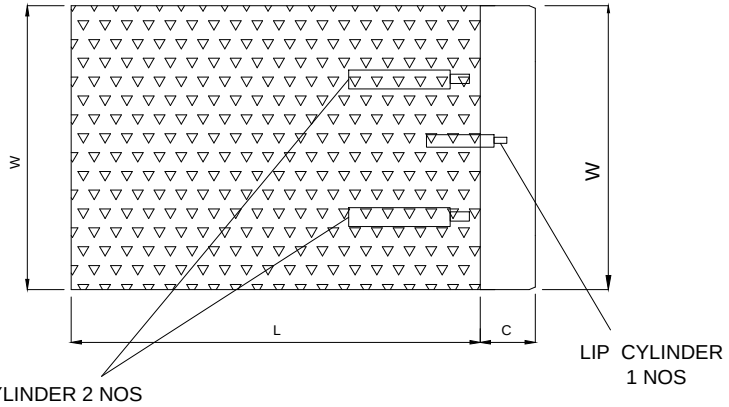





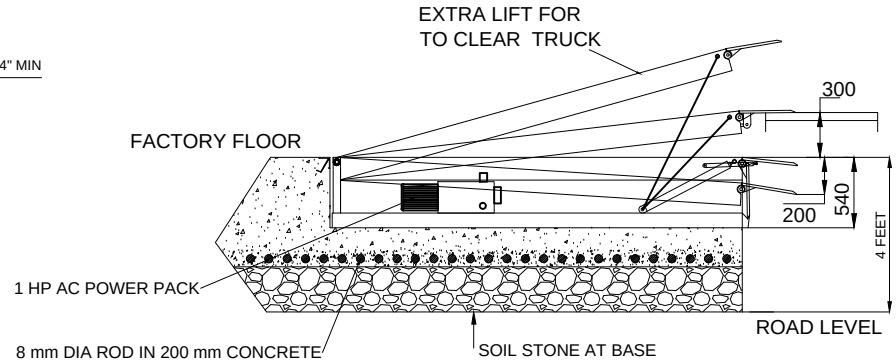

DOCK LEVELER- 9 TON CAPACITY

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 5000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

CLIENT APPORVAL-			
		DATE	SIGN.
DRAWN	PRADEEP	25.04.2018	
CHECKED	OMKAR	25.04.2018	
APPROVED		25.04.2018	
ALL DIMENSION ARE IN mm			
If any queries contact : design@nihva.com			

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - IKEA PROJECT	
PROJECT -	
LOCATION - CHAKAN_3	
DWG. NO. - NIHVA/18-19/0013.	REV:- 00