

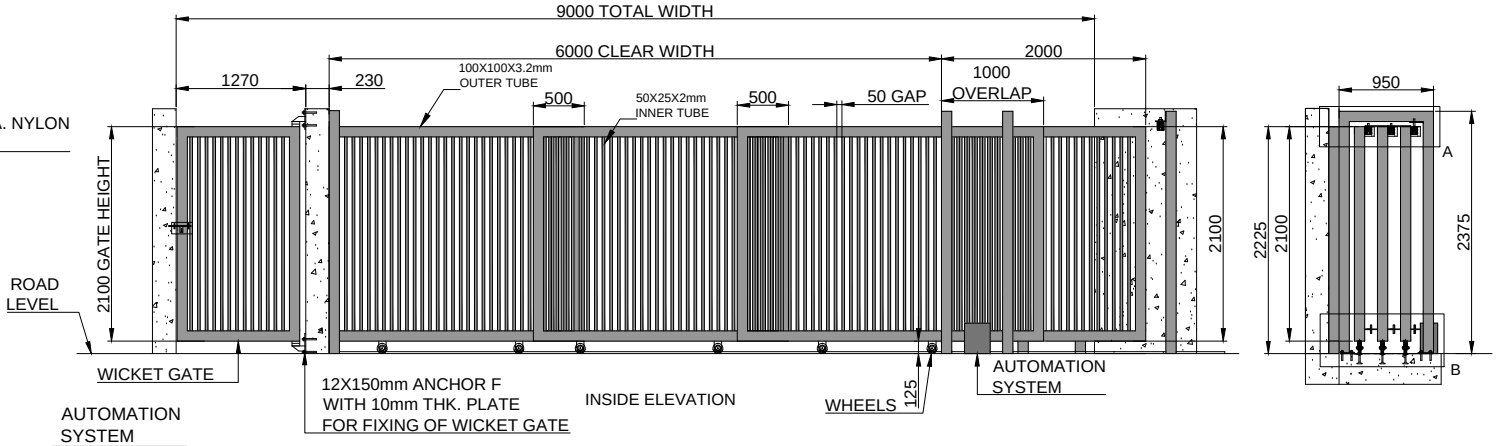



DETAILED VIEW OF A

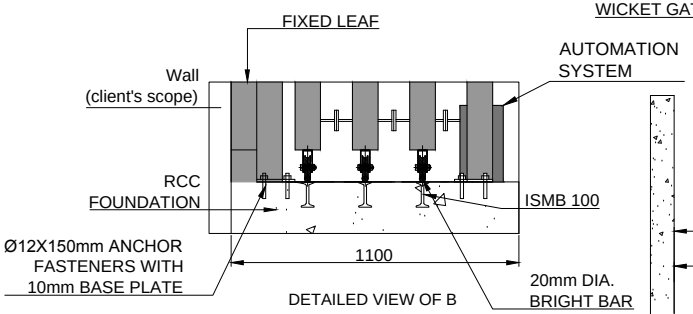


DETAILED VIEW OF B

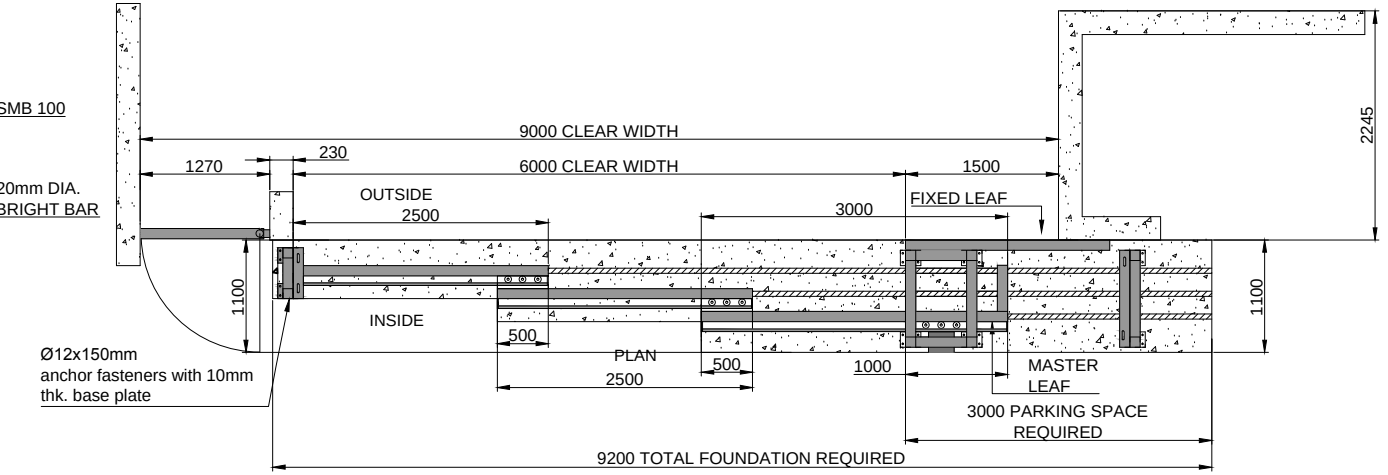


REV 1- a.FIXING DETAILS ARE SHOWN AS PER REQUIREMENT.
b. FOUNDATION WIDTH REVISED FROM 1000 TO 1100mm.

| SR NO | TUBE SPECIFICATION | |
|---|---|---|
| 1 | MS 100X100X3.2mm | OUTER TUBE |
| 2 | MS 50X25X2mm | INNER TUBE |

NOTE-
1. ALL REQUIRED CIVIL WORK WILL BE IN CLIENTS SCOPE.
2. ONE COAT OF RED OXIDE & TWO COAT OF APPROVED RAL SHADE WILL BE GIVEN TO THE GATE.
3.IF NECESSARY GATE LEAF WILL BE IN TWO PARTS FOR TRANSPORTATION & WILL BE WELD TOGETHER ON SITE.

| GATE WIDTH | GATE HEIGHT | QUANTITY | LOCATION |
|---|---|---|---|
| 6000mm | 2100mm | 1 NOS | SECURITY CABIN 1 |

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
AUTOMATIC THREE LEAF TELESCOPIC GATE & WICKET GATE 2

| | NAME | DATE |
|---|---|---|
| DRAWN | OMKAR | 30/10/17 |
| CHECK | SHEKHAR | 30/10/17 |
| REV. | | |
| APPROVAL | SHEKHAR | 30/10/17 |

If any queries contact : projects@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - LUPIN LIMITED
PROJECT -
SITE LOCATION - MIHAN, NAGPUR
DWG. NO. : NIHVA/17-18/0236/R01 | REV -1
SCALE: NTS | WT: | SHEET: 01 OF 01