


DOCK LEVELER OVERALL SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2000	2500	485	400


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	2500	485	

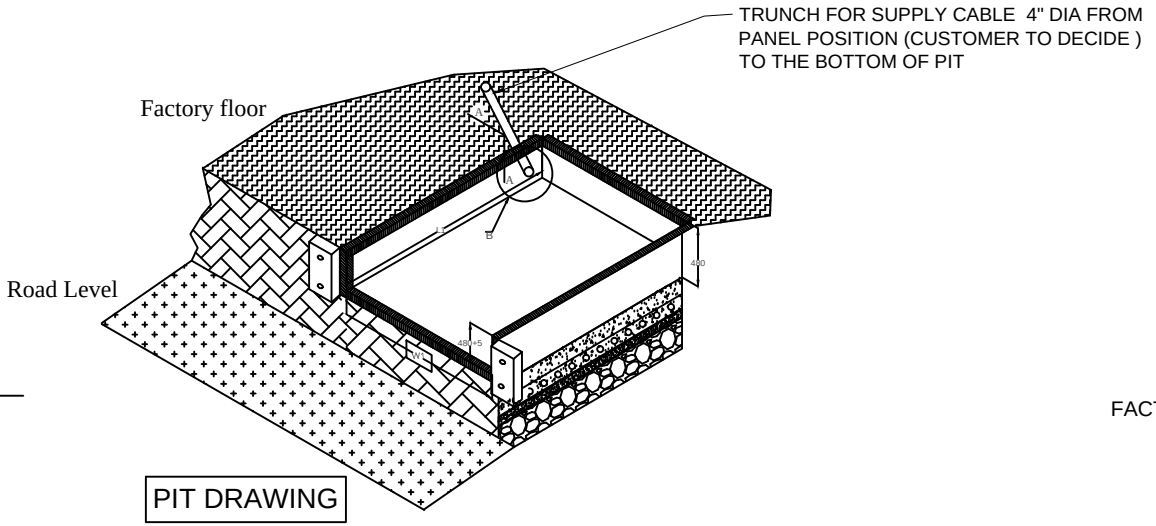


PIT DRAWING

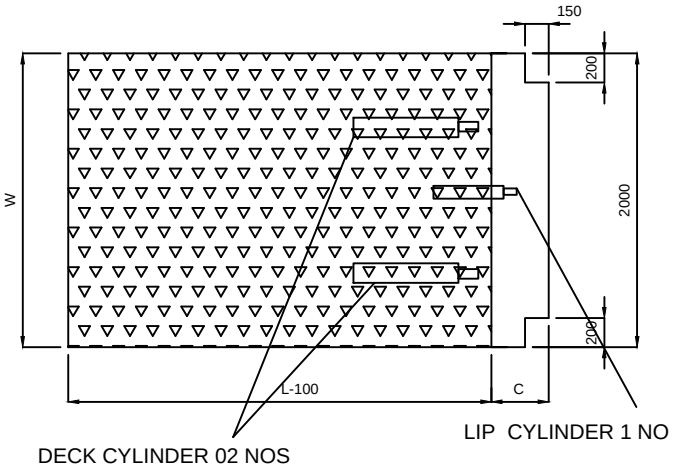

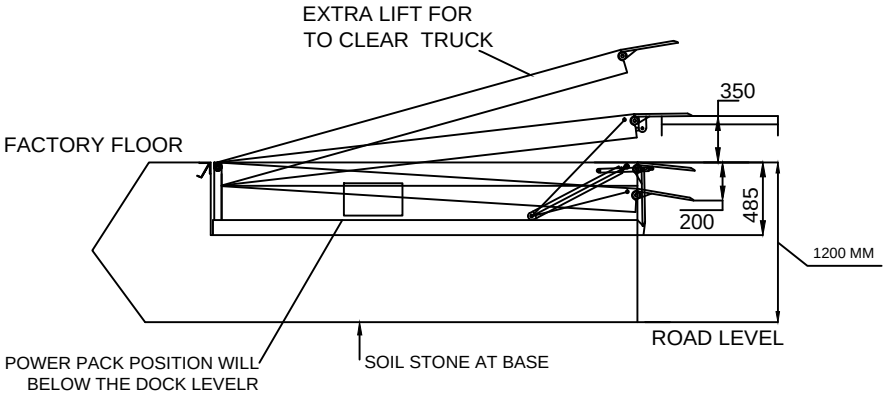



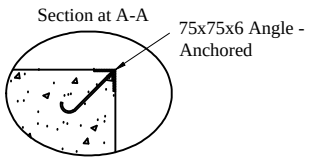

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 15000 KG POINT FLOOR LOADING.
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER- 12 TON POINT LOAD CAPACITY

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER				NIHVA TECHNOLOGIES PVT. LTD. PUNE
	NAME	SIGN	DATE	NIHVA TECHNOLOGIES PVT. LTD. Website:- www.nihva.com Tel : 020 66304033 Email:- info@nihva.com
DRAWN	S.M.S.		6.7.2021	CLIENT - CRANE CHEM PHARMA & ENERGY
CHECK	S.M.S.		6.7.2021	PROJECT -
APPRD.				SITE LOCATION - SATARA
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/21-22/032/DL — REV- 00
ALL DIMENSION ARE IN mm				SCALE: NTS — WT: — SHEET: 01 OF 01