

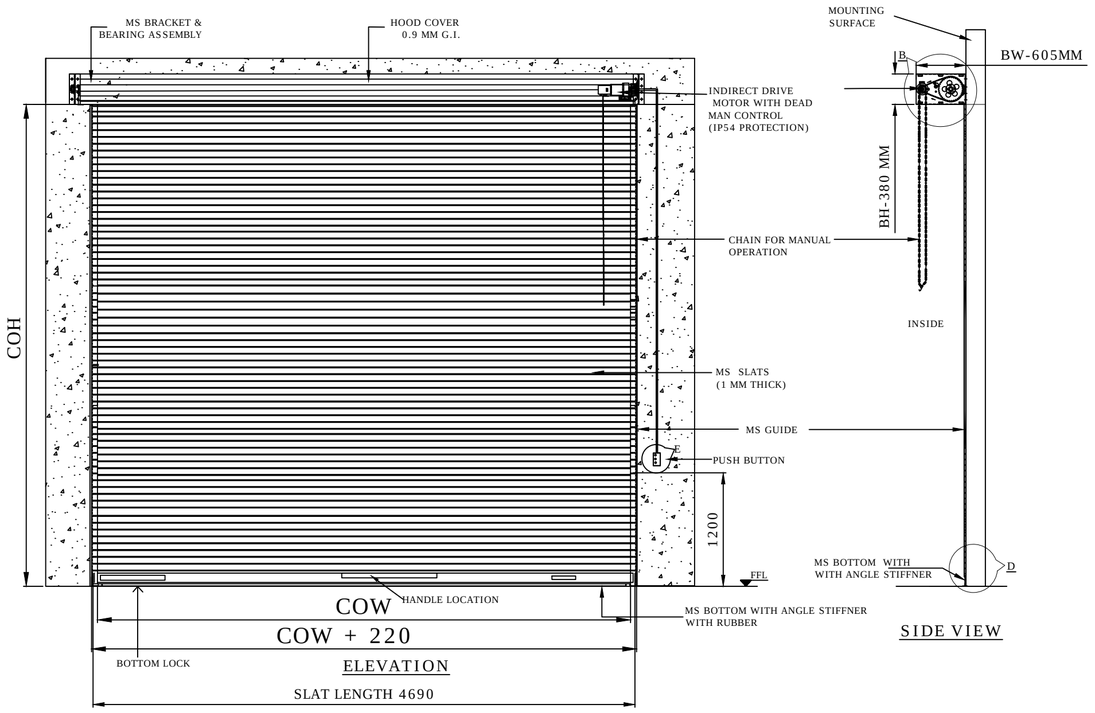



ELEVATION

SIDE VIEW

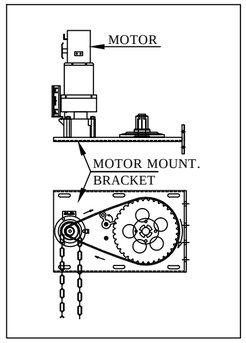


DETAILS : A & B

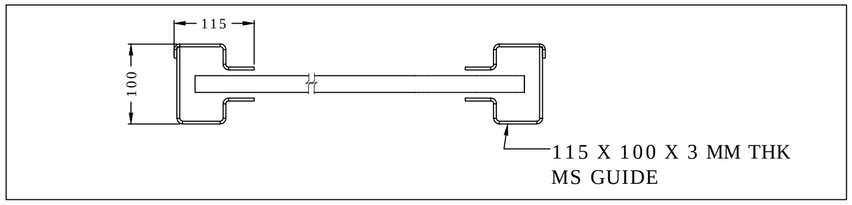


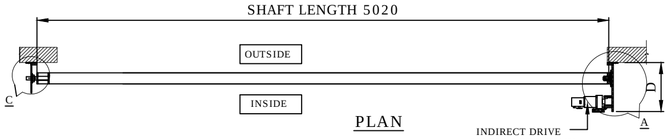

PLAN

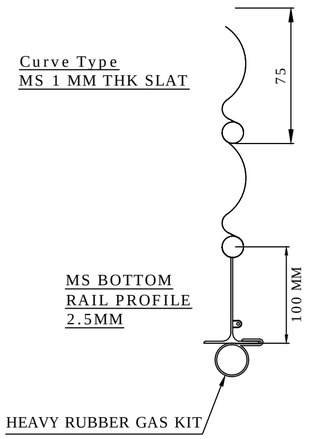

DETAILS : D

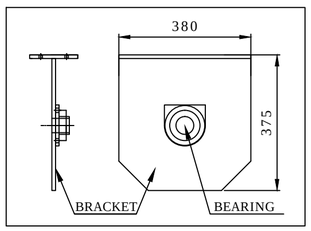

DETAILS : C

NOTES-

1. REFER RAL SHADE CHART & CONFIRM RAL SHADE FOR PAINTING .(IF ANY OTHER , KINDLY INFORM TO NIHVA).
   PRIMER: EPOXY POLYAMIDE BASED ZINC PHOSPHATE PRIMER.
2. MOUNTING OF ROLLING SHUTTER GUIDES WILL BE ON MS STRUCTURE, PLEASE CONFIRM THE SAME.
3. IF REQUIRED ALL CIVIL WORK , STRUCTURE & ITS FITTING IS IN CLIENT SCOPE .
4. SPACE OF 550 MM IS REQUIRED ABOVE CLEAR OPENING HEIGHT FOR INSTALLATION OF SHUTTER.
5. CLEAR OPENING HEIGHT AFTER SHUTTER INSTALLATION WILL BE 150 MM LESS THAN WALL OPENING HEIGHT .
6. MANUAL CHAIN IS ONLY USED FOR EMERGENCY OPERATION.

Revision-02

1. Motor bracket size changed.
2. Slat length and shaft length added.
3. Shaft bracket dimensions added.
4. Side bracket length modified.

SR NO	CLEAR OPENING WIDTH (COW)	CLEAR OPENING HEIGHT (COH)	QTY	RAL COLOR FOR PAINTING
1	3000	3800	1 NOS	RAL 9007 (Metallic grey)

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE

MOTORIZED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	SIGN	DATE
DRAWN	G.I.P.		18.08.2021
CHECK	A.K.		18.08.2021
APPRD.	V.T.		18.08.2021

CLIENT - SCON PROJECTS

PROJECT -

SITE LOCATION - NASHIK

If any queries contact :design@nihva.com | DWG. NO. : NIHVA/21-22/0210 | REV- 02

ALL DIMENSION ARE IN mm | SCALE: NTS | WT: | SHEET: 02 of 04