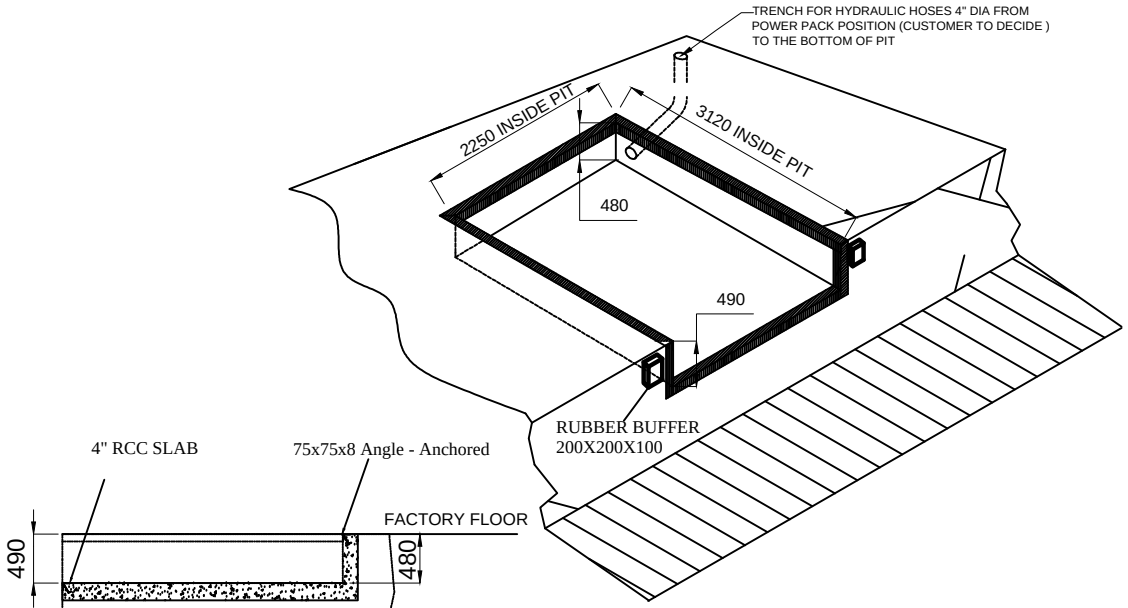
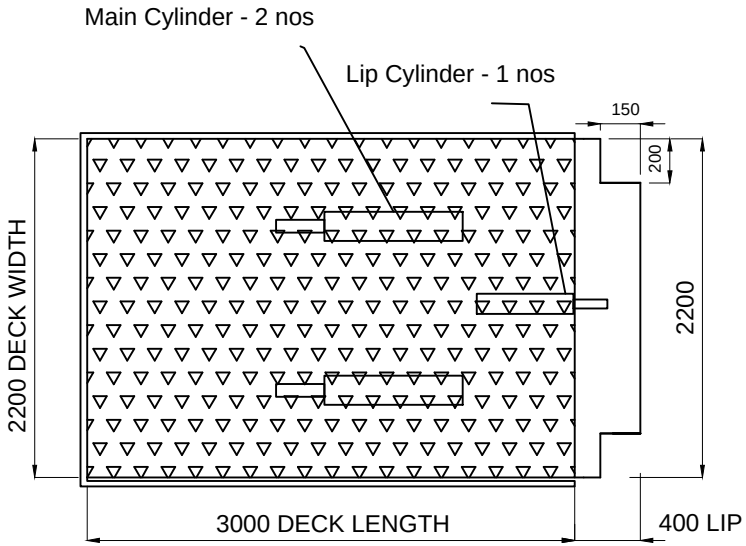
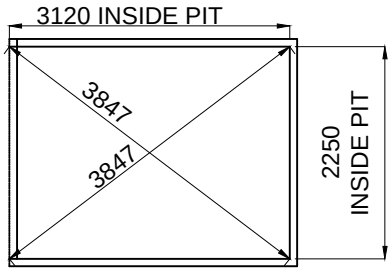
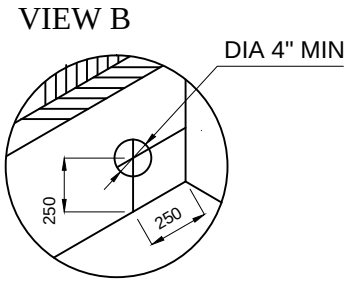
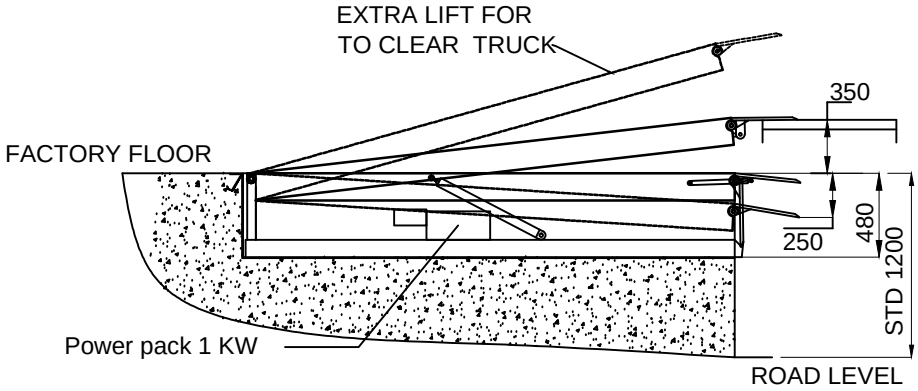



NOTE:

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION ( SUPPLY HOSE LENGTH STD. 3000 MM )
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 15000 KGB FLOOR LOADING
4. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE ± 10 MM .
5. PIT, DUCT FOR HOSES & ALL CIVIL WORK IS IN CLIENT SCOPE .

SPECIFICATIONS OF DOCK LEVELER -

1. PLATFORM SIZE -2200WX3000L
2. LIFT ABOVE- 350 MM
3. LIFT DOWN-250 MM
4. PIT SIZE- 2250WX3120LX480D
5. CAPACITY - 12 TON
6. FINISH - PAINTING GOLDEN YELLOW RAL 1004 (NIHVA STANDARD)
7. QTY - 3 NOS
8. HYDRAULIC POWERPACK - 1kW , 3 PHASE AC , 50 Hz

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

| TITLE | | | NIHVA TECHNOLOGY PVT. LTD. PUNE |
|---|---|---|---|
| PIT MOUNTED ELECTRO-HYDRAULIC DOCK LEVELER | | | NIHVA TECHNOLOGIES PVT. LTD. Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com |
| | SIGN | DATE | |
| DRAWN | SS | 26.7.2021 | CLIENT - |
| CHECK | VJ | | PROJECT - |
| REV. | AK | | SITE - |
| APPROVAL | VT | | DWG. NO. : NIHVA/21-22/047/DL/VDR / REV NO - R00 |
| If any queries contact : nihvacare@nihva.com | | | SCALE: NTS / WT: / SHEET: 01 OF 01 |
| ALL DIMENSION ARE IN mm | | | |